

Magnetic Track System M19




Magnetic Track System


M19




1.5M/2M
M19H
Hanging




1.5M/2M
M19E
Hanging




1.5M/2M
M19H
Surface Mounted




1.5M/2M
M19E
Surface Mounted







1.5M/2M
M19A
Embedded







1.5M/2M
M19T
Embedded




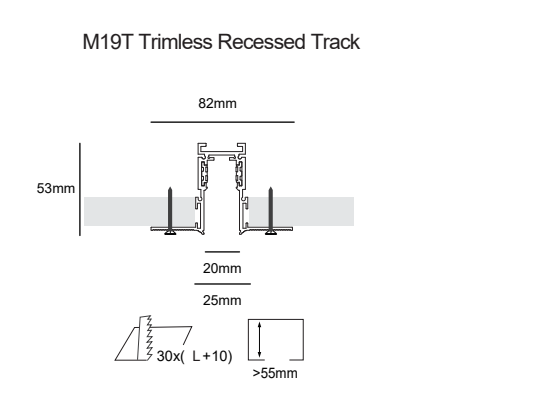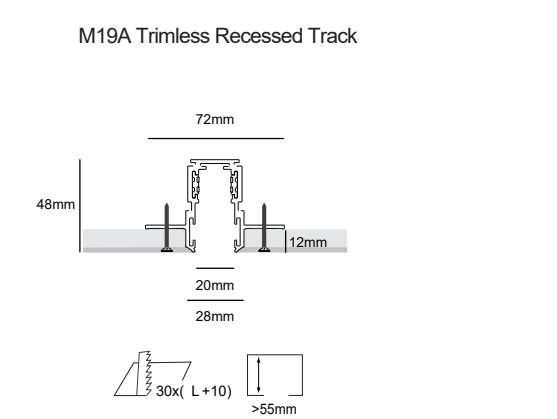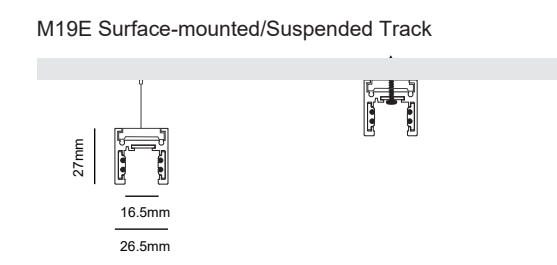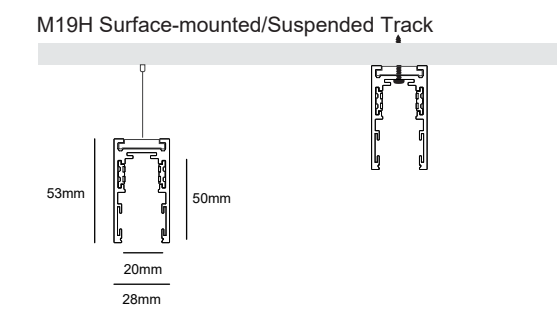

M19H

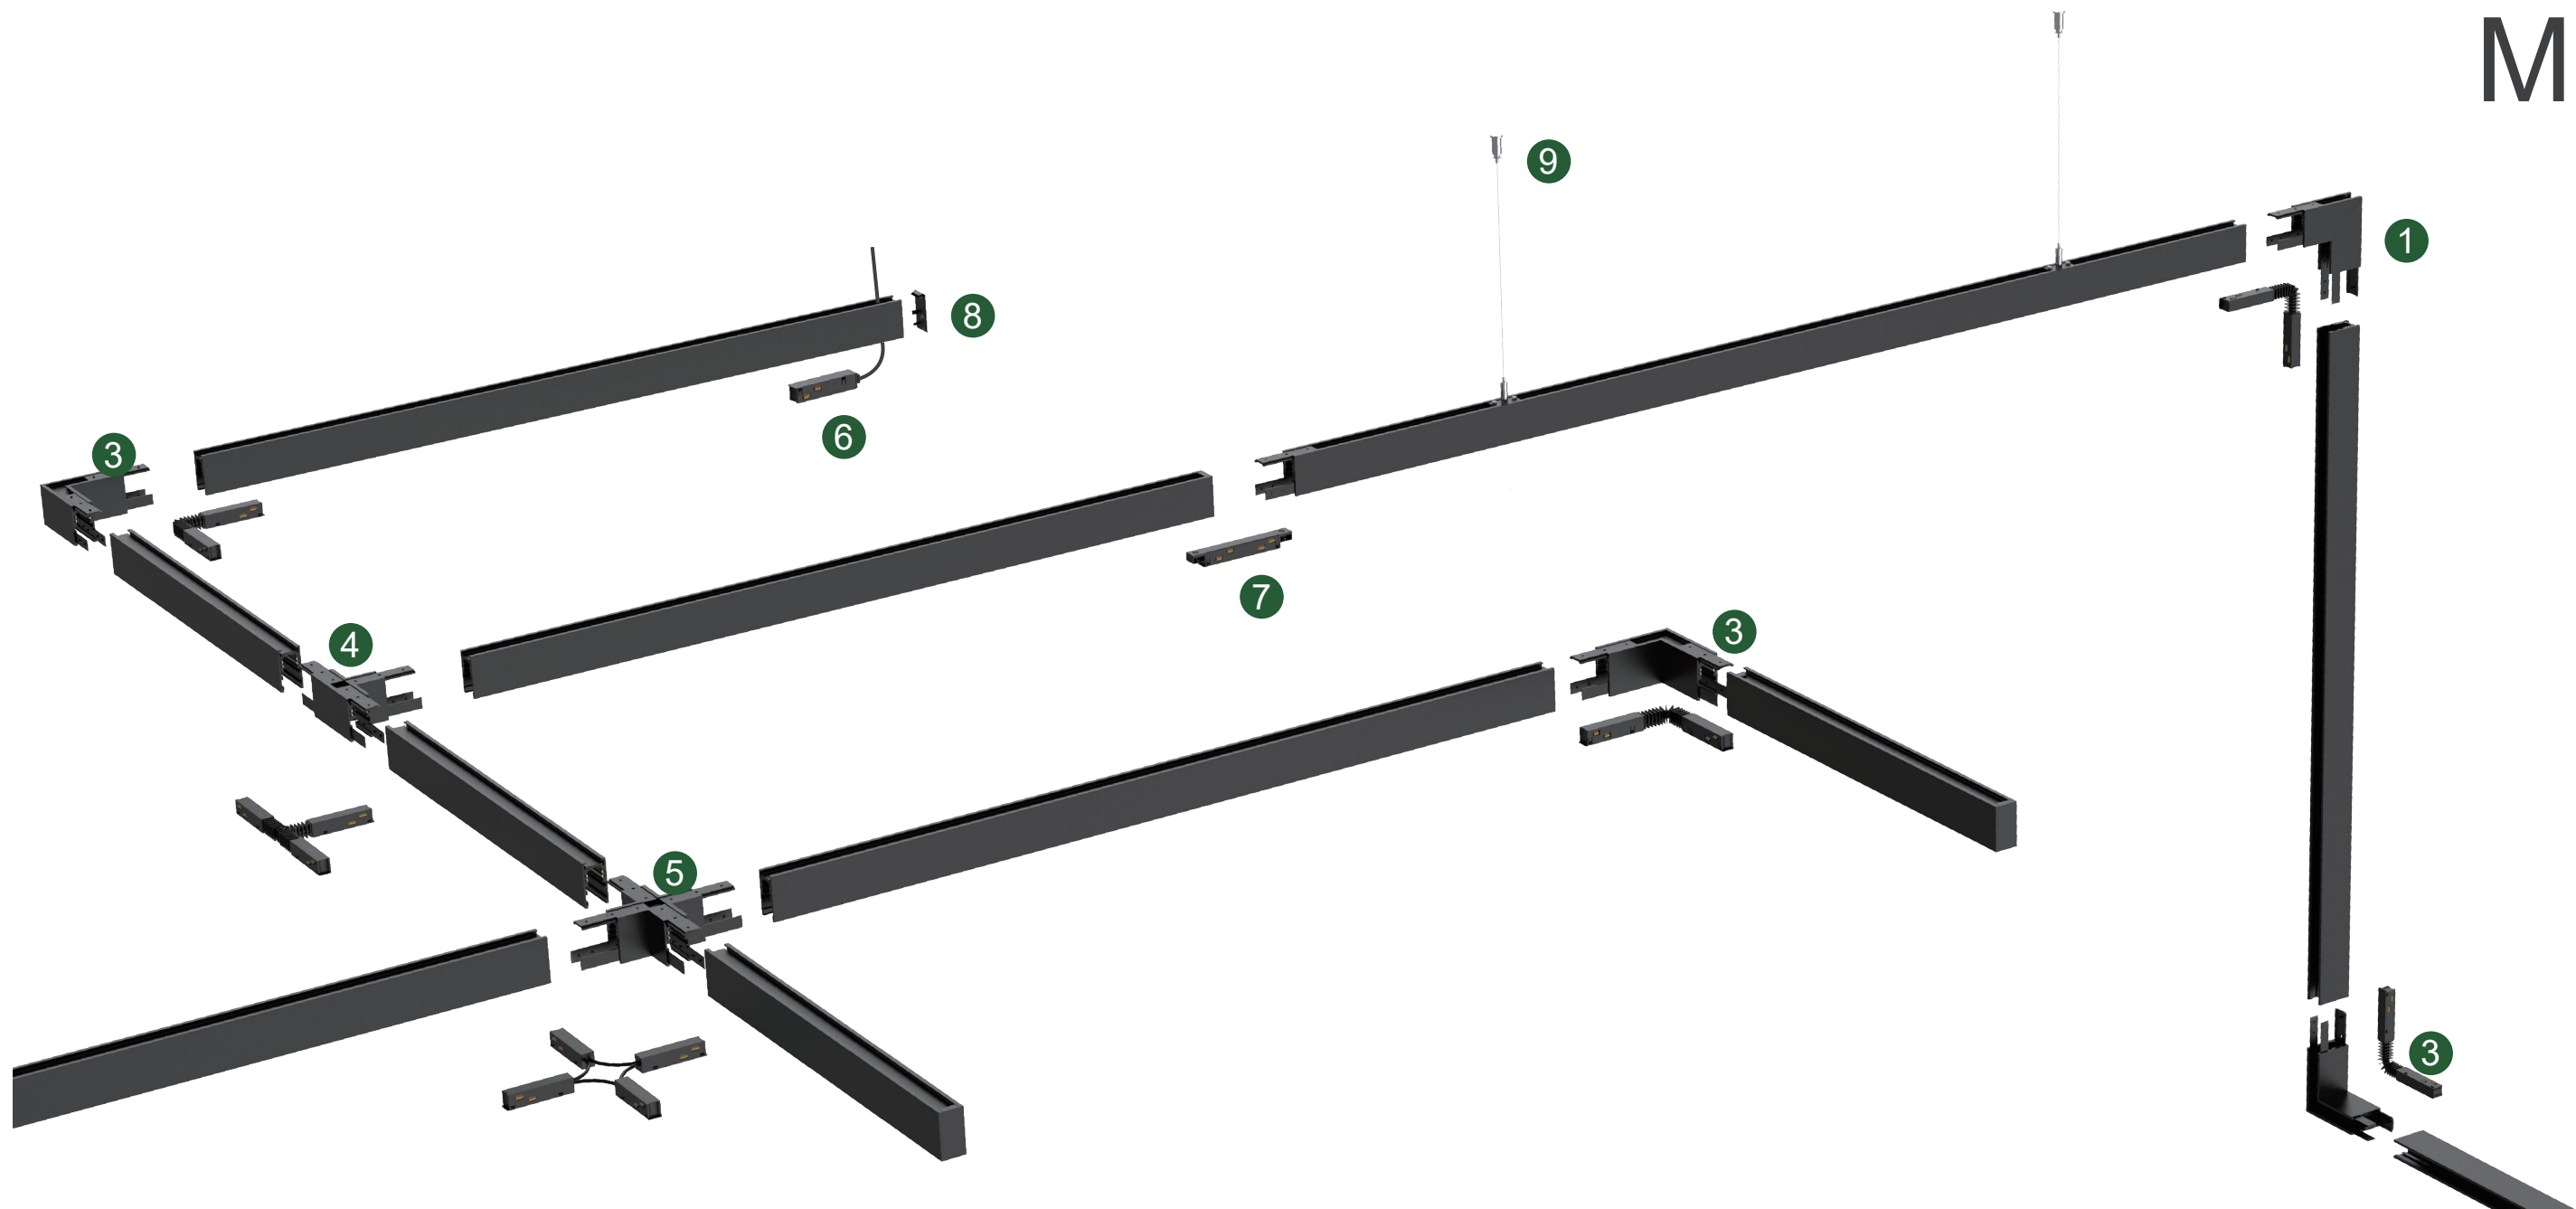

M19E

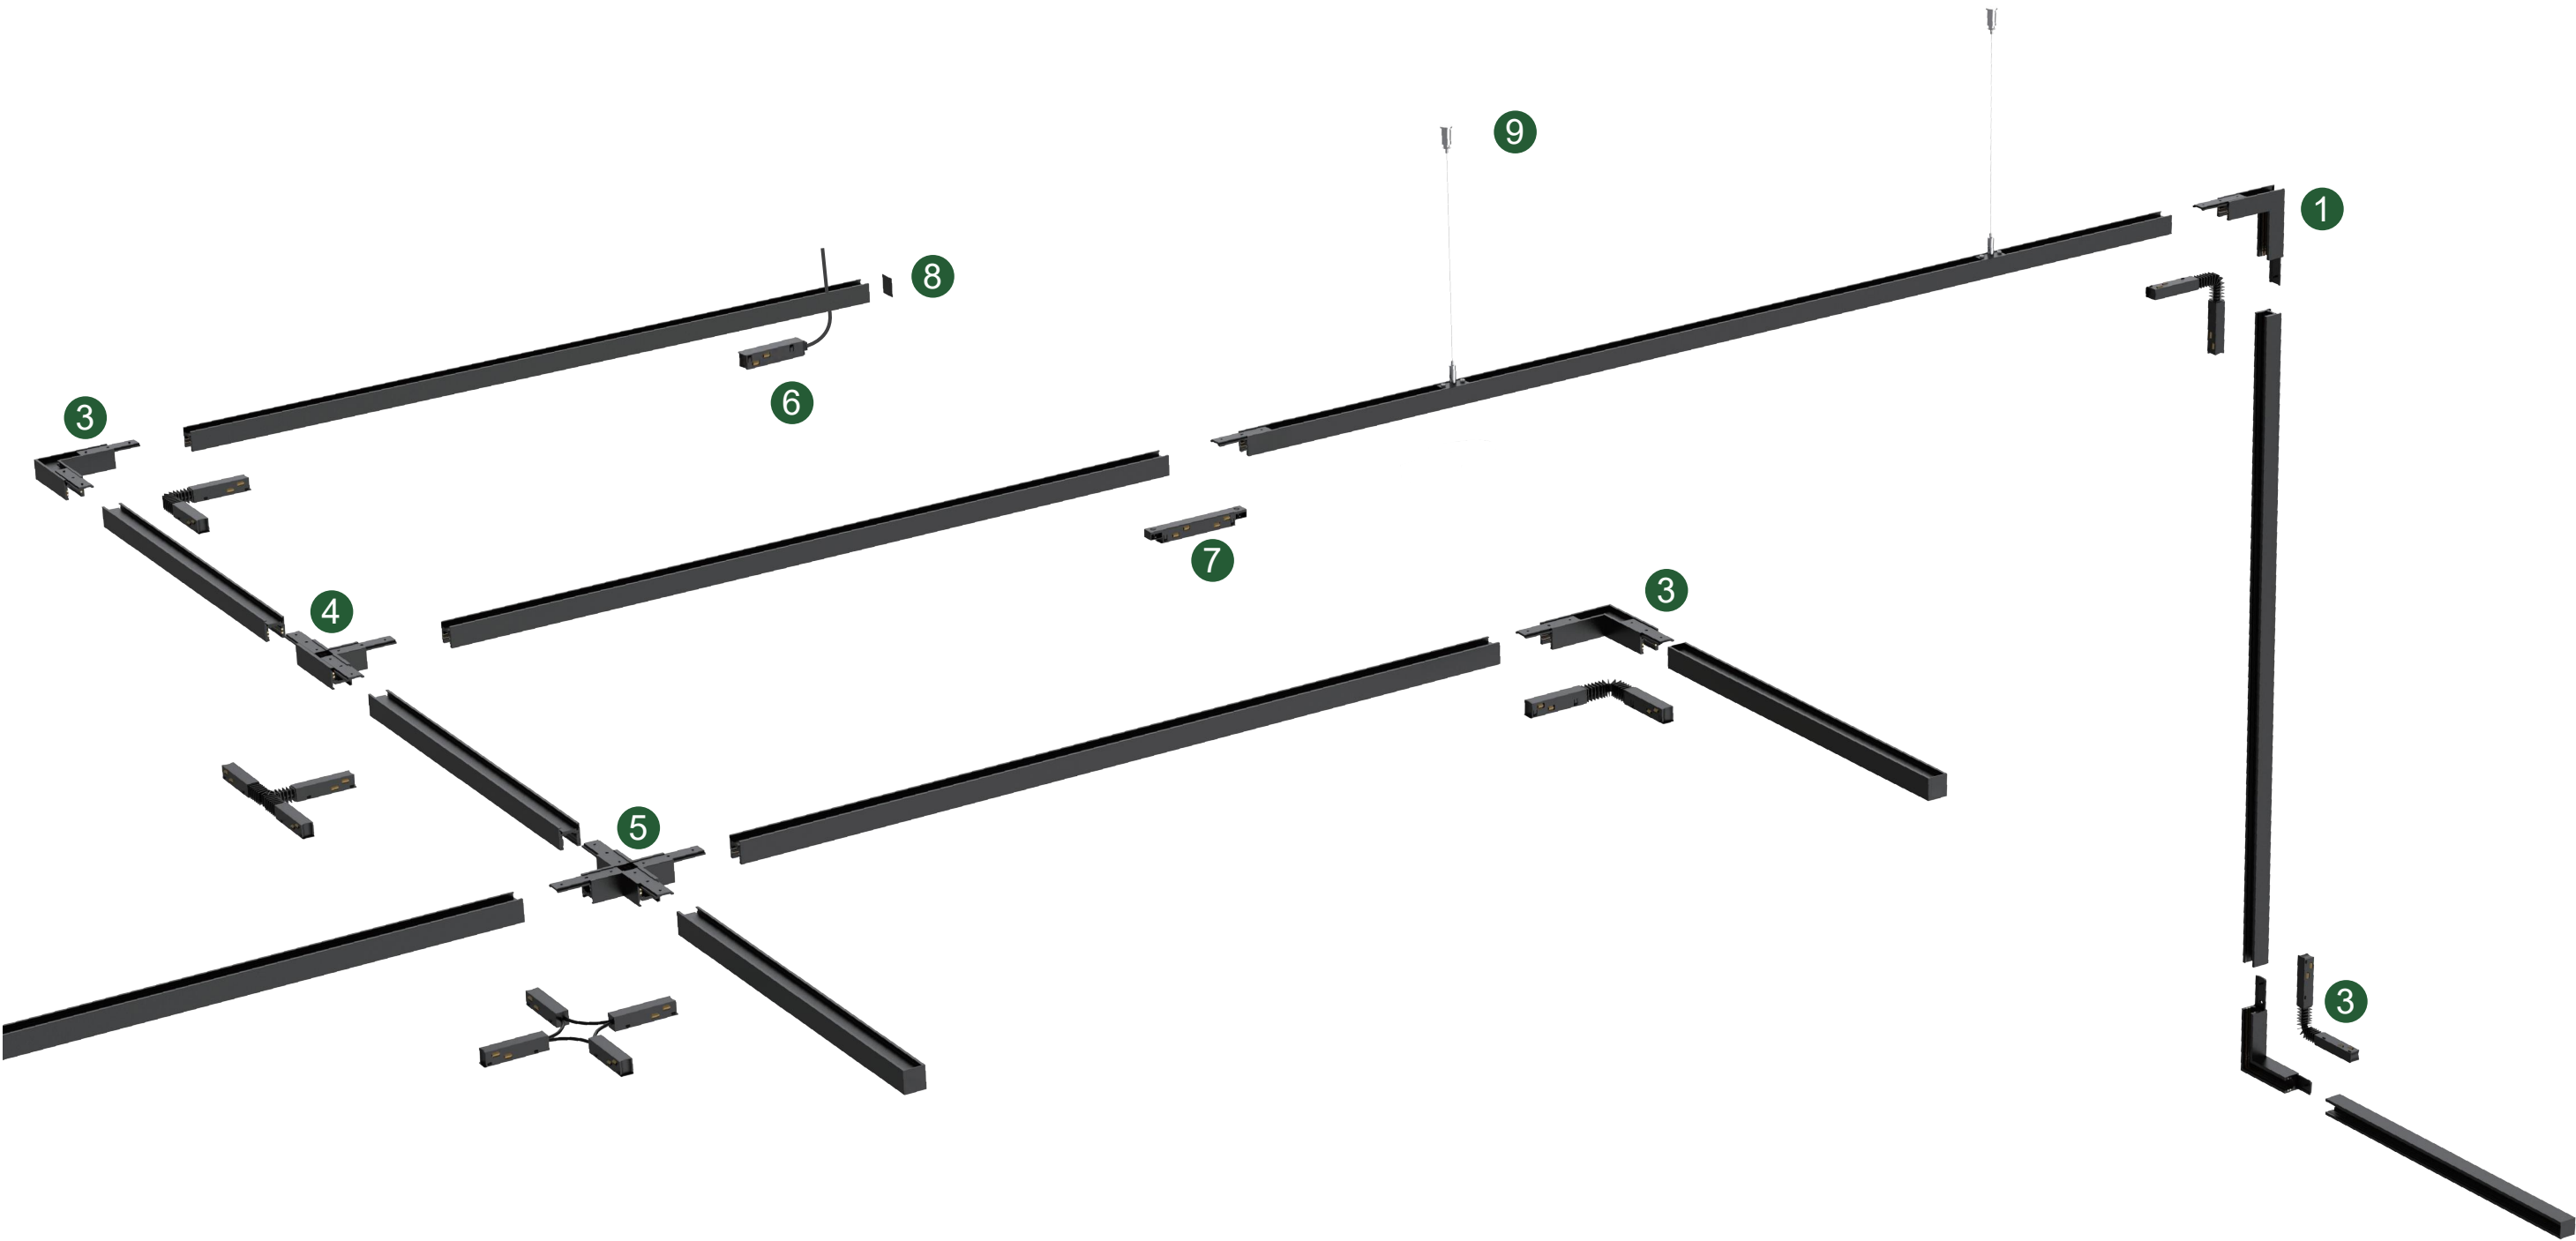

1

To be used with corner connectors

Surface Mounted/Hanging
(vertical 90° internal corner + corner connector)

Model: M19E-VNFLEX Size: L80*W80*H27mm

2

To be used with corner connectors

Surface Mounted/Hanging
(flat 90° corner + corner connector)

Model: M19E-SPFLEX Size: L80*W80*H27mm

3

Surface Mounted/Hanging
("T" Type corner)

Model: M19E-TZFLEX Size: L132*W80*H27mm

4

Surface Mounted/Hanging
("+" Type corner)

Model: M19E-SZFLEX Size: L132*W132*H27mm

5

External power connector

Model: M19-POWER Color: White/Black

6

Straight Connector

Model: M19-NOFLEX Color: White/Black

7

End Caps (M19E)


A pair, Black/White

8

Pendant Kit (Metal)






Model: M19-DPJ A Pair, 1.5m rope, Black/White

M19A



1.5M/2M
M19A
Embedded

M19A Trimless Recessed Track



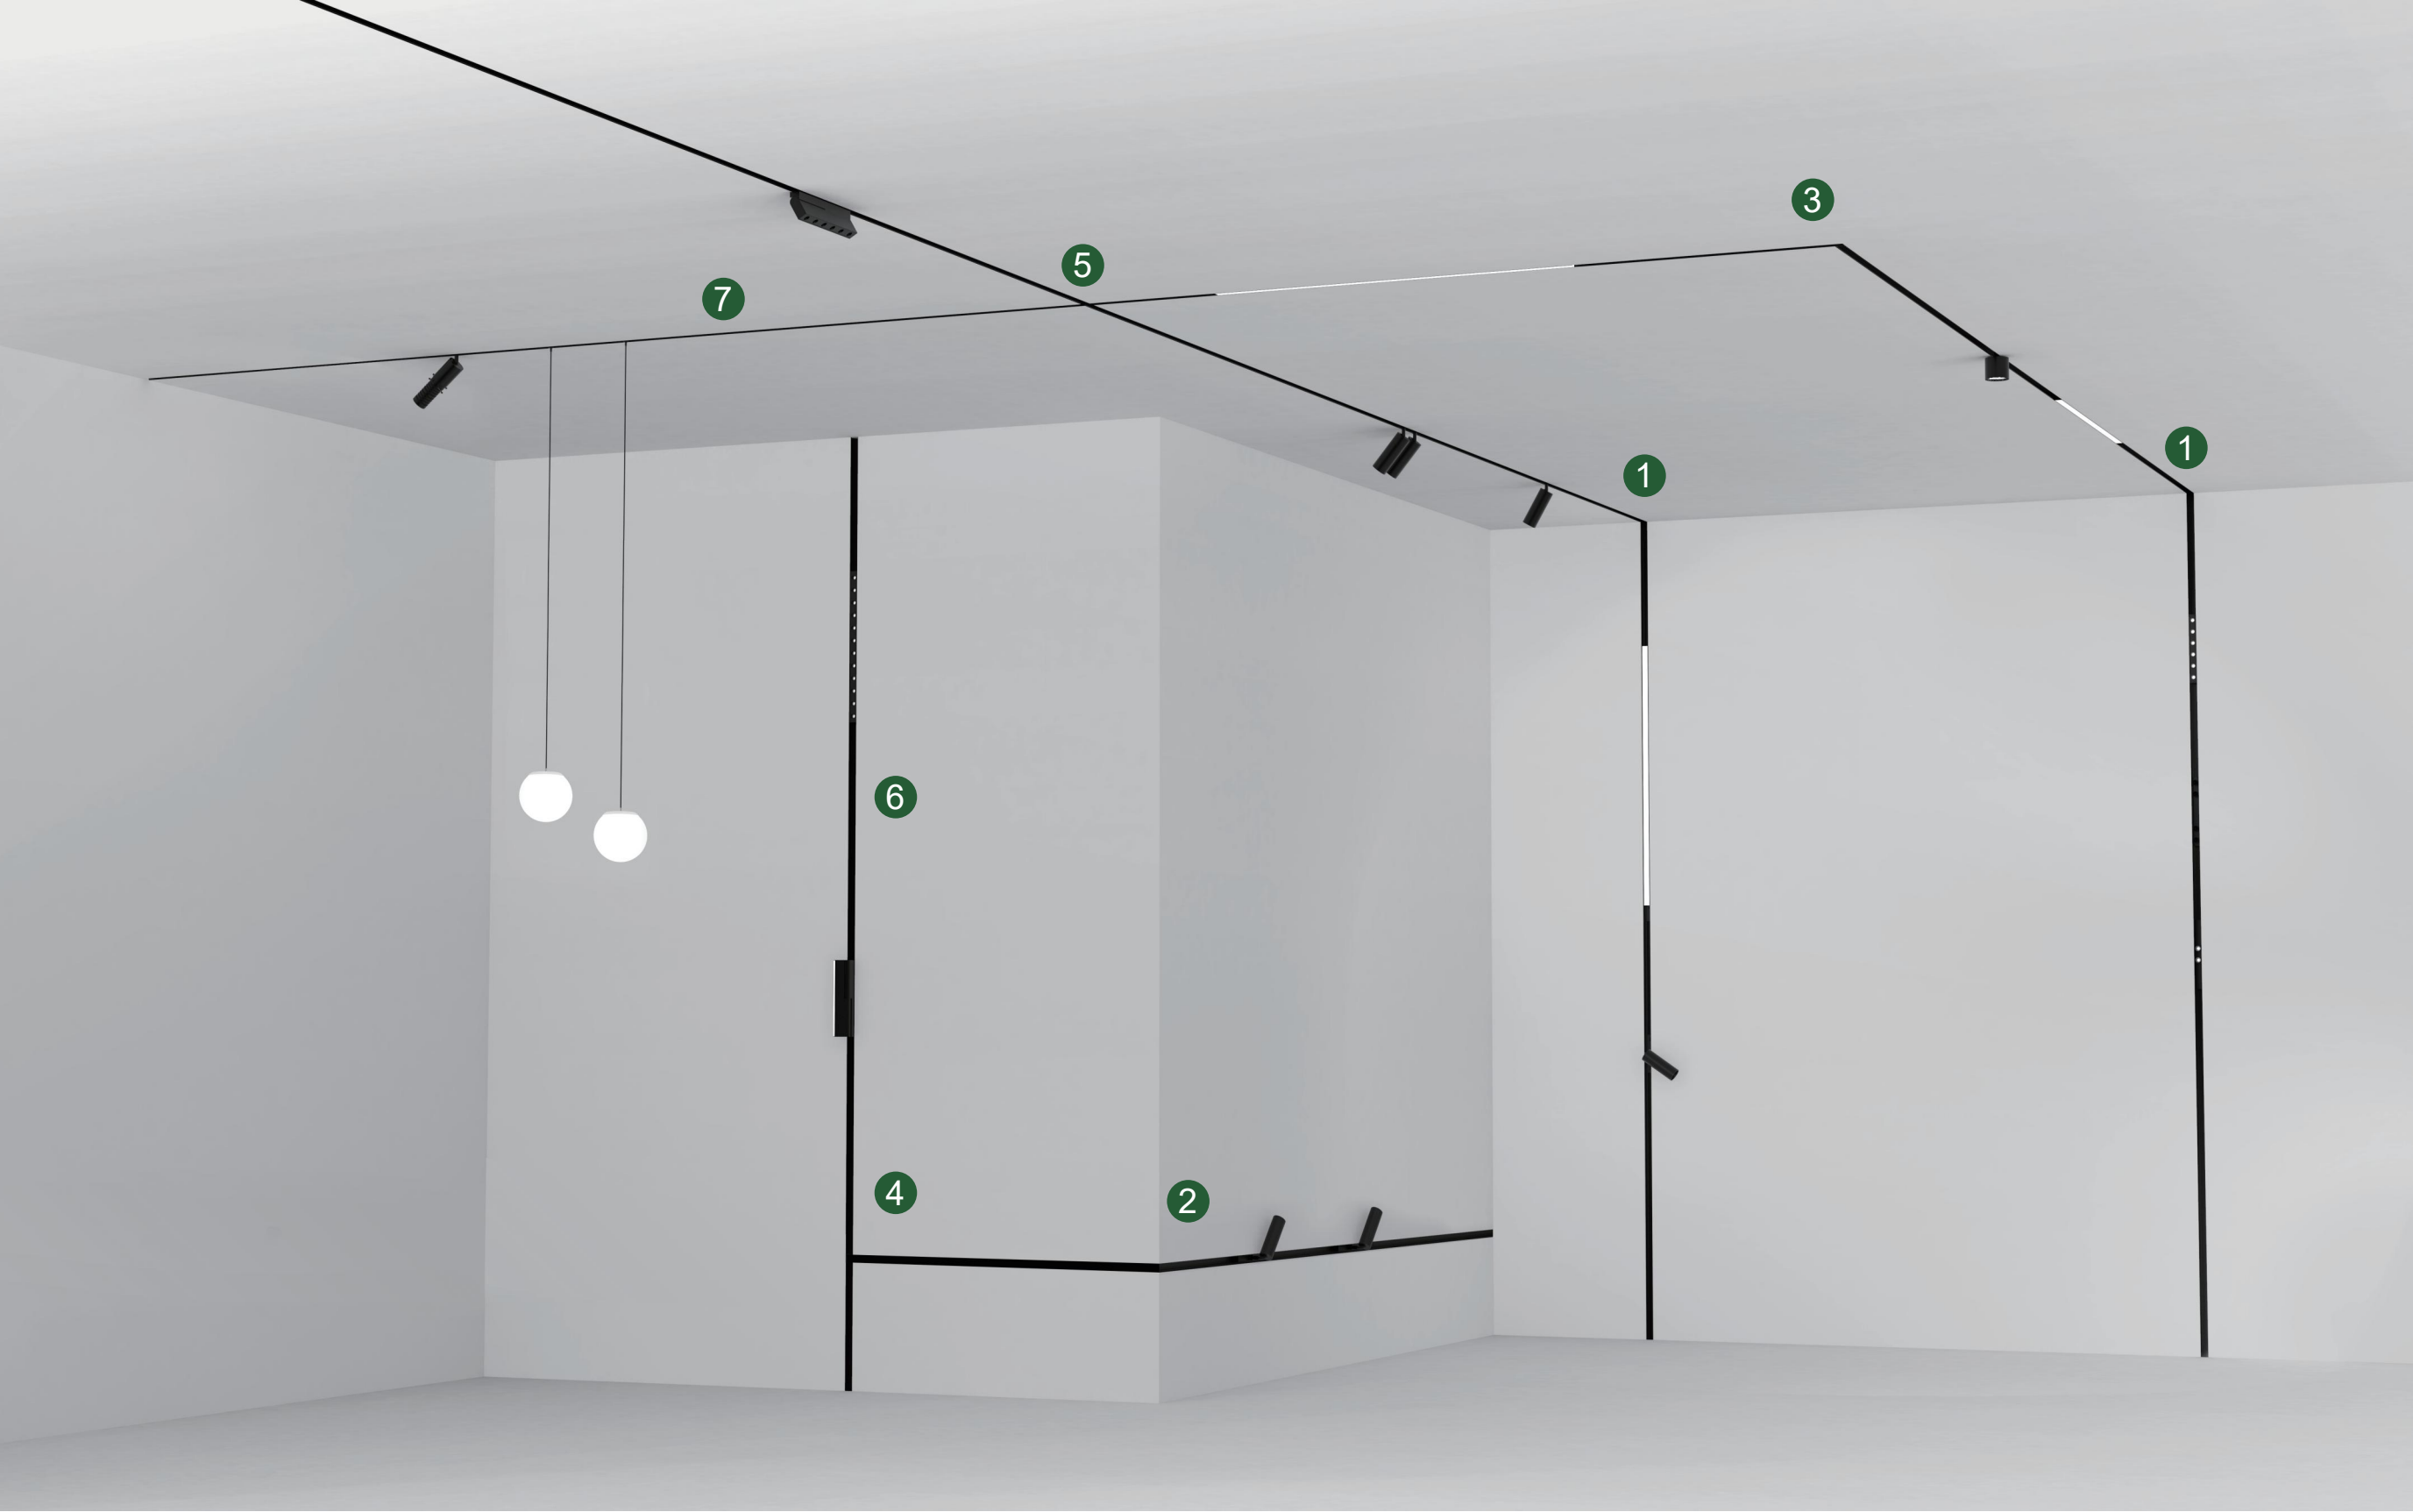
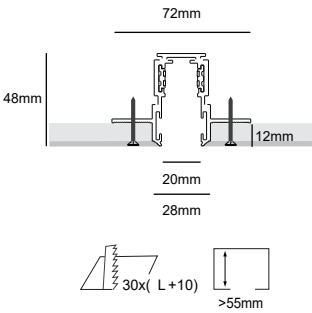


M19T



1.5M/2M
M19T
Embedded

M19T Trimless Recessed Track

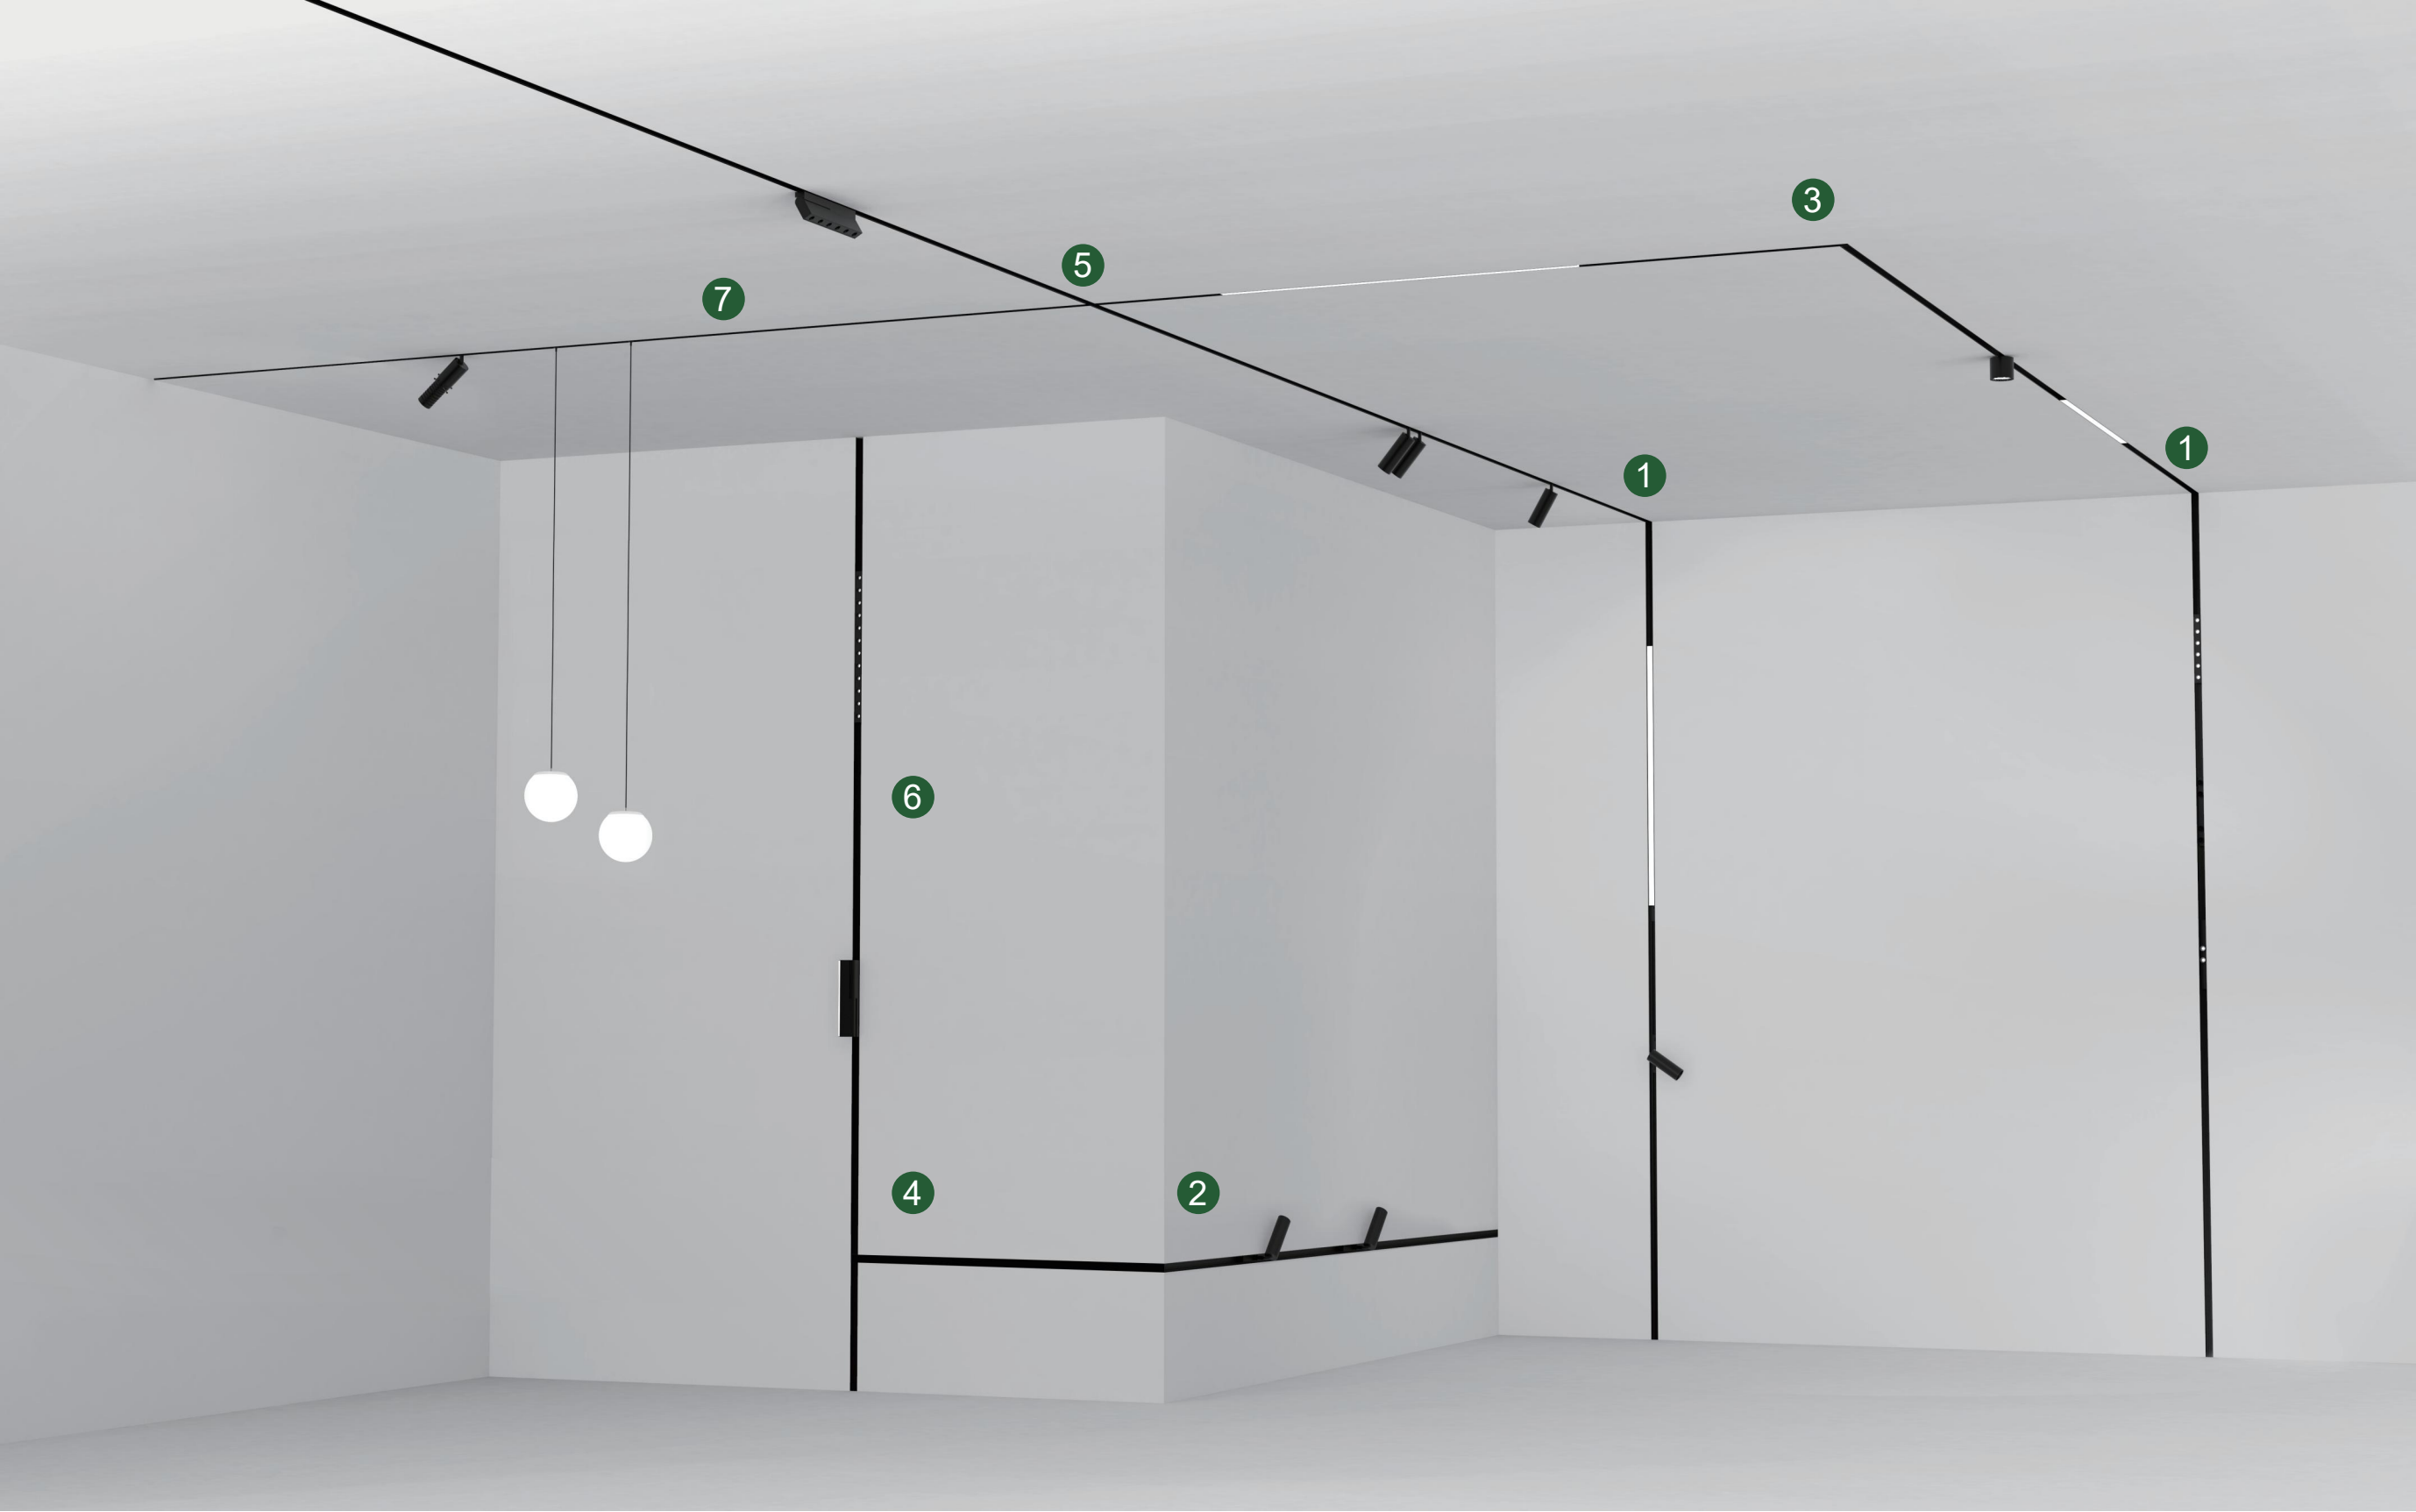

Magnetic Track System
M19




M19 SP30



Quick Info.


- System: 6W, CRI>97
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 25°, 35°
- Divd. Lumen: Up to 434lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution

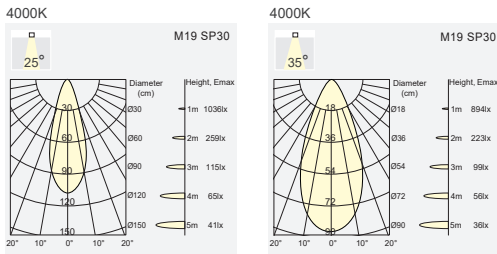

Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	6W	25°	97Ra	2700K	404.0 lm
				3000K	416.0 lm
				4000K	434.0 lm
48Vdc	6W	35°	97Ra	2700K	374.0 lm
				3000K	386.0 lm
				4000K	404.0 lm

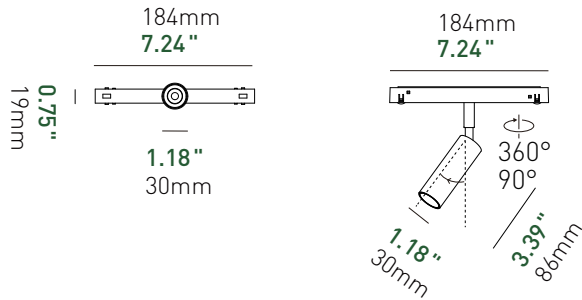


Finish



Optional accessory



Honeycomb

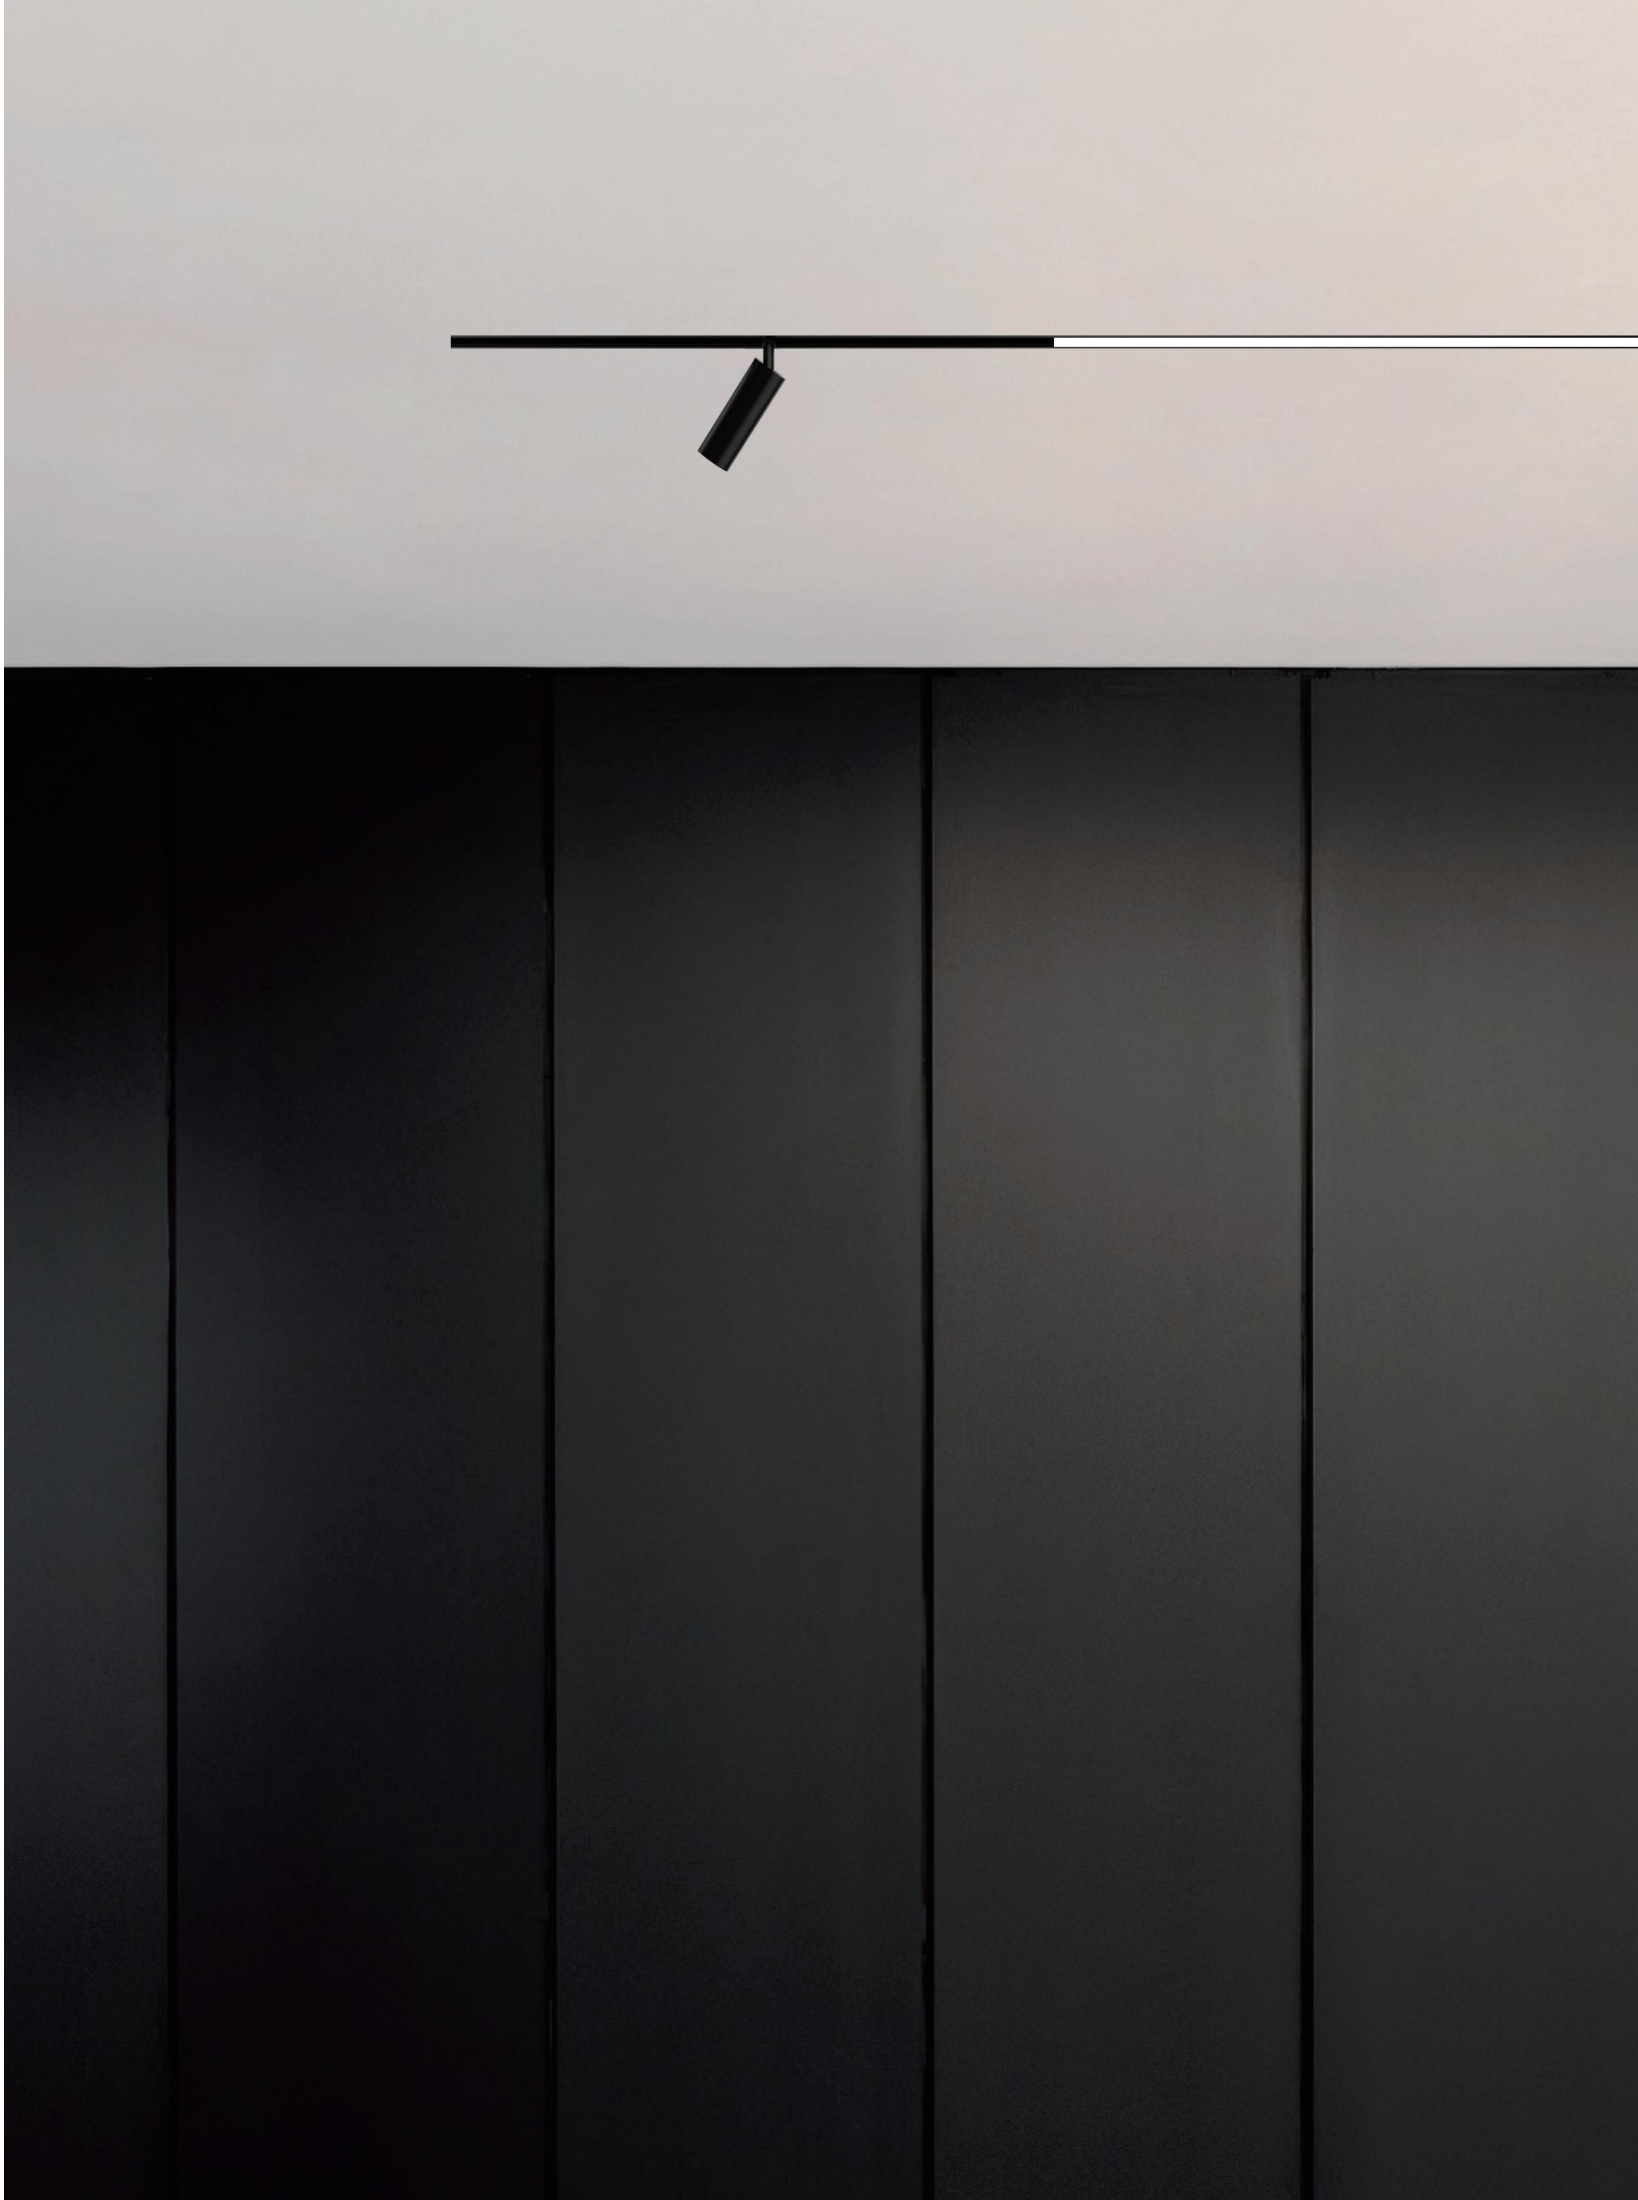


M19 SP40



Quick Info.

- System: 10W, CRI>97
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 25°, 35°
- Dlvd. Lumen: Up to 757lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution

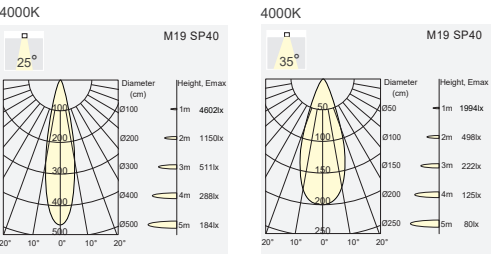

Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	10W	25°	97Ra	2700K	635.0 lm
				3000K	666.0 lm
				4000K	730.0 lm
48Vdc	10W	35°	97Ra	2700K	679.0 lm
				3000K	710.0 lm
				4000K	757.0 lm

Finish



Optional accessory



Honeycomb


M19 SP42



Quick Info.

- System: 10W*2, CRI>97
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 25°, 35°
- Dlvd. Lumen: Up to 1548lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution

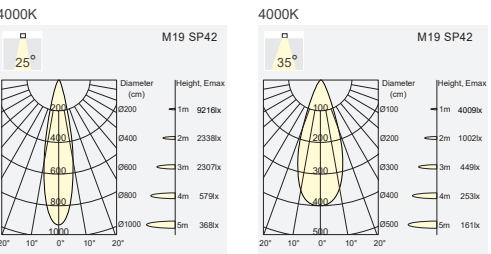

Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	10W*2	25°	97Ra	2700K	1269.0 lm
				3000K	1333.0 lm
				4000K	1460.0 lm
48Vdc	10W*2	35°	97Ra	2700K	1357.0 lm
				3000K	1421.0 lm
				4000K	1548.0 lm

Finish



Optional accessory



Honeycomb


M19 SP55



Quick Info.

- System: 15W, CRI>90
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 25°, 35°,50°
- Divd. Lumen: Up to 1521lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution

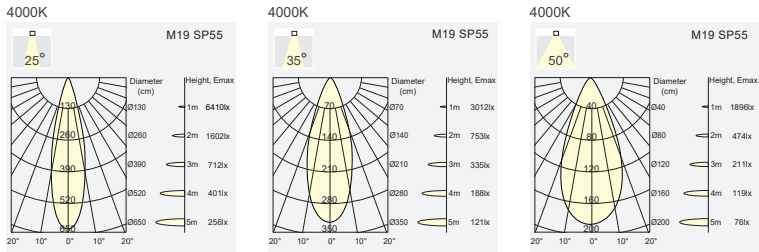


Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	15W	25°	90Ra	2700K	1282.0 lm
				3000K	1327.0 lm
				4000K	1418.0 lm
48Vdc	15W	35°	90Ra	2700K	1389.0 lm
				3000K	1433.0 lm
				4000K	1521.0 lm
48Vdc	15W	50°	90Ra	2700K	1210.0 lm
				3000K	1254.0 lm
				4000K	1342.0 lm


Finish



Optional accessory




Honeycomb

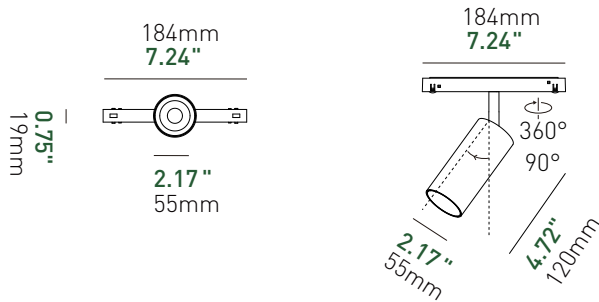

Quick Info.

- System: 15W*2, CRI>90
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 25°, 35°,50°
- Divd. Lumen: Up to 3042lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution

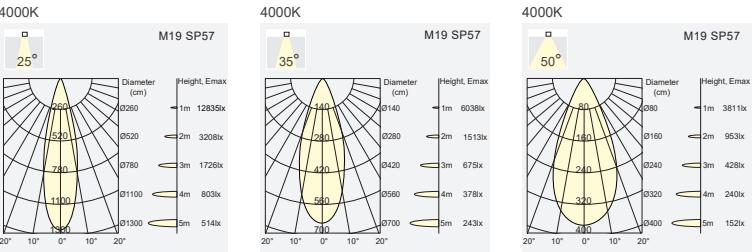


Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	15W*2	25°	90Ra	2700K	2383.0 lm
				3000K	2655.0 lm
				4000K	2836.0 lm
48Vdc	15W*2	35°	90Ra	2700K	2777.0 lm
				3000K	2866.0 lm
				4000K	3042.0 lm
48Vdc	15W*2	50°	90Ra	2700K	2419.0 lm
				3000K	2508.0 lm
				4000K	2684.0 lm


Finish



Optional accessory



Honeycomb

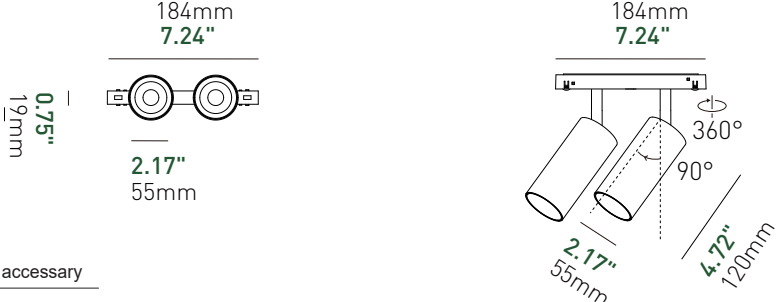


M19 SP65



Quick Info.

- System: 20W, CRI>90
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 25°, 35°, 50°
- Dlvd. Lumen: Up to 2752lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution

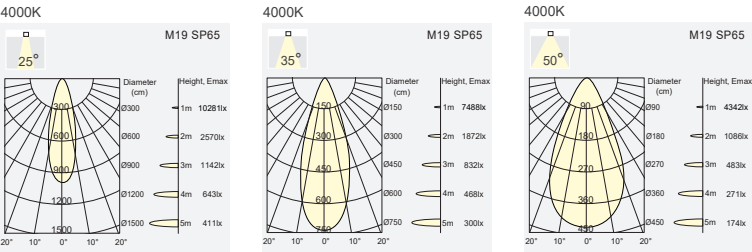

Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	20W	25°	90Ra	2700K	2446.0 lm
				3000K	2511.0 lm
				4000K	2642.0 lm
48Vdc	20W	35°	90Ra	2700K	2555.0 lm
				3000K	2621.0 lm
				4000K	2752.0 lm
48Vdc	20W	50°	90Ra	2700K	2401.0 lm
				3000K	2467.0 lm
				4000K	2598.0 lm


Finish



Optional accessory



Honeycomb

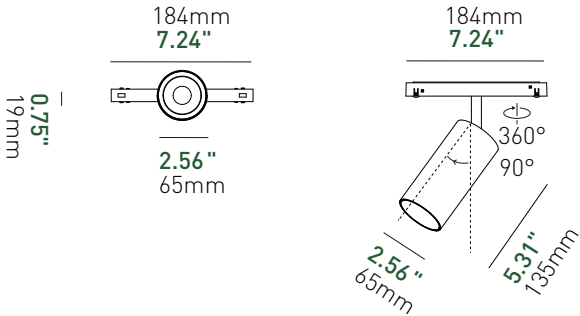


M19 XP55



Quick Info.

- System: 8W, CRI>97
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 25°, 35°
- Dlvd. Lumen: Up to 577lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI


Light Distribution

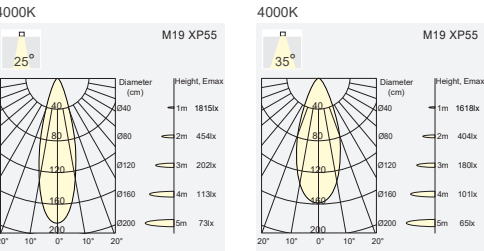


Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	8W	25°	97Ra	2700K	452.0 lm
				3000K	477.0 lm
				4000K	529.0 lm
48Vdc	8W	35°	97Ra	2700K	499.0 lm
				3000K	525.0 lm
				4000K	577.0 lm

Finish

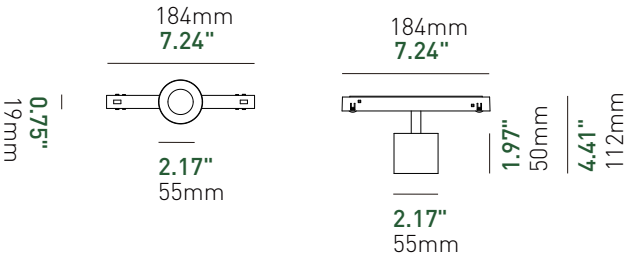

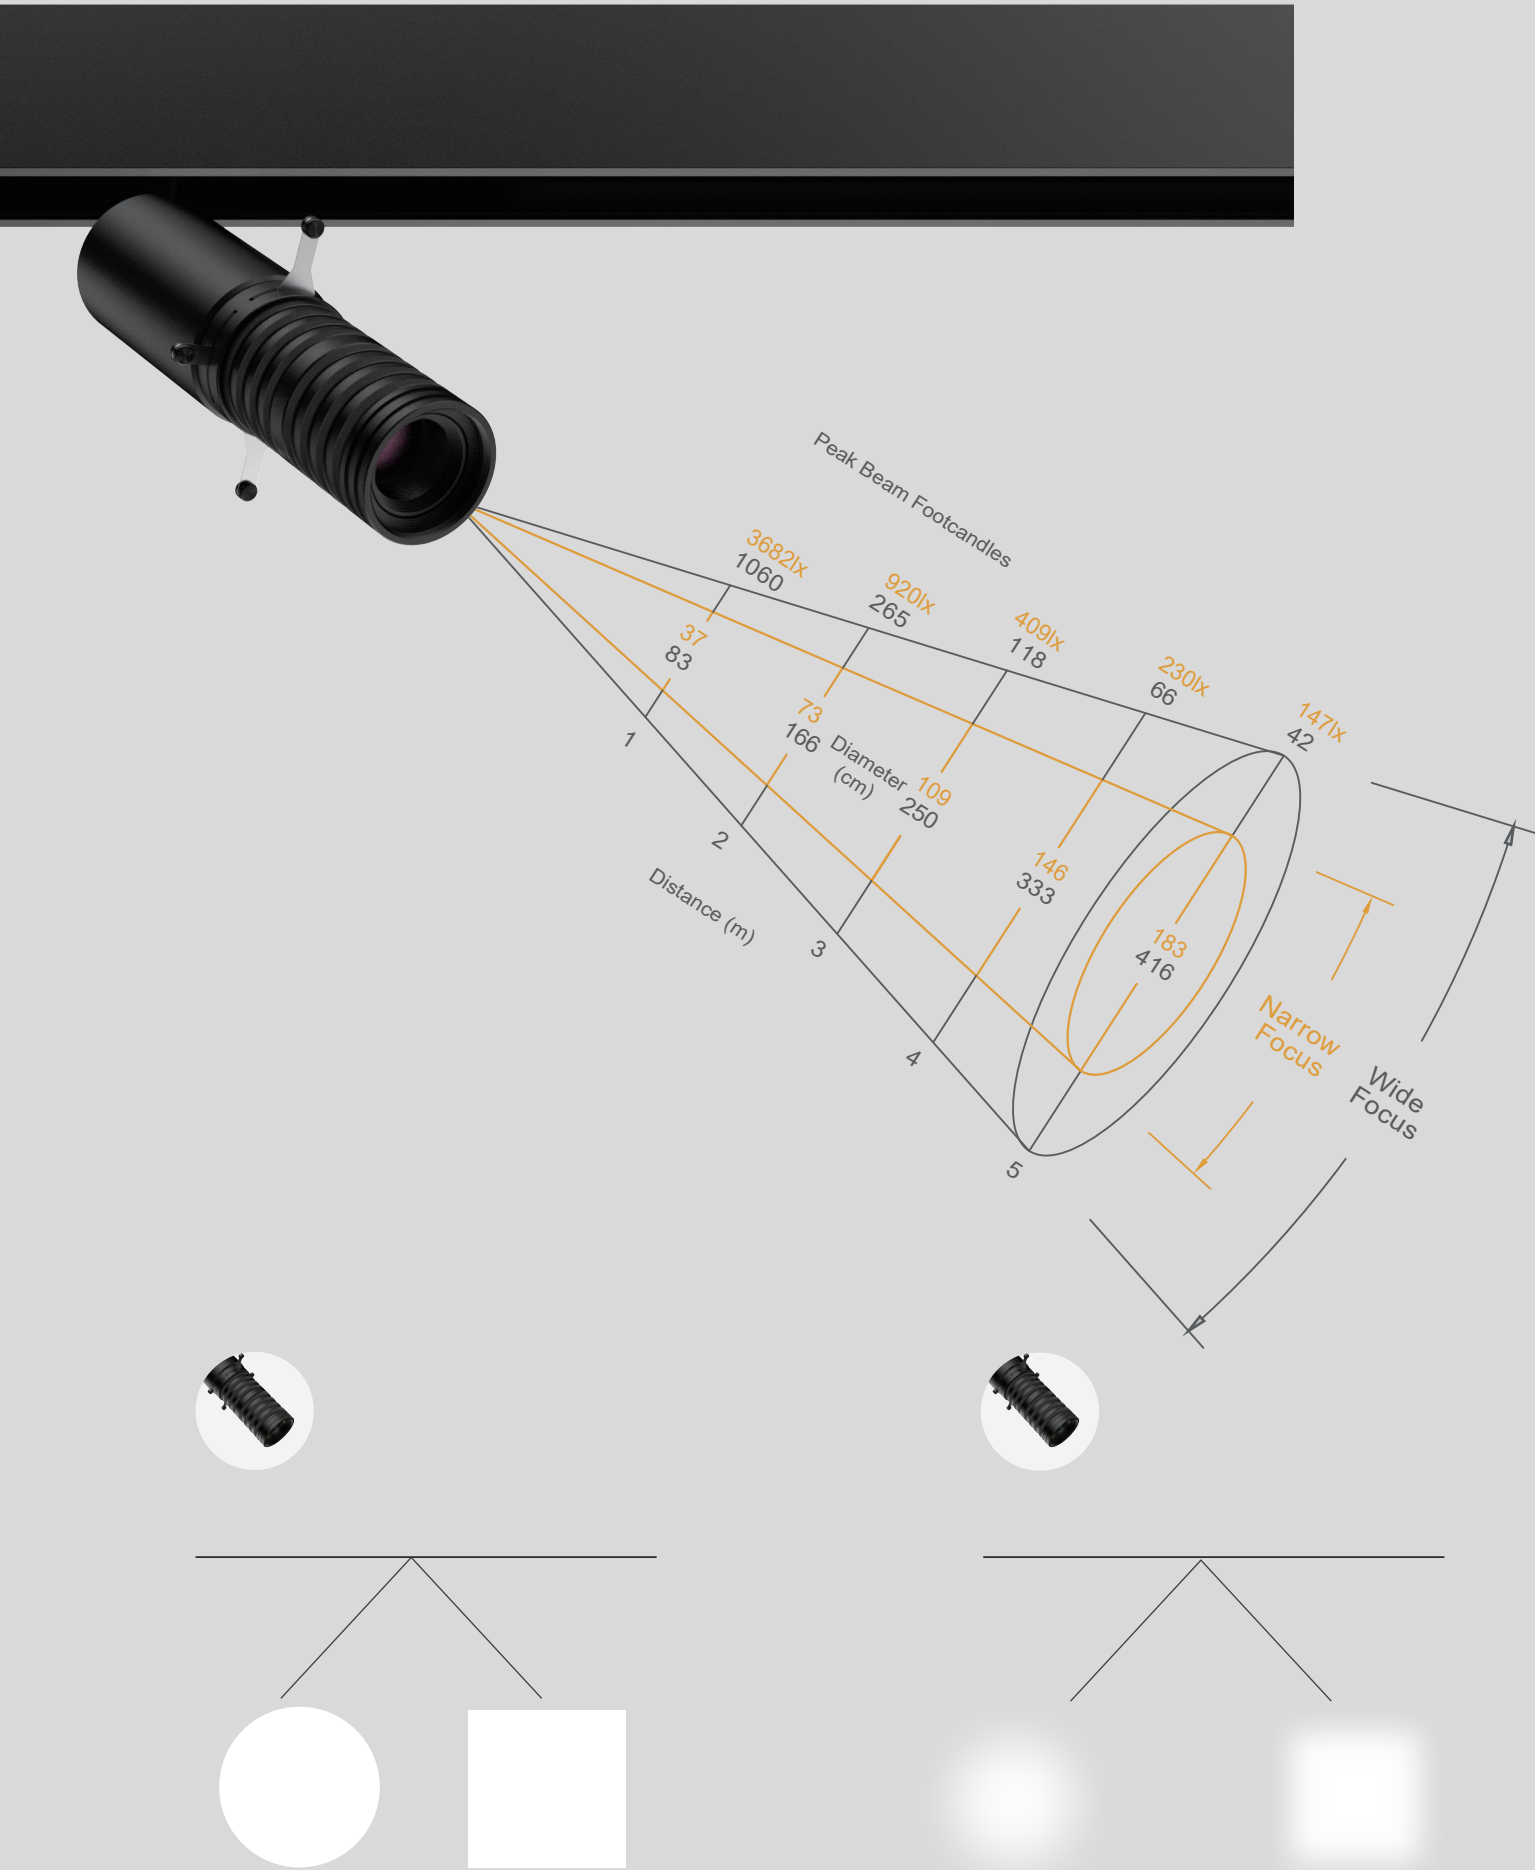


M19 SP36




- Quick Info.
- System: 8W, CRI>97
 - CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
 - Beam Angle: 25°-45°
 - Dlvd. Lumen: Up to 619lm
 - IP Class: IP20
 - DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution



Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	8W	25°-45°	97Ra	2700K	543 lm
				3000K	568 lm
				4000K	619 lm

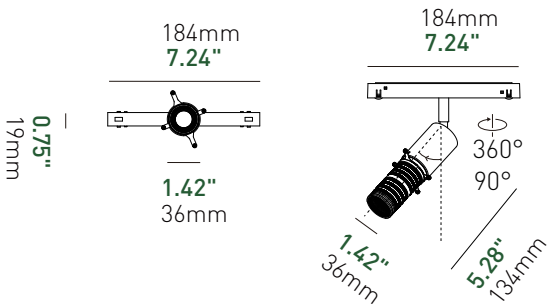

Finish





M19 GL20






Quick Info.


- System: 10W, CRI>95
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 30°
- Divd. Lumen: Up to 459lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution



Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	10W	30°	95Ra	2700K	355.0 lm
				3000K	389.0 lm
				4000K	459.0 lm

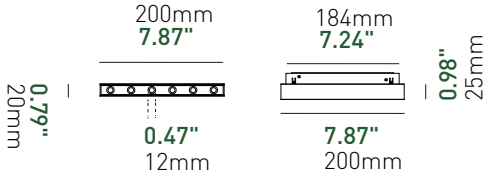

Finish



White



Black


M19 GL40



Quick Info.


- System: 20W, CRI>95
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 30°
- Dlvd. Lumen: Up to 918lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution



Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	20W	30°	95Ra	2700K	709.0 lm
				3000K	779.0 lm
				4000K	918.0 lm

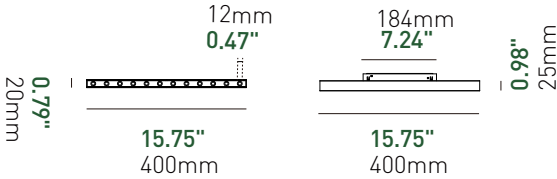

Finish



WhiteBlack


M19 GL80



Quick Info.


- System: 40W, CRI>95
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 30°
- Dlvd. Lumen: Up to 1836lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution



Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	40W	30°	95Ra	2700K	1418.0 lm
				3000K	1558.0 lm
				4000K	1836.0 lm

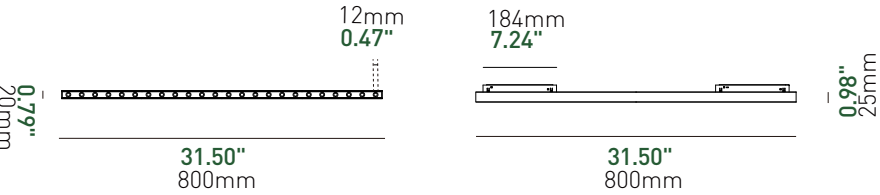

Finish



WhiteBlack




M19 GL02



Quick Info.

- System: 4W, CRI>95
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 30°
- Dlvd. Lumen: Up to 121lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution



Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	4W	30°	95Ra	2700K	83.0 lm
				3000K	95.0 lm
				4000K	121.0 lm

Finish




M19 GL04



Quick Info.

- System: 8W, CRI>95
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 30°
- Dlvd. Lumen: Up to 306lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution




Product Specifications


LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	8W	30°	95Ra	2700K	234.0 lm
				3000K	258.0 lm
				4000K	306.0 lm

Finish



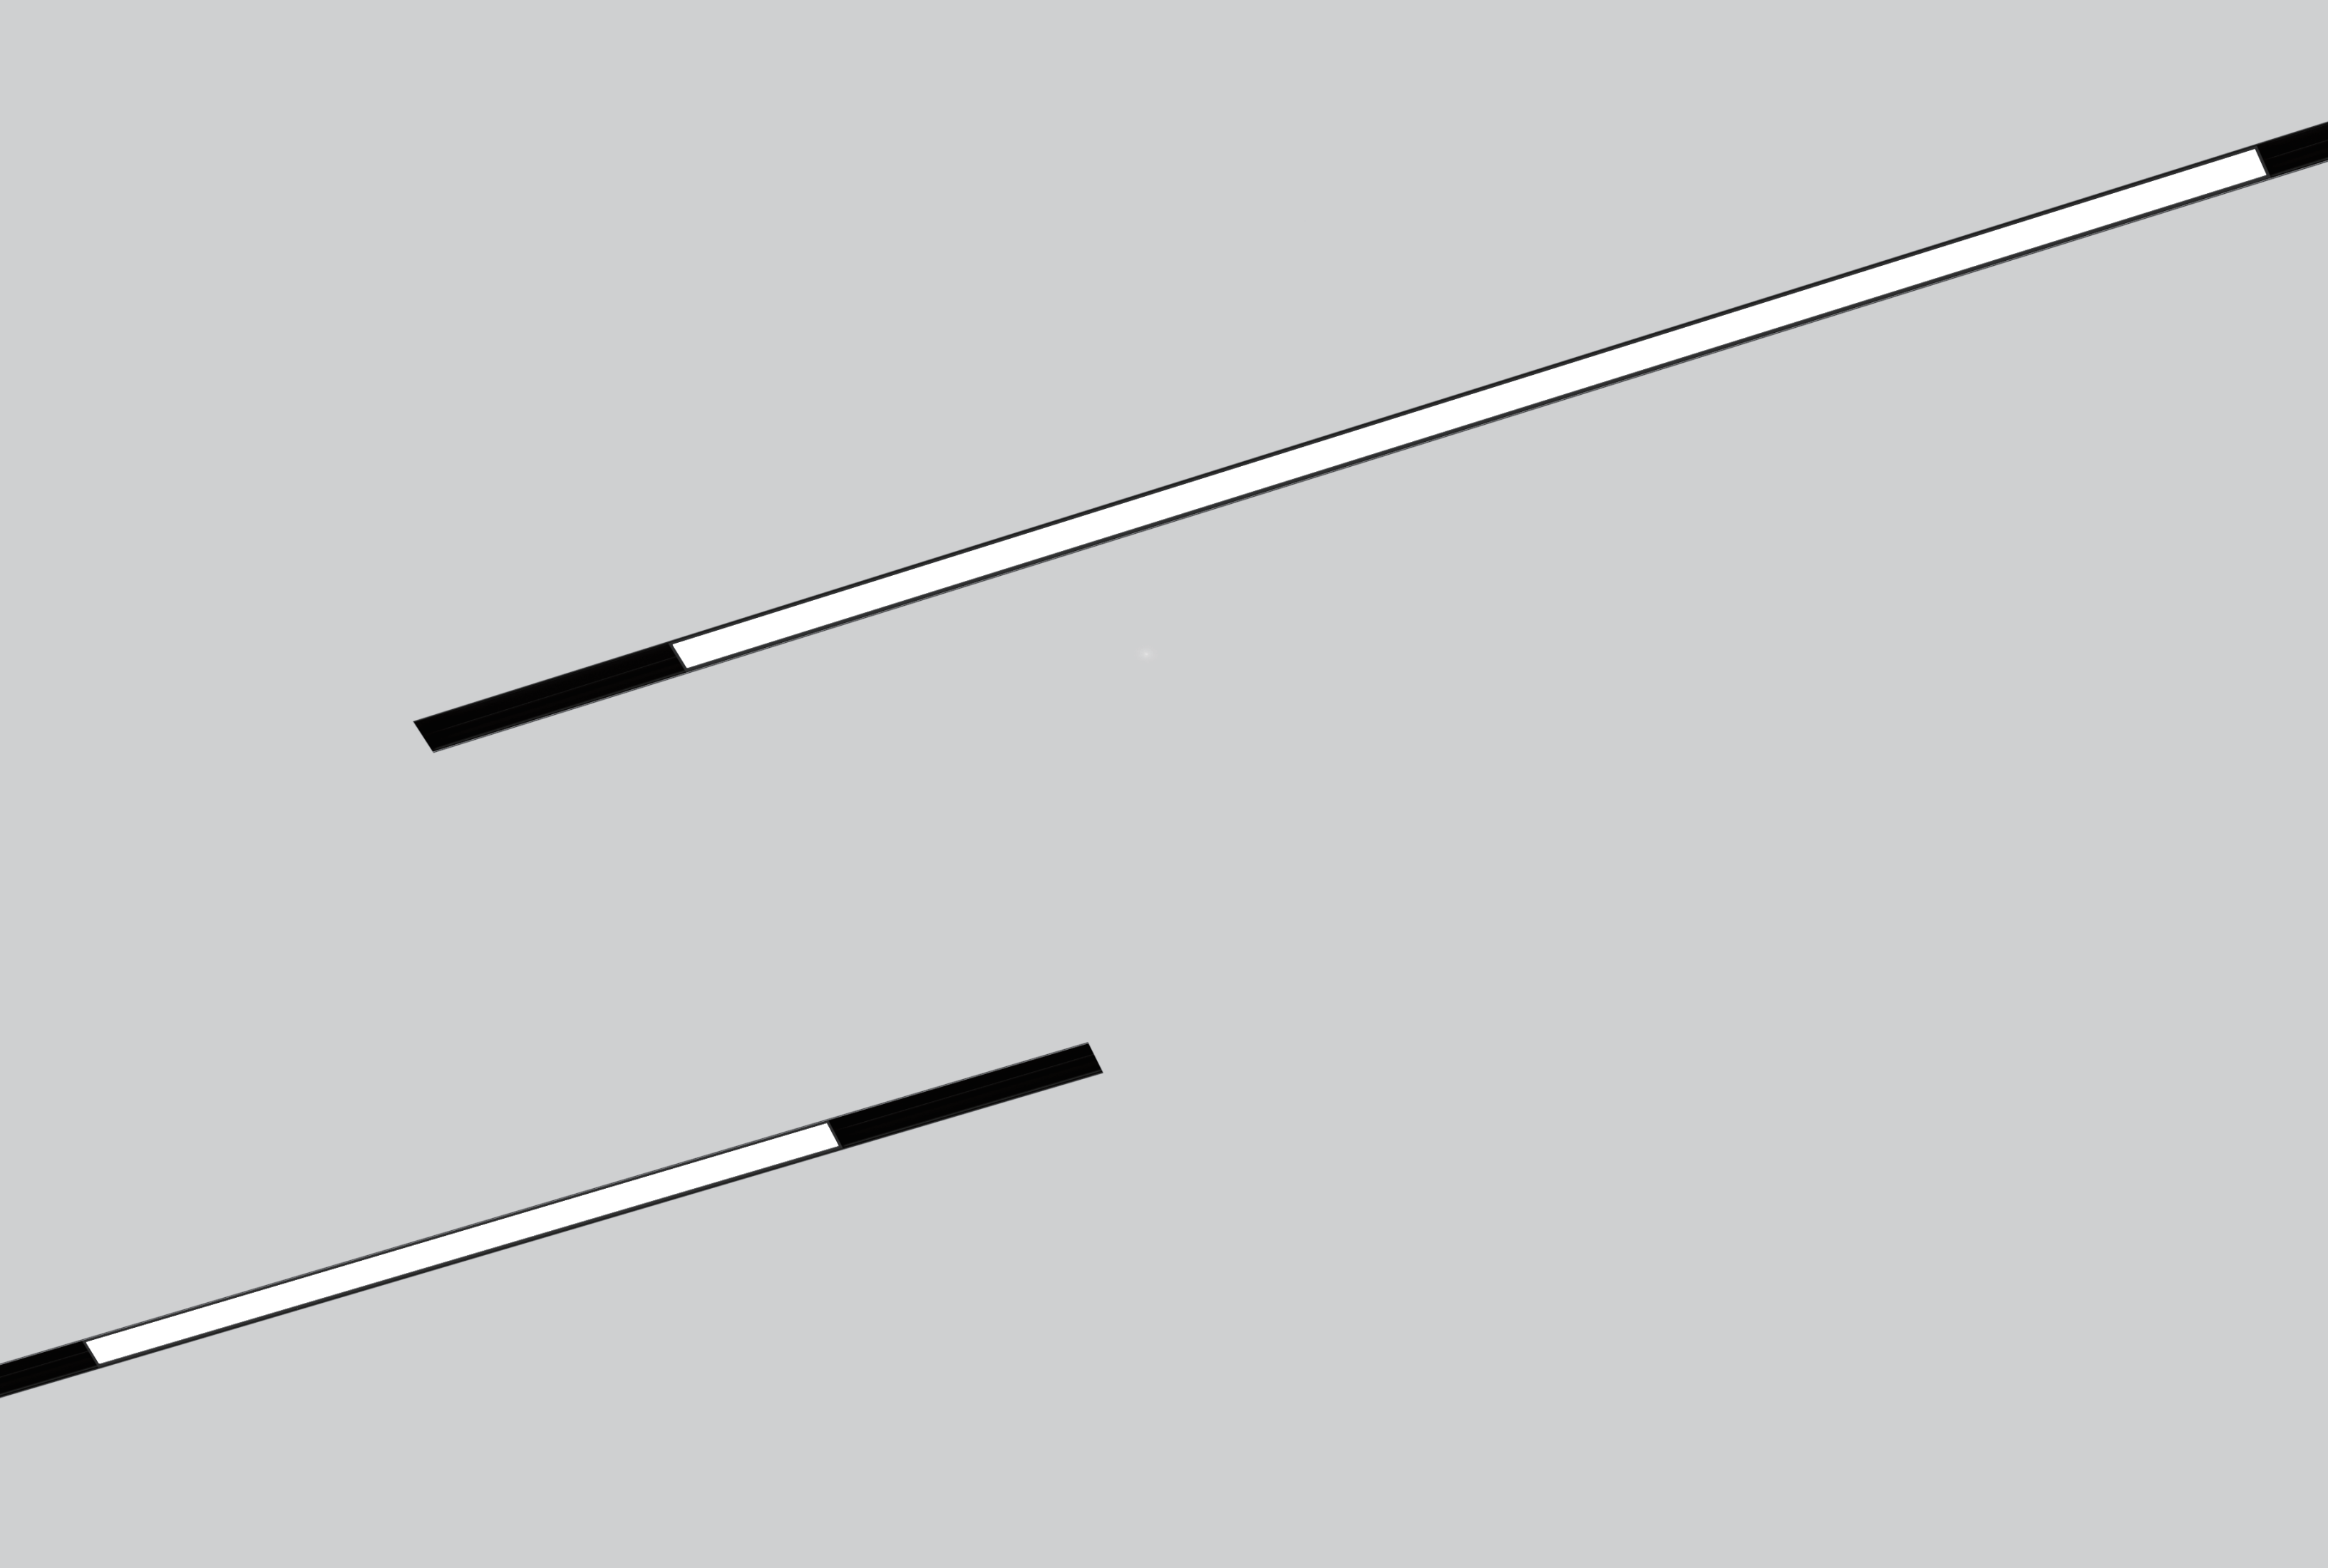


M19 FL40

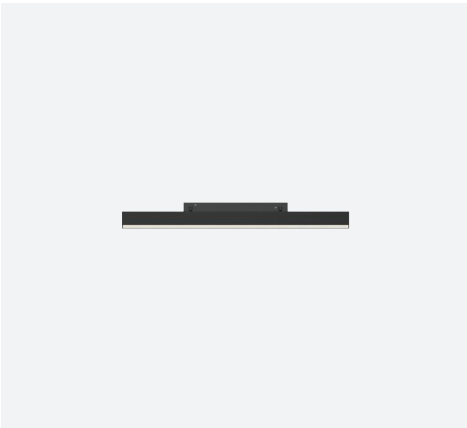

Quick Info.

- System: 15W, CRI>95
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 120°
- Dlvd. Lumen: Up to 662lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution




Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	15W	120°	95Ra	2400K	533.0 lm
				3000K	576.0 lm
				4000K	662.0 lm

Finish



WhiteBlack

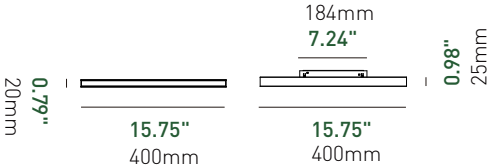


M19 FL80



Quick Info.

- System: 30W, CRI>95
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 120°
- Dlvd. Lumen: Up to 1410lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution




Product Specifications


LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	30W	120°	95Ra	2700K	1154.0 lm
				3000K	1239.0 lm
				4000K	1410.0 lm

Finish



WhiteBlack

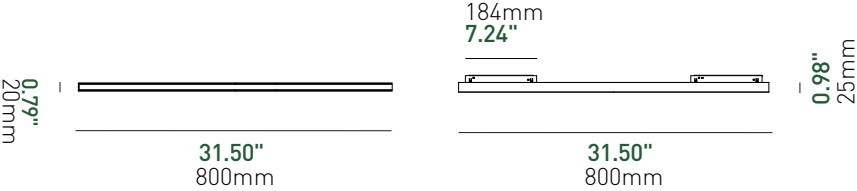

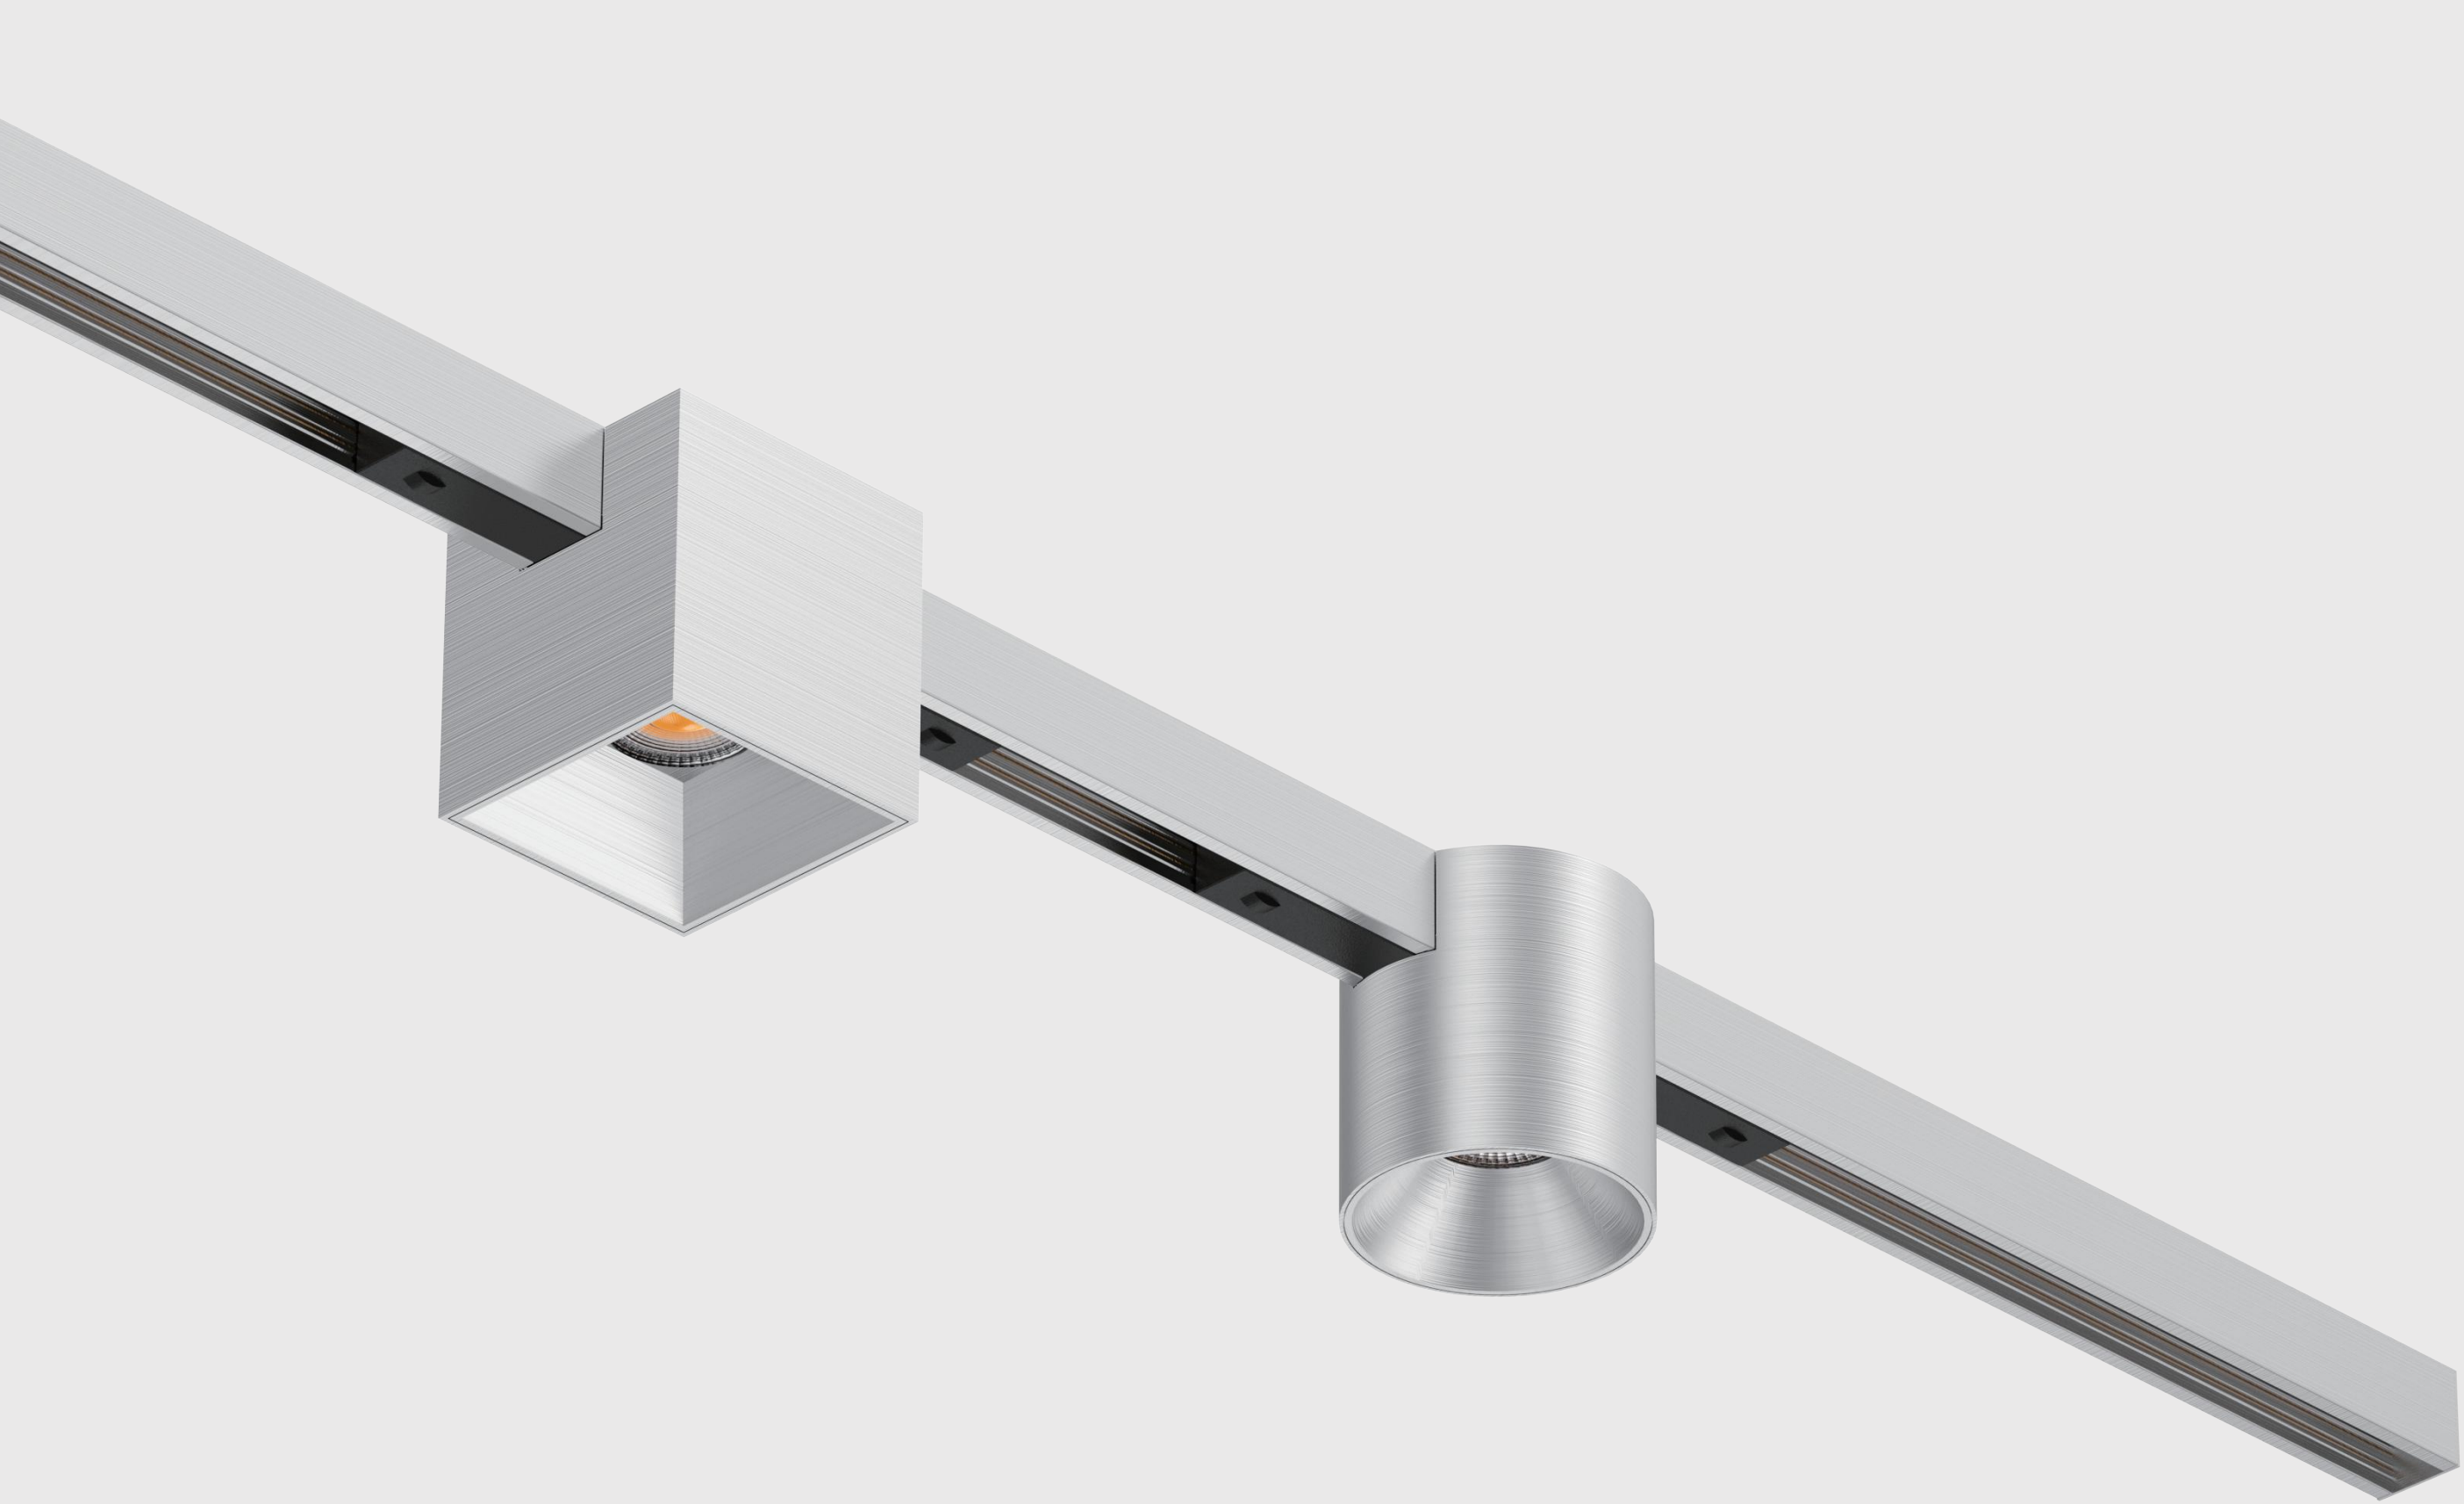

M19 XP74-ER80




Fit into M19E
(short surface-mounted) rail only



Quick Info.


- System: 8W, CRI>97
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 25°, 35°, 50°
- Divd. Lumen: Up to 619lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution

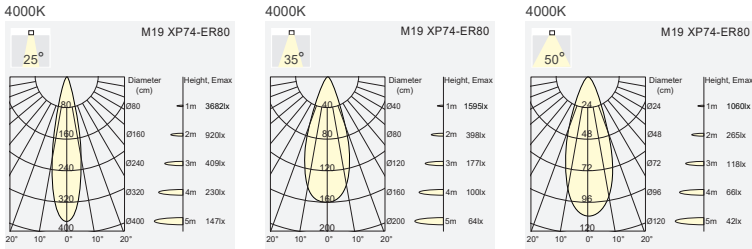

Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	8W	25°	97Ra	2700K	508.0 lm
				3000K	533.0 lm
				4000K	584.0 lm
48Vdc	8W	35°	97Ra	2700K	543.0 lm
				3000K	568.0 lm
				4000K	619.0 lm
48Vdc	8W	50°	97Ra	2700K	530.0 lm
				3000K	555.0 lm
				4000K	606.0 lm

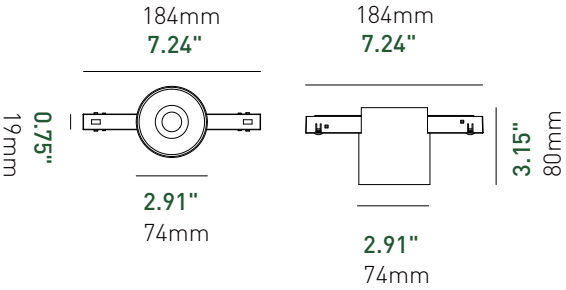

Finish




M19 XP74-ES80



Quick Info.


- System: 8W, CRI>97
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 25°, 35°, 50°
- Divd. Lumen: Up to 619lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution

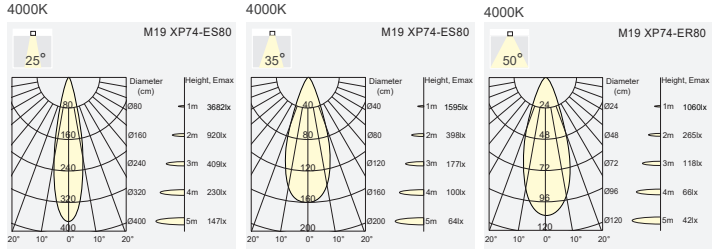

Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	8W	25°	97Ra	2700K	508.0 lm
				3000K	533.0 lm
				4000K	584.0 lm
48Vdc	8W	35°	97Ra	2700K	543.0 lm
				3000K	568.0 lm
				4000K	619.0 lm
48Vdc	8W	50°	97Ra	2700K	530.0 lm
				3000K	555.0 lm
				4000K	606.0 lm

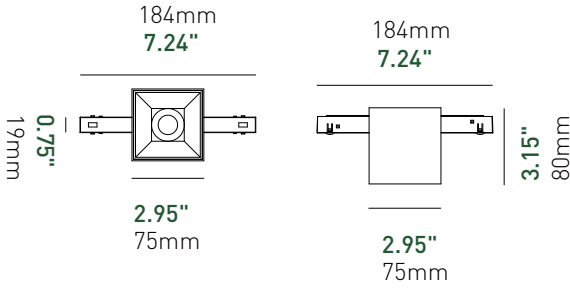

Finish






M19 GF20



Quick Info.


- System: 10W, CRI>95
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 30°
- Dlvd. Lumen: Up to 468lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution



Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	10W	30°	95Ra	2700K	418.0 lm
				3000K	438.0 lm
				4000K	468.0 lm

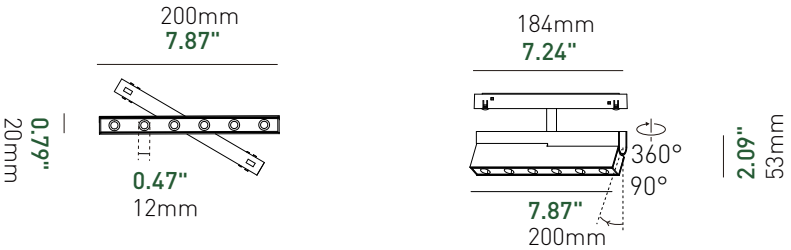

Finish




M19 FL20



Quick Info.


- System: 10W, CRI>95
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 120°
- Dlvd. Lumen: Up to 331lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution



Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	10W	120°	95Ra	2700K	267.0 lm
				3000K	288.0 lm
				4000K	331.0 lm

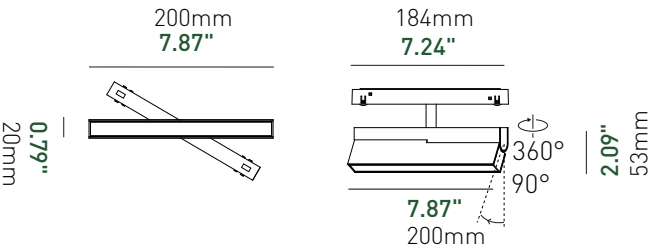

Finish




M19 GL12



Quick Info.

- System: 6W, CRI>97
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 210°
- Dlvd. Lumen: Up to 377lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution




Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	6W	210°	97Ra	2700K	341.0 lm
				3000K	359.0 lm
				4000K	377.0 lm

Finish



WhiteBlack

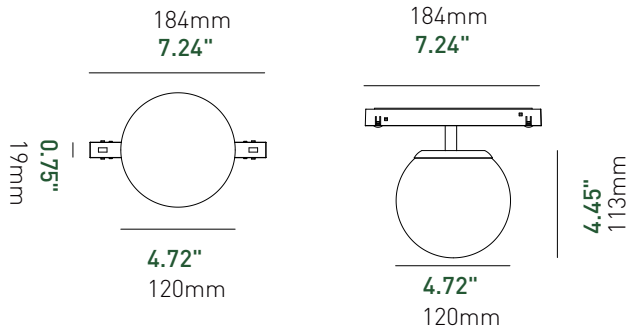


M19 GL12-D



Quick Info.

- System: 6W, CRI>97
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 210°
- Dlvd. Lumen: Up to 377lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution




Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	6W	210°	97Ra	2700K	341.0 lm
				3000K	359.0 lm
				4000K	377.0 lm

Finish



WhiteBlack

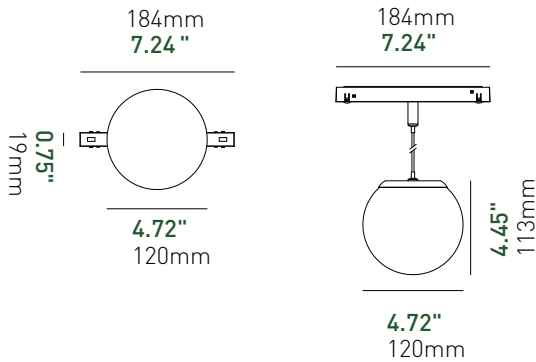


M19 XP20



Quick Info.

- System: 6W, CRI>97
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 25°
- Divd. Lumen: Up to 409lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI



Light Distribution



Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	6W	25°	97Ra	2700K	373.0 lm
				3000K	391.0 lm
				4000K	409.0 lm

Finish

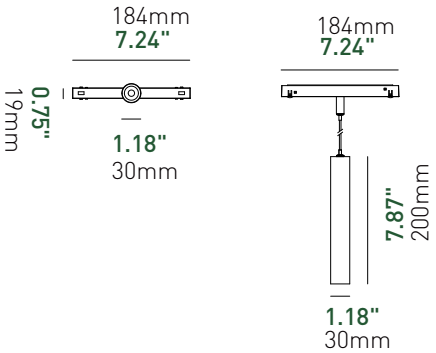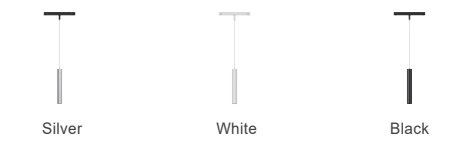



M19 XP15






Quick Info.

- System: 8W, CRI>97
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 25°, 35°, 50°
- Dlvd. Lumen: Up to 619lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution

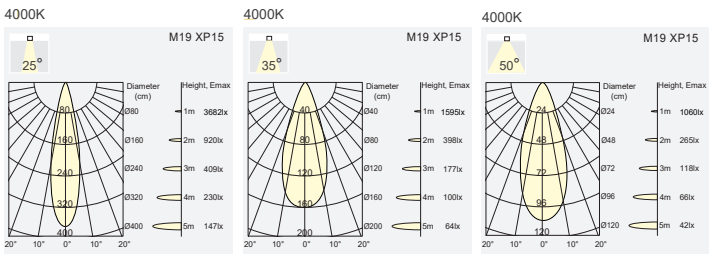

Product Specifications

Power	Beam Angle	CRI	CCT	Lumens
8W	25°	97Ra	2700K	508.0 lm
			3000K	533.0 lm
			4000K	584.0 lm
8W	35°	97Ra	2700K	543.0 lm
			3000K	568.0 lm
			4000K	619.0 lm
8W	50°	97Ra	2700K	530.0 lm
			3000K	555.0 lm
			4000K	606.0 lm

Finish

