

XRZLux®

Create Lighting for Life

2026

XRZLux®
Create Lighting for Life

Hangzhou XRZLux Co., Ltd.
Room503, Building 1#, No. 78 Gengwen Rd, Xiaoshan District, Hangzhou 310000, China.
info@xrzluxlight.com
www.xrzluxlight.com

XRZLux®

Create Lighting for Life

Round



Round
3"



Round
2"



Round
1"


Square



Square
3"



Square
6"×3"




Square
6"×6"

Round 3"



GK75-R01QS GK75-R01QT GK75-R03QS GK75-R03QT GK75-R05QS GK75-R05QT

GK75-R06QS GK75-R06QT GK75-R08QS GK75-R08QT GK75-R44QS GK75-R44QT



GK75-R11QS GK75-R13QS GK75-R14QS GK75-R15QS



GK75-R16QS GK75-R18QS

Round 2"




SG-S21QS SG-S21QT SG-S23QS SG-S23QT SG-S27QS SG-S27QT

Round 1"



GN45-R01QS GN45-R01QT GN45-R44QS GN45-R44QT



GN45-R06QS GN45-R06QT


Square 3"




GK75-S01QS GK75-S01QT GK75-S01QS2 GK75-S01QT2




GK75-S01QS4 GK75-S01QT4



GK75-S44QS GK75-S44QT GK75-S44QS2 GK75-S44QT2



GK75-S44QS4 GK75-S44QT4



GK75-S65QS

Round 0"


LN75-R25QS


LN75-R25QT


LN75-R26QS


LN75-R26QT

Linox


GK75-R20QS


GK75-R21QS


LN95-R84QS


LN12-R84QS


LN14-R84QS


LN95-R91QS



LN12-R91QS


LN14-R91QS


LN95-R00QS


LN12-R00QS

Gypsum 2"


SG-S31QT


SG-S33QT


SG-S36QT


SG-S10QT



SG-S05QT


SG-S04QT

Grille Series HIGH


HG-S05QS


HG-S05QT


HG-S10QS


HG-S10QT

Magnetic Track System M19


M19H Hanging


M19E Hanging


M19H Surface Mounted


M19E Surface Mounted


M19A Embedded


M19T Embedded


M19-SP30


M19-SP40


M19-SP42


M19-SP55


M19-SP57


M19-SP65


M19-XP55


M19-SP36

M19-GL20


M19-GL40

M19-GL80

M19-GL02

M19-GL04

M19-FL40

M19-FL80

M19 XP74-ER80

M19 XP74-ES80

M19 GF20

M19 FL20

M19 GL12

M19 GL12-D

M19 XP20

M19 XP15



P.Geek


- Improved P.Geek series contains not only 3", but also 2" and 1"
- Trimless mud–in rings and new construction brackets are supplied for all models
- With LED module design is still, changeable in finishing colors, beam angles, IP20/IP44/IP65, stretchable, snout, twins spots, polarized, and pinhole, to meet the various needs of the designers
- Separated frame and LED modules, are easy installed and maintained
- Cold–forged aluminum heat dissipation is twice the die–casting, extending its lifespan

P.Geek
3"



P.GEEK 3"

- Round and square. Trim, trimless and semi-recessed. Fixed, adjustable, stretchable, snout, and twins spot
- With magnetic fixing structure, the modules are easy installed and maintained

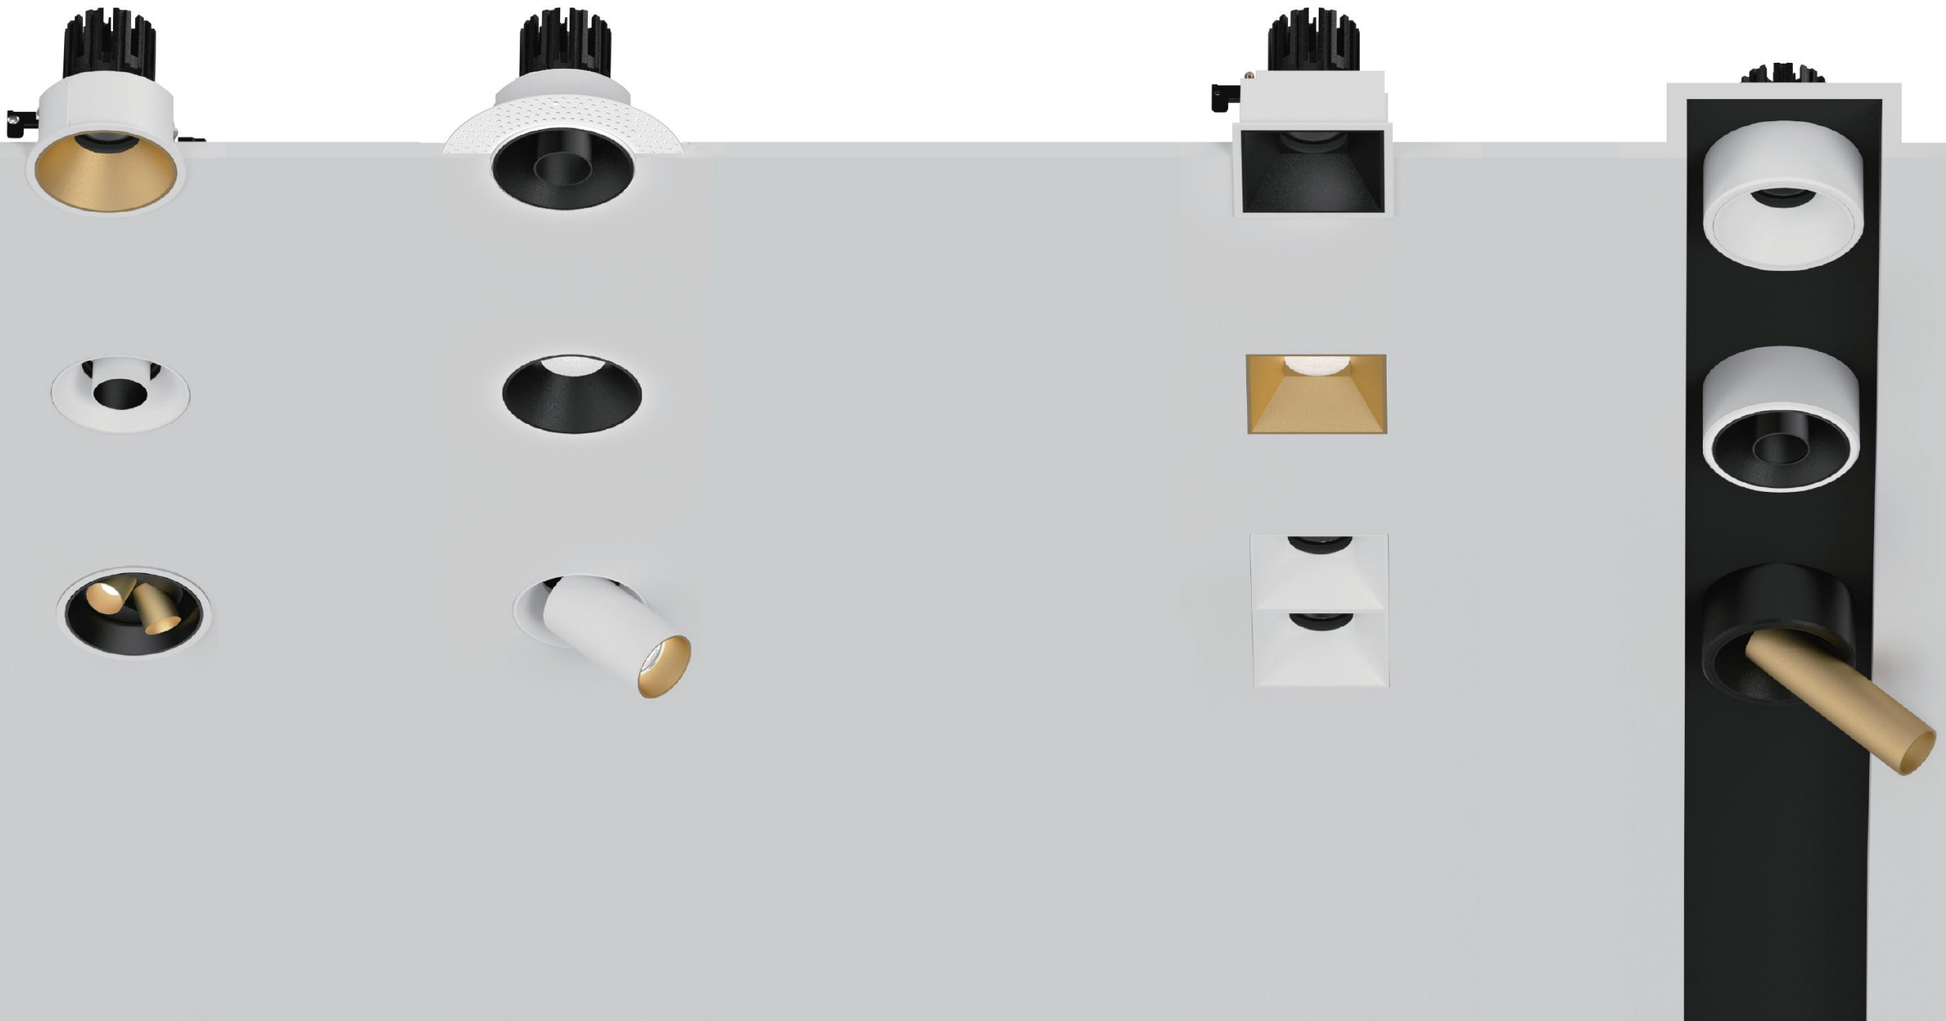

P.Geek 3"



Standard Structure



GK75-R01QS




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
15W	350mA	25°	Ra97	2700K 3000K 4000K	762.0lm 814.5lm 925.0lm
15W	350mA	35°	Ra90	2700K 3000K 4000K	1239.3lm 1291.8lm 1402.3lm
15W	350mA	50°	Ra90	2700K 3000K 4000K	1331.7lm 1384.2lm 1494.7lm

Intertek | 5 Years Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜13	50°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

3" (75mm) | Aluminum | Required Remote Driver*

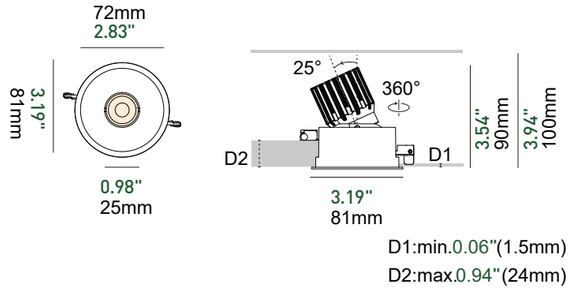

With Trim



Accessories



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

GK75-R01QT




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
15W	350mA	25°	Ra97	2700K 3000K 4000K	762.0lm 814.5lm 925.0lm
15W	350mA	35°	Ra90	2700K 3000K 4000K	1239.3lm 1291.8lm 1402.3lm
15W	350mA	50°	Ra90	2700K 3000K 4000K	1331.7lm 1384.2lm 1494.7lm

Intertek | 5 Years Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜13	50°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

3" (75mm) | Aluminum | Required Remote Driver*

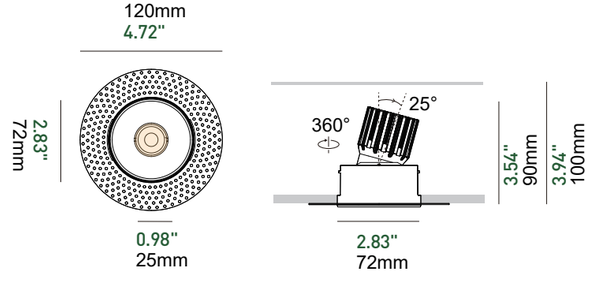

Trimless



White | Black | Golden | Black Mirror

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

GK75-R03QS




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
10W	250mA	25°	97Ra	2700K 3000K 4000K	490.5lm 543.0lm 653.5lm
10W	250mA	35°	90Ra	2700K 3000K 4000K	808.1lm 860.6lm 971.1lm

Intertek | 5 YEARS Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	<13	45°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

3" (75mm) | Aluminum | Required Remote

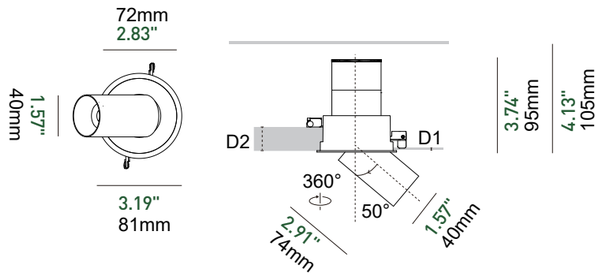

D1:min.0.06"(1.5mm)
D2:max.0.94" (24mm)

With Trim



W+W+W | W+W+B | B+W+B | B+B+B | W+W+G


Accessories



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI







GK75-R03QT




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
10W	250mA	25°	97Ra	2700K 3000K 4000K	490.5lm 543.0lm 653.5lm
10W	250mA	35°	90Ra	2700K 3000K 4000K	808.1lm 860.6lm 971.1lm

Intertek | 5 Years Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	<13	45°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

3" (75mm) | Aluminum | Required Remote Driver*

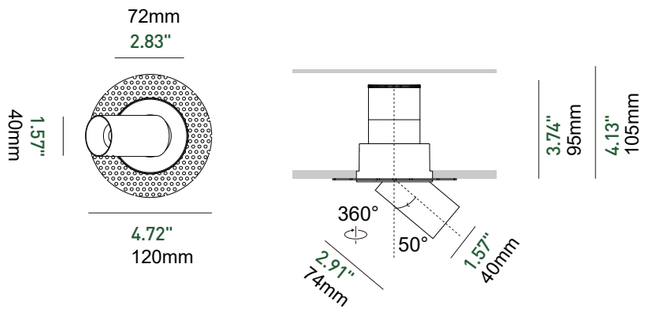


Trimless



W+W+W | W+W+B | B+W+B | B+B+B | W+W+G

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

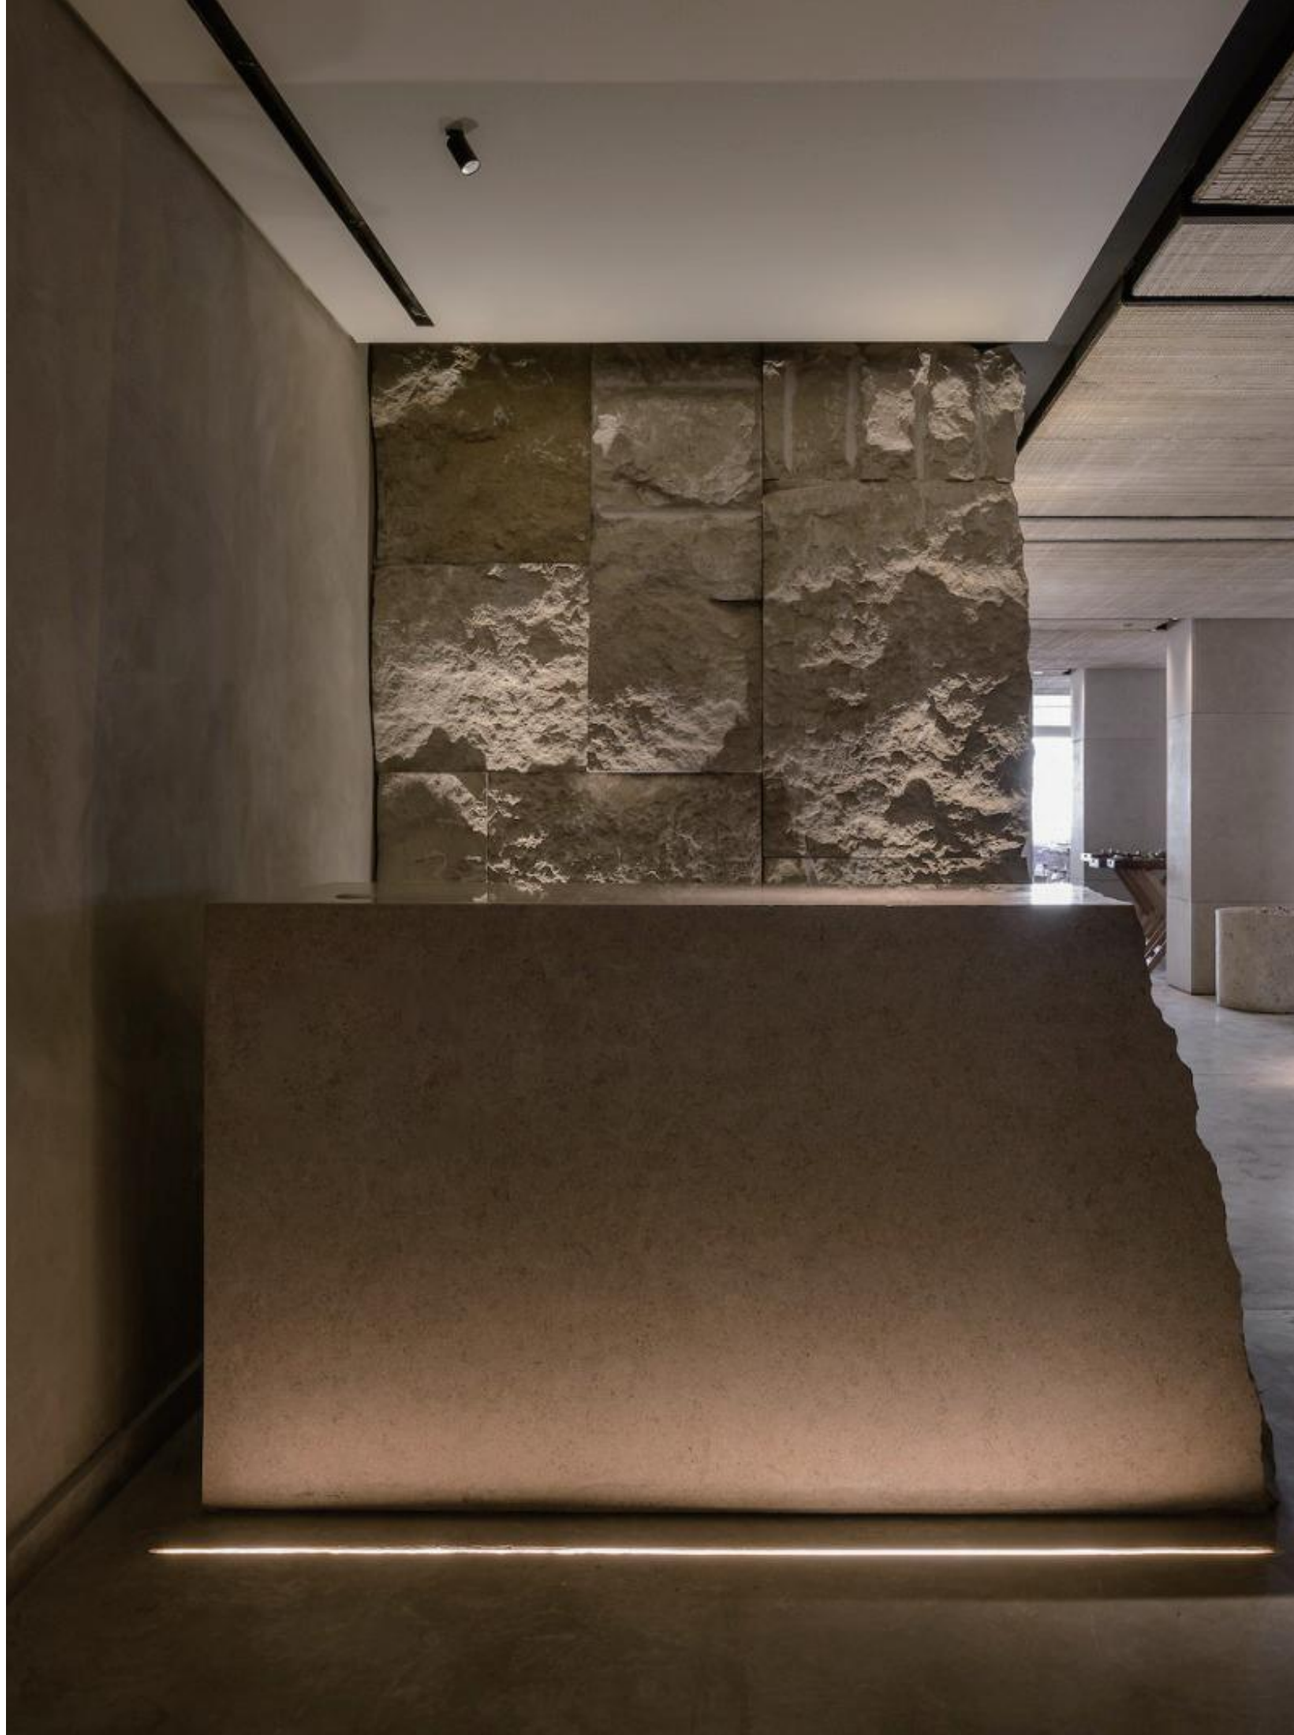

GK75-R05QS




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
15W	350mA	25°	97Ra	2700K 3000K 4000K	762.0lm 814.5lm 925.0lm
15W	350mA	35°	90Ra	2700K 3000K 4000K	1239.3lm 1291.8lm 1402.3lm

Intertek | 5 YEARS Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	<9	67°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

3" (75mm) | Aluminum | Required Remote Driver*

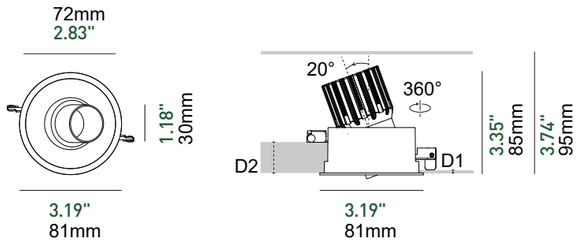

D1:min.0.06"(1.5mm)
D2:max.0.94" (24mm)

With Trim



W+W | W+B | B+B | G+G

Accessories



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

GK75-R05QT




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
15W	350mA	25°	97Ra	2700K 3000K 4000K	762.0lm 814.5lm 925.0lm
15W	350mA	35°	90Ra	2700K 3000K 4000K	1239.3lm 1291.8lm 1402.3lm

Intertek | 5 YEARS Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	<9	67°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

3" (75mm) | Aluminum | Required Remote Driver*

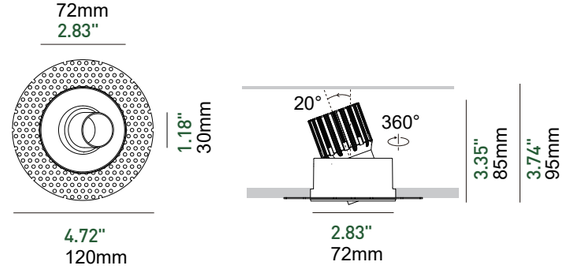

Trimless



W+W | W+B | B+B | G+G

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

GK75-R06QS




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
8W	200mA	25°	97Ra	2700K 3000K 4000K	381.9lm 434.4lm 544.9lm
8W	200mA	35°	90Ra	2700K 3000K 4000K	636.0lm 688.5lm 799.0lm

Intertek | 5 YEARS Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	<9	62°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE | 3" (75mm) | Aluminum | Required Remote Driver*

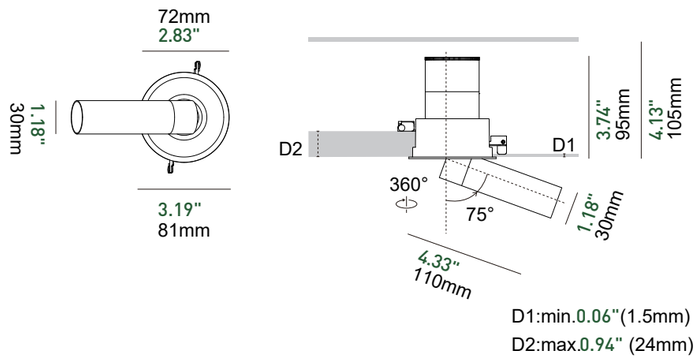

D1:min.0.06"(1.5mm)
D2:max.0.94" (24mm)

With Trim



W+W+W | W+W+B | W+W+G | B+W+B | B+B+B

Accessories



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

GK75-R06QT




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
8W	200mA	25°	97Ra	2700K 3000K 4000K	381.9lm 434.4lm 544.9lm
8W	200mA	35°	90Ra	2700K 3000K 4000K	636.0lm 688.5lm 799.0lm

Intertek | 5 YEARS Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	<9	62°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE | 3" (75mm) | Aluminum | Required Remote Driver*

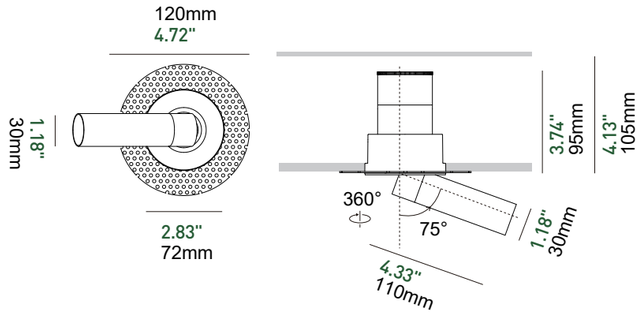


Trimless



W+W+W | W+W+B | W+W+G | B+W+B | B+B+B

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

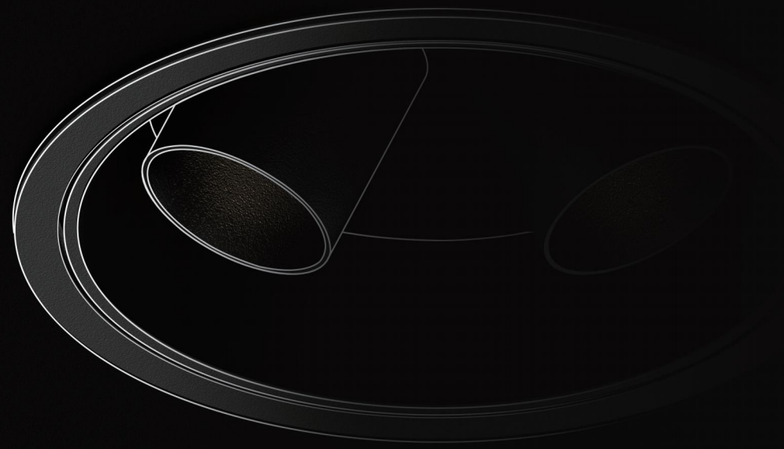

Twins

GK75-R08QS




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
8W	200mA	25°	90Ra	2700K 3000K 4000K	267.5lm 320.0lm 430.5lm

Intertek | 5 YEARS Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	＜13	45°

MacAdam Step 3 | Non-IC Rated | USE

3" (75mm) | Aluminum | Required Remote Driver*

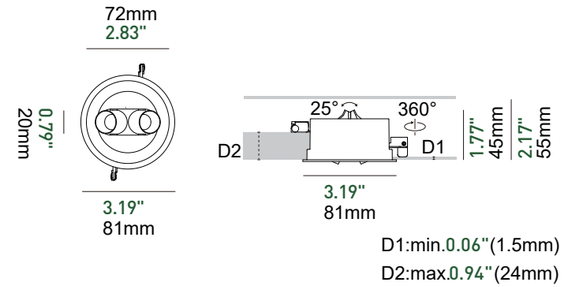

D1:min.0.06"(1.5mm)
D2:max.0.94"(24mm)

With Trim




Accessories



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

GK75-R08QT




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
8W	200mA	25°	90Ra	2700K 3000K 4000K	267.5lm 320.0lm 430.5lm

Intertek | 5 YEARS Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	＜13	45°

MacAdam Step 3 | Non-IC Rated | USE

3" (75mm) | Aluminum | Required Remote Driver*

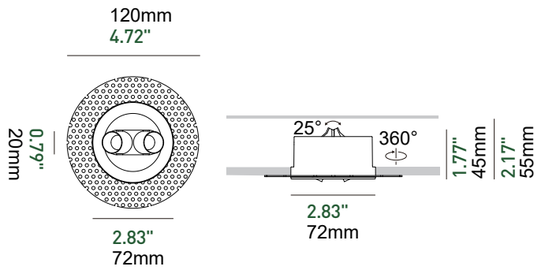

Trimless




Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

GK75-R08QS/T

- With its innovative two adjustable spots on a single module, Geek Twins brings genius, diverse solutions for accent lighting.
- Geek Twins, with a high-CRI LED light source, fits applications like fine artworks, corridors, indoor plants, show stands, or statues.



Twins' Four Applications

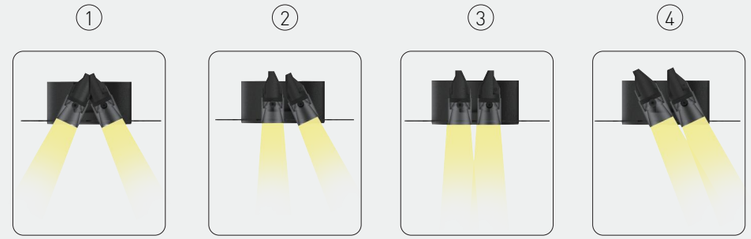

GK75-R44QS




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
15W	350mA	25°	97Ra	2700K 3000K 4000K	762.0lm 814.5lm 925.0lm
15W	350mA	35°	90Ra	2700K 3000K 4000K	1089.3lm 1141.8lm 1252.3lm
15W	350mA	50°	90Ra	2700K 3000K 4000K	1181.7lm 1234.2lm 1344.7lm

Intertek | 5 Year Warranty | FC | Damp Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	<16	35°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

3" (75mm) | Aluminum | Required Remote Driver*

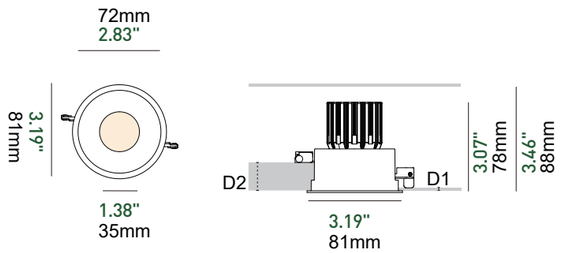

D1:min.0.06"(1.5mm)
D2:max.0.94"(24mm)

With Trim



Accessories



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI





GK75-R44QT




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
15W	350mA	25°	97Ra	2700K 3000K 4000K	762.0lm 814.5lm 925.0lm
15W	350mA	35°	90Ra	2700K 3000K 4000K	1089.3lm 1141.8lm 1252.3lm
15W	350mA	50°	90Ra	2700K 3000K 4000K	1181.7lm 1234.2lm 1344.7lm


Intertek | 5 YEARS Warranty | FC | Damp Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜16	35°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

3" (75mm) | Aluminum | Required Remote Driver*






Trimless

White | Black | Golden | Black Mirror

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

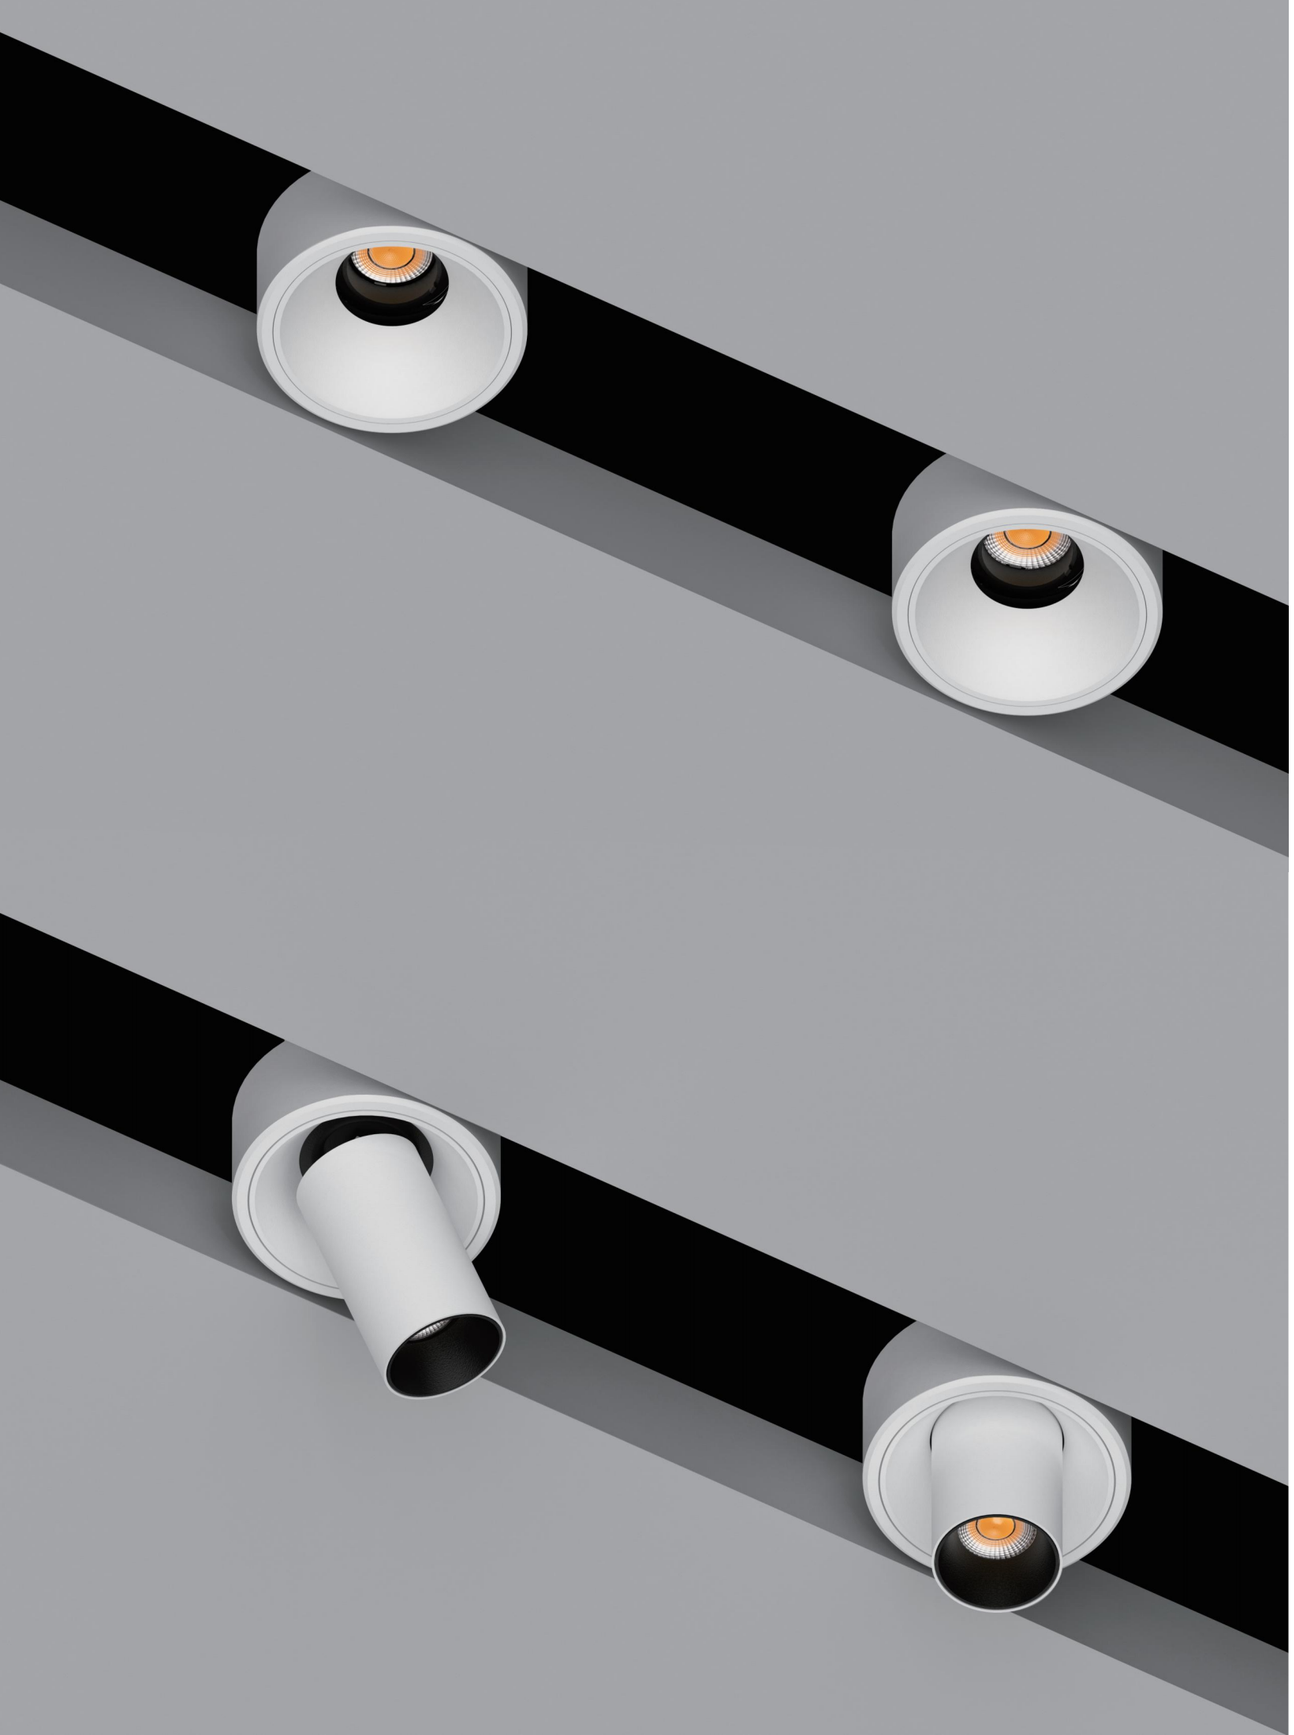

GK75-R11QS




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
15W	350mA	25°	97Ra	2700K 3000K 4000K	762.0lm 814.5lm 925.0lm
15W	350mA	35°	90Ra	2700K 3000K 4000K	1239.3lm 1291.8lm 1402.3lm
15W	350mA	50°	90Ra	2700K 3000K 4000K	1331.7lm 1384.2lm 1494.7lm


Intertek | 5 Years Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜13	50°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | UL USE

3" (75mm) | Aluminum | Required Remote Driver*



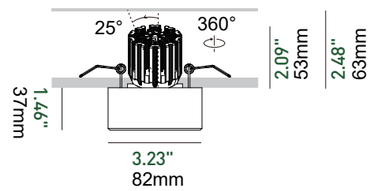

Color



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI





GK75-R13QS


P.system	I (led)	Beam Angle	CRI	CCT	Lumens
10W	250mA	25°	97Ra	2700K 3000K 4000K	490.5lm 543.0lm 653.5lm
10W	250mA	35°	90Ra	2700K 3000K 4000K	808.1lm 860.6lm 971.1lm

Intertek | 5 YEARS Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜13	45°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

3" (75mm) | Aluminum | Required Remote Driver*

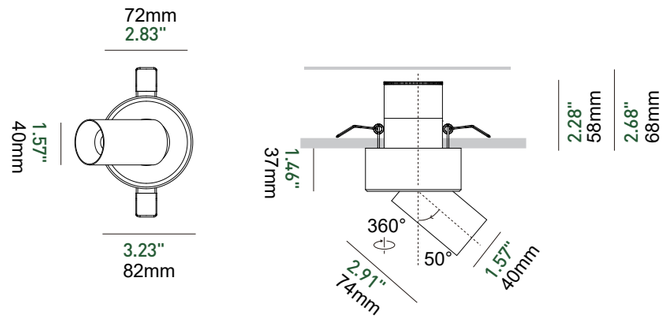

Color



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

GK75-R14QS




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
15W	350mA	25°	97Ra	2700K 3000K 4000K	762.0lm 814.5lm 925.0lm
15W	350mA	35°	90Ra	2700K 3000K 4000K	1089.3lm 1141.8lm 1252.3lm
15W	350mA	50°	90Ra	2700K 3000K 4000K	1181.7lm 1234.2lm 1344.7lm

ETL Intertek | 5 YEARS Warranty | FC | Damp Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜16	35°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE | 3" (75mm) | Aluminum | Required Remote Driver*

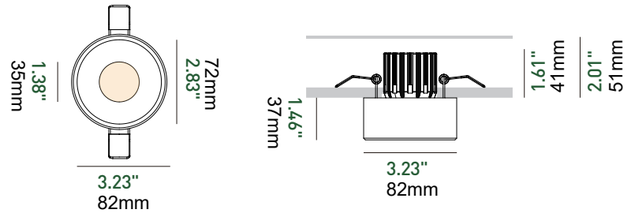

Color



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

GK75-R15QS




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
15W	350mA	25°	97Ra	2700K 3000K 4000K	762.0lm 814.5lm 925.0lm
15W	350mA	35°	90Ra	2700K 3000K 4000K	1239.3lm 1291.8lm 1402.3lm

ETL Intertek | 5 YEARS Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra//97Ra	＜9	67°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE | 3" (75mm) | Aluminum | Required Remote Driver*

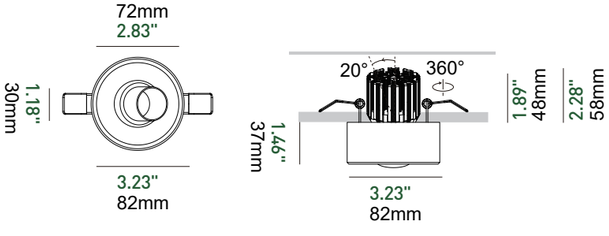

Color



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

GK75-R16QS




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
8W	200mA	25°	97Ra	2700K 3000K 4000K	381.9lm 434.4lm 544.9lm
8W	200mA	35°	90Ra	2700K 3000K 4000K	636.0lm 688.5lm 799.0lm


Intertek | 5 YEARS Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜9	62°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | | USE

3" (75mm) | Aluminum | Required Remote Driver*



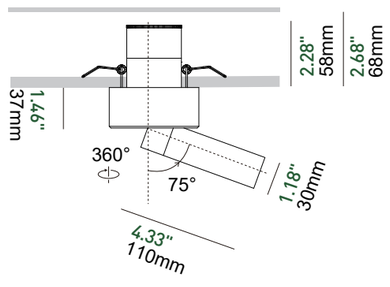

Color



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

GK75-R18QS




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
8W	200mA	25°	90Ra	2700K 3000K 4000K	267.5lm 320.0lm 430.5lm


Intertek | 5 YEARS Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	＜13	45°

MacAdam Step 3 | Non-IC Rated | | USE

3" (75mm) | Aluminum | Required Remote Driver*



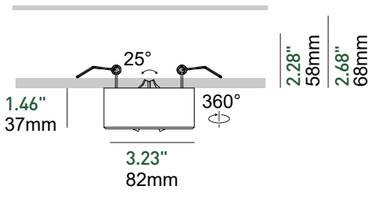

Color



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

P.Geek 3”



Adjustable
IP20



Fixed
IP44



With Trim
Single



Trimless
Single



With Trim
Double



Trimless
Double



With Trim
Four Heads



Trimless
Four Heads



GK75-S01QS

GK75-S01QT



GK75-S01QS2

GK75-S01QT2



GK75-S01QS4

GK75-S01QT4



GK75-S44QS

GK75-S44QT



GK75-S44QS2

GK75-S44QT2



GK75-S44QS4

GK75-S44QT4



GK75-S01QS




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
15W	350mA	25°	97Ra	2700K 3000K 4000K	762.0lm 814.5lm 925.0lm
15W	350mA	35°	90Ra	2700K 3000K 4000K	1239.3lm 1291.8lm 1402.3lm
15W	350mA	50°	90Ra	2700K 3000K 4000K	1331.7lm 1384.2lm 1494.7lm

Intertek | 5 Years Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜13	50°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

3"*3" (75*75mm) | Aluminum | Required Remote Driver*

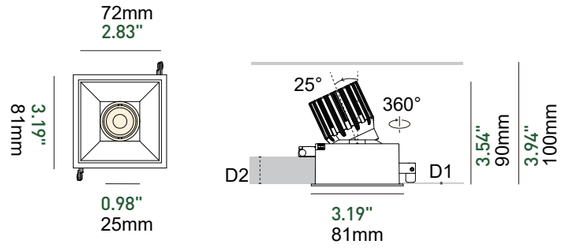

D1:min.0.06"(1.5mm)
D2:max.0.94" (24mm)

With Trim



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

GK75-S01QT




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
15W	350mA	25°	97Ra	2700K 3000K 4000K	762.0lm 814.5lm 925.0lm
15W	350mA	35°	90Ra	2700K 3000K 4000K	1239.3lm 1291.8lm 1402.3lm
15W	350mA	50°	90Ra	2700K 3000K 4000K	1331.7lm 1384.2lm 1494.7lm

Intertek | 5 Years Warranty | FC | Dry Location | Fast Connect


Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜13	50°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

3"*3" (75*75mm) | Aluminum | Required Remote Driver*

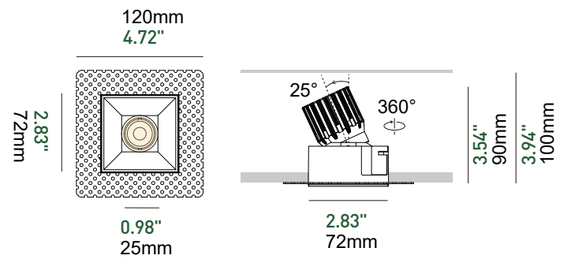

Trimless



White | Black | Golden

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

GK75-S01QS2




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
2*15W	2*350mA	25°	97Ra	2700K 3000K 4000K	1524.0lm 1629.0lm 1850.0lm
2*15W	2*350mA	35°	90Ra	2700K 3000K 4000K	2478.6lm 2583.6lm 2804.6lm
2*15W	2*350mA	50°	90Ra	2700K 3000K 4000K	2663.4lm 2768.4lm 2989.4lm

Intertek | 5 Year Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜13	50°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

3"*6" (75*150mm) | Aluminum | Required Remote Driver*

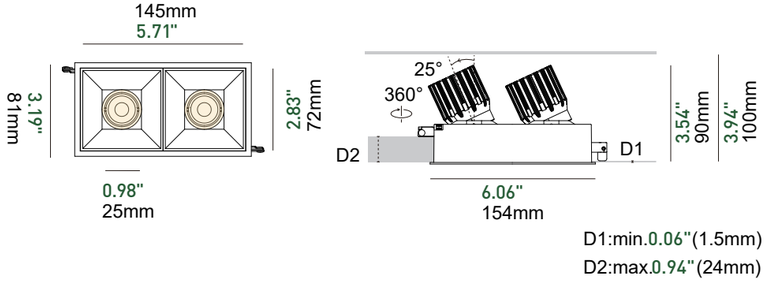

With Trim



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

GK75-S01QT2




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
2*15W	2*350mA	25°	97Ra	2700K 3000K 4000K	1524.0lm 1629.0lm 1850.0lm
2*15W	2*350mA	35°	90Ra	2700K 3000K 4000K	2478.6lm 2583.6lm 2804.6lm
2*15W	2*350mA	50°	90Ra	2700K 3000K 4000K	2663.4lm 2768.4lm 2989.4lm

Intertek | 5 Year Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜13	50°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

3"*6" (75*150mm) | Aluminum | Required Remote Driver*

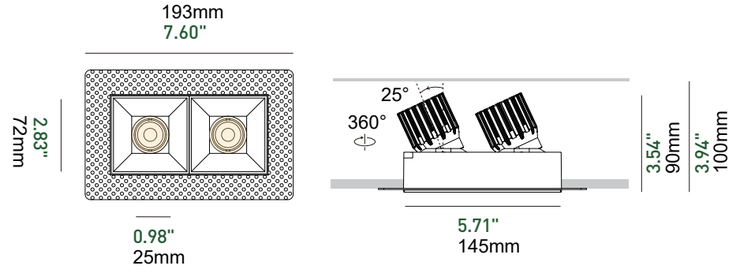


Trimless



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

GK75-S01QS4




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
4*15W	4*350mA	25°	97Ra	2700K 3000K 4000K	3048.0lm 3258.0lm 3700.0lm
4*15W	4*350mA	35°	90Ra	2700K 3000K 4000K	4957.2lm 5167.2lm 5609.2lm
4*15W	4*350mA	50°	90Ra	2700K 3000K 4000K	5326.8lm 5536.8lm 5978.8lm

Intertek | 5 Years Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜13	50°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

6"*6" (150*150mm) | Aluminum | Required Remote

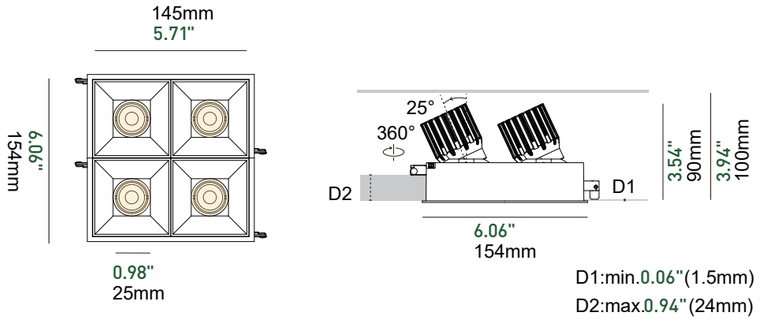


With Trim



White | Black | Golden

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

GK75-S01QT4




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
4*15W	4*350mA	25°	97Ra	2700K 3000K 4000K	3048.0lm 3258.0lm 3700.0lm
4*15W	4*350mA	35°	90Ra	2700K 3000K 4000K	4957.2lm 5167.2lm 5609.2lm
4*15W	4*350mA	50°	90Ra	2700K 3000K 4000K	5326.8lm 5536.8lm 5978.8lm

Intertek | 5 Years Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜13	50°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

6"*6" (150*150mm) | Aluminum | Required Remote

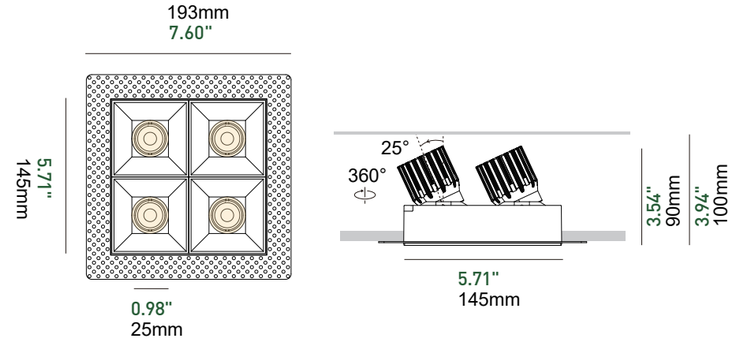


Trimless



White | Black | Golden

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

GK75-S44QS




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
15W	350mA	25°	97Ra	2700K 3000K 4000K	762.0lm 814.5lm 925.0lm
15W	350mA	35°	90Ra	2700K 3000K 4000K	1089.3lm 1141.8lm 1252.3lm
15W	350mA	50°	90Ra	2700K 3000K 4000K	1181.7lm 1234.2lm 1344.7lm

Intertek | 5 Years Warranty | FC | Damp Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜16	35°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

3"*3" (75*75mm) | Aluminum | Required Remote Driver*

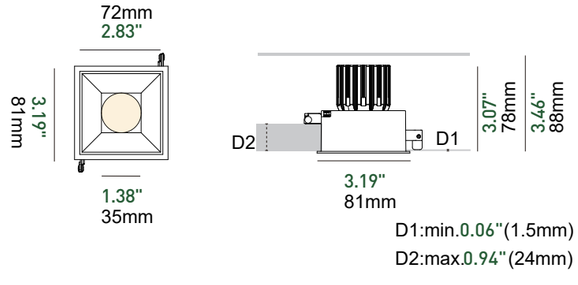


With Trim



Driver Voltage： AC100-120V Driver Options：ON/OFF DIM TRIAC DIM 0/1-10V DIM DALI

GK75-S44QT




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
15W	350mA	25°	97Ra	2700K 3000K 4000K	762.0lm 814.5lm 925.0lm
15W	350mA	35°	90Ra	2700K 3000K 4000K	1089.3lm 1141.8lm 1252.3lm
15W	350mA	50°	90Ra	2700K 3000K 4000K	1181.7lm 1234.2lm 1344.7lm

Intertek | 5 Years Warranty | FC | Damp Location | Fast Connect


Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜16	35°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

3"*3" (75*75mm) | Aluminum | Required Remote Driver*

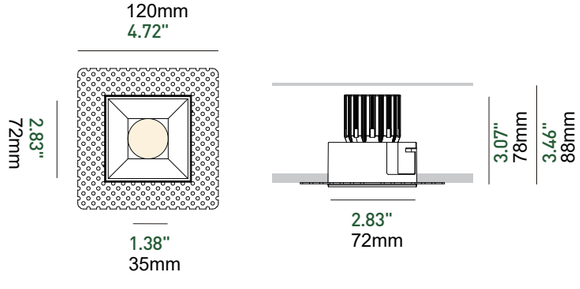


Trimless



White Black Golden

Driver Voltage： AC100-120V Driver Options：ON/OFF DIM TRIAC DIM 0/1-10V DIM DALI

GK75-S44QS2




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
2*15W	2*350mA	25°	97Ra	2700K 3000K 4000K	1524.0lm 1629.0lm 1850.0lm
2*15W	2*350mA	35°	90Ra	2700K 3000K 4000K	2178.6lm 2283.6lm 2504.6lm
2*15W	2*350mA	50°	90Ra	2700K 3000K 4000K	2363.4lm 2468.4lm 2689.4lm

ETL Intertek | 5 Years Warranty | FC | Damp Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜16	35°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

3"*6" (75*150mm) | Aluminum | Required Remote Driver*

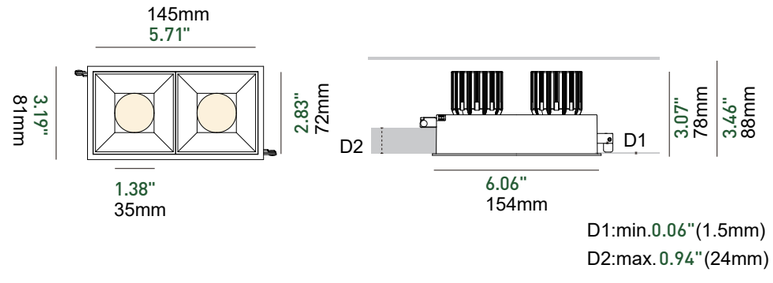


With Trim



White Black Golden

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

GK75-S44QT2




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
2*15W	2*350mA	25°	97Ra	2700K 3000K 4000K	1524.0lm 1629.0lm 1850.0lm
2*15W	2*350mA	35°	90Ra	2700K 3000K 4000K	2178.6lm 2283.6lm 2504.6lm
2*15W	2*350mA	50°	90Ra	2700K 3000K 4000K	2363.4lm 2468.4lm 2689.4lm

ETL Intertek | 5 Years Warranty | FC | Damp Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜16	35°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

3"*6" (75*150mm) | Aluminum | Required Remote Driver*

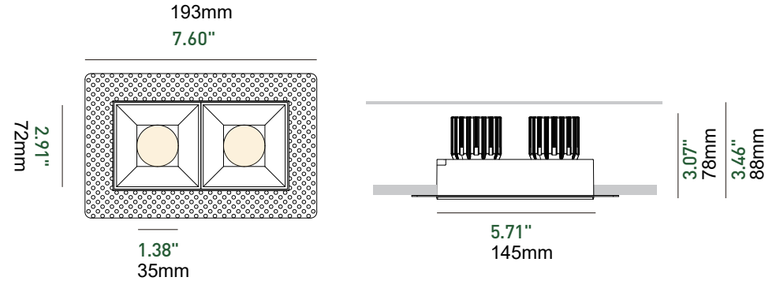


Trimless



White Black Golden

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

GK75-S44QS4




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
4*15W	4*350mA	25°	97Ra	2700K 3000K 4000K	3048.0lm 3258.0lm 3700.0lm
4*15W	4*350mA	35°	90Ra	2700K 3000K 4000K	4357.2lm 4567.2lm 5009.2lm
4*15W	4*350mA	50°	90Ra	2700K 3000K 4000K	4726.8lm 4936.8lm 5378.8lm


Intertek | 5 Year Warranty | FC | Damp Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜16	35°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE


6"*6" (150*150mm) | Aluminum | Required Remote Driver*



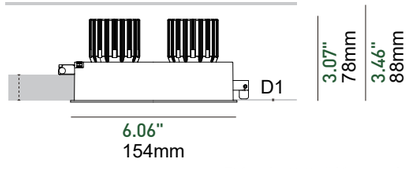

D1:min.0.06"(1.5mm)
D2:max.0.94" (24mm)


With Trim



White | Black | Golden

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

GK75-S44QT4




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
4*15W	4*350mA	25°	97Ra	2700K 3000K 4000K	3048.0lm 3258.0lm 3700.0lm
4*15W	4*350mA	35°	90Ra	2700K 3000K 4000K	4357.2lm 4567.2lm 5009.2lm
4*15W	4*350mA	50°	90Ra	2700K 3000K 4000K	4726.8lm 4936.8lm 5378.8lm


Intertek | 5 Year Warranty | FC | Damp Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜16	35°


MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

6"*6" (150*150mm) | Aluminum | Required Remote Driver*



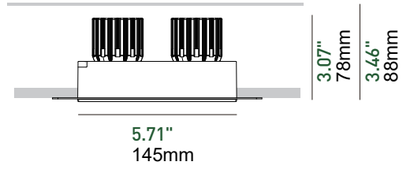


Trimless



White | Black | Golden

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

GK75-S65QS




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
15W	350mA	25°	97Ra	2700K 3000K 4000K	762.0lm 814.5lm 925.0lm
15W	350mA	35°	90Ra	2700K 3000K 4000K	1089.3lm 1141.8lm 1252.3lm
15W	350mA	50°	90Ra	2700K 3000K 4000K	1181.7lm 1234.2lm 1344.7lm

Intertek | 5 Years Warranty | FC | Covered wet Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜16	35°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

3"*3" (75*75mm) | Aluminum | Required Remote Driver*

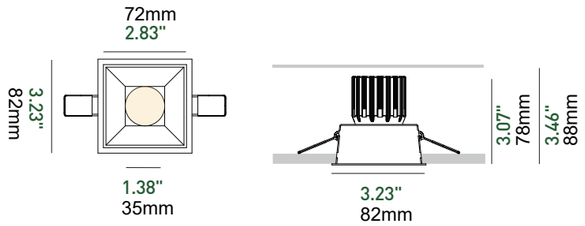

Color



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI



Accessories


Drivers in Junction Box



- **CMEM55** Triac
- **CVM55** 0-10V
- **UNM55** Universal(Triac&0-10V)

8W/10W/12W/15W

For 1






KIG-DWJ

Triac/0-10V/1-10V


Potentiometer/10V PWM 5 in 1

20W/40W/60W

For 1-4

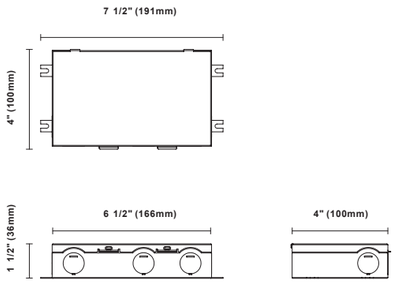

Rough-in Plate for New-Construction





BRKT-2S75

For P.GEEK trim & trimless

Cut out:

Square: □3"*6"(□77mm*150mm)

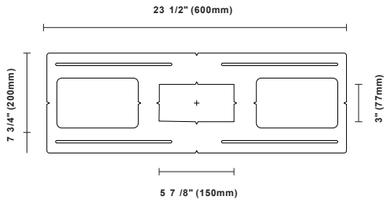




BRKT-2R75A

For P.GEEK trim & trimless

Cut out:

Round: Ø3"*2(Ø77mm)

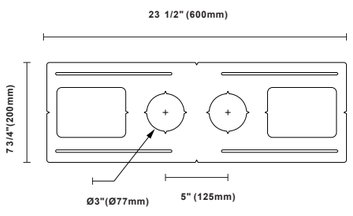


Remark

Tailored brackets are available with a reasonable surcharge, details as below,

- The customized brackets' dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests

For more information, please get in touch with XRZLux sales.

Brackets for New-Construction (4-legs)




NCP-SR3-R21


For P.GEEK trim & trimless

Cut out:


Round: Ø3"(Ø77mm)
Ø2"(Ø62mm)
Ø1"(Ø50mm)

Square: □3"(□77mm)

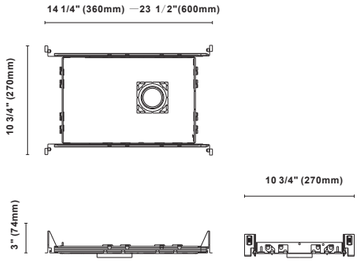

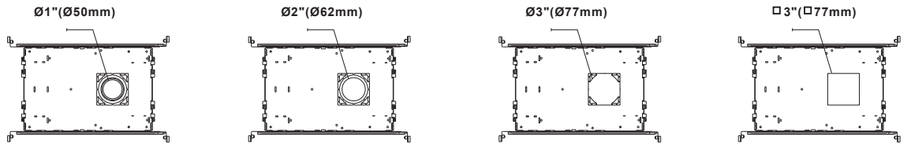

IC-Box for New-Construction (4-legs)




NCBX-SR3-R21


For P.GEEK trim & trimless

Cut out:


Round: Ø3"(Ø77mm)
Ø2"(Ø62mm)
Ø1"(Ø50mm)

Square: □3"(□77mm)

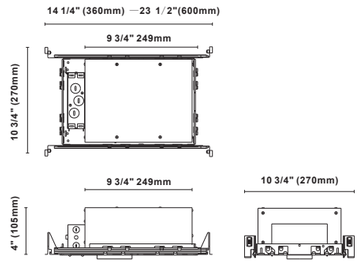


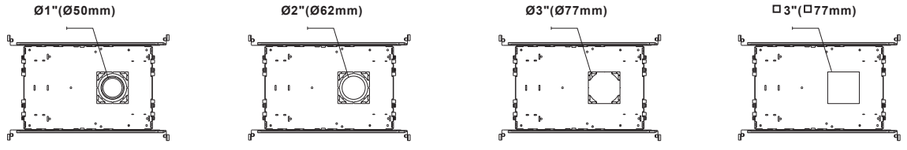


NON-IC Wire Diagram

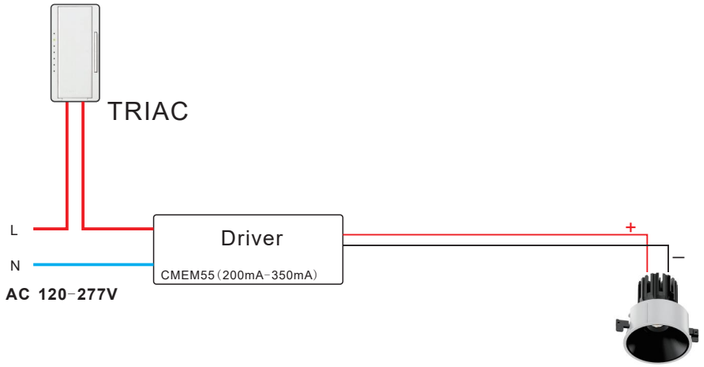

For 1

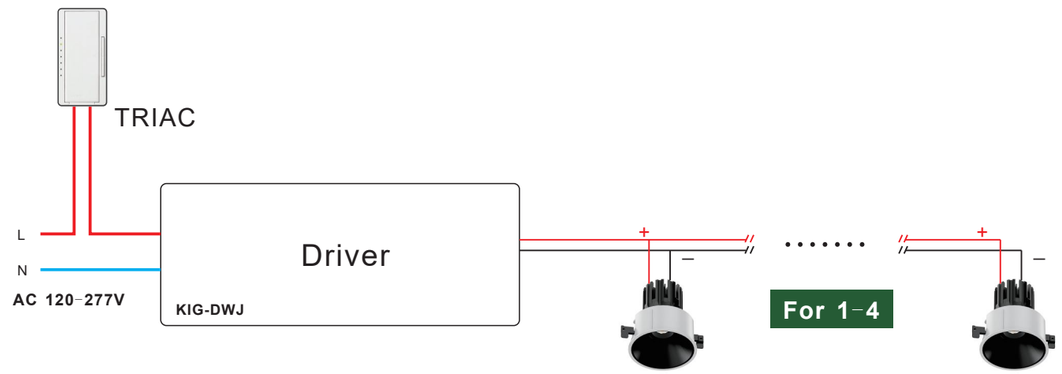


For 1-4

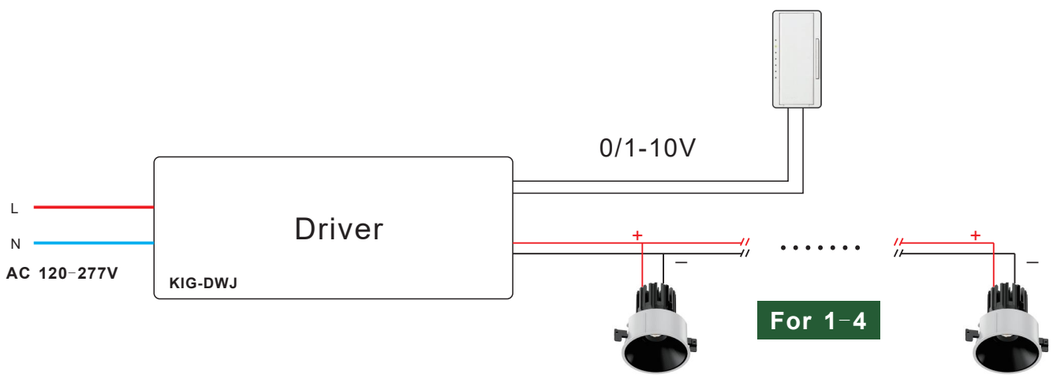


For 1-4


IC Rated Wire Diagram

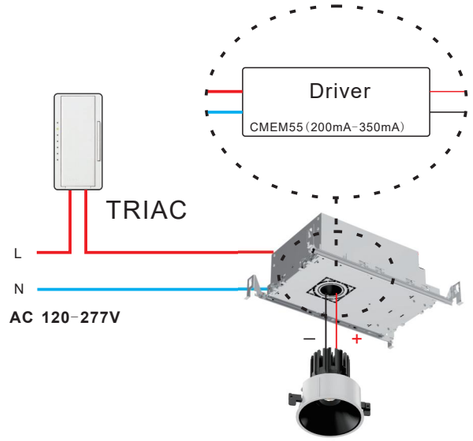

For 1

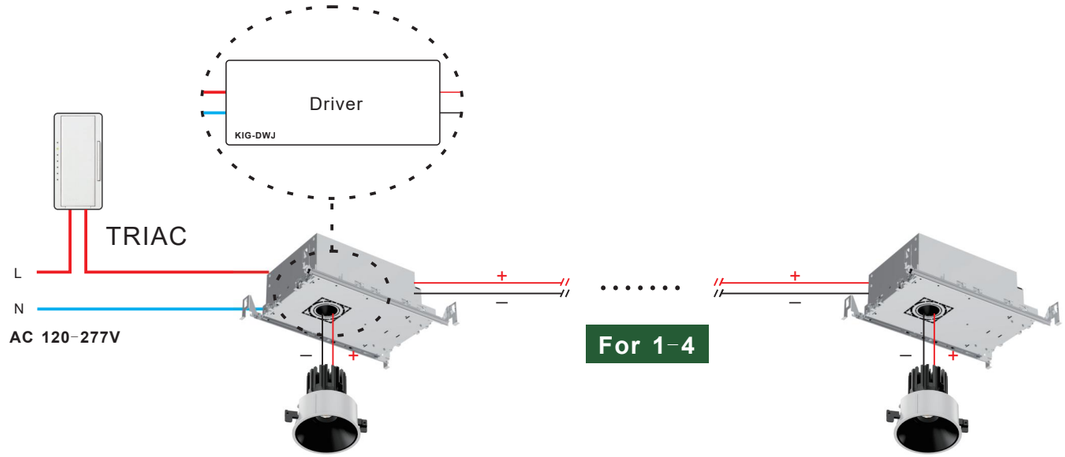

For 1-4

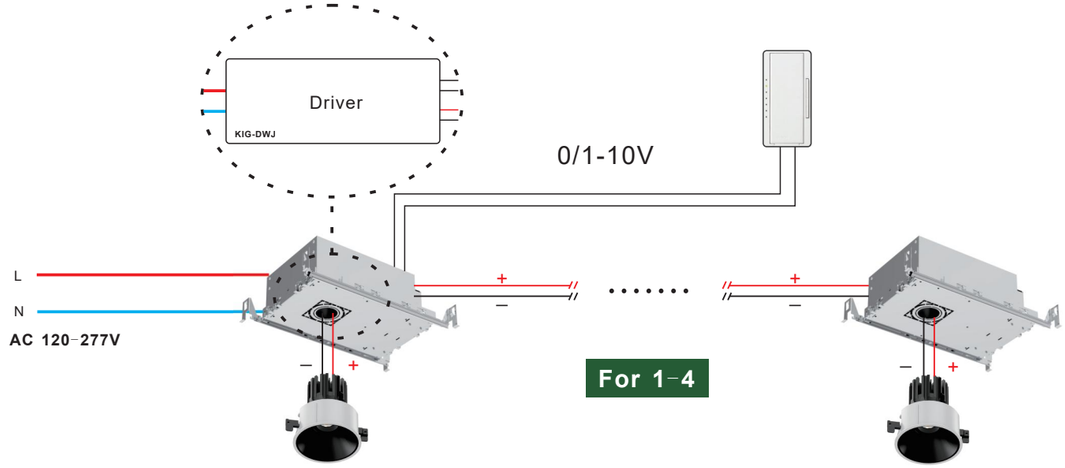

For 1-4

P.Geek 2"



With Trim



Trimless



Adjustable
IP20



Adjustable
IP20



Wall washer
IP20




SG-S21QS



SG-S23QS



SG-S27QS



SG-S21QT



SG-S23QT



SG-S27QT

SG-S21QS




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
15W	350mA	25°	97Ra	2700K 3000K 4000K	762.0 lm 814.5 lm 925.0 lm
15W	350mA	35°	90Ra	2700K 3000K 4000K	1239.3 lm 1291.8 lm 1402.3 lm
15W	350mA	50°	90Ra	2700K 3000K 4000K	1331.7 lm 1384.2 lm 1494.7 lm

Intertek | 5 YEARS Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	<13	50°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

2" (62mm) | Aluminum | Required Remote Driver*

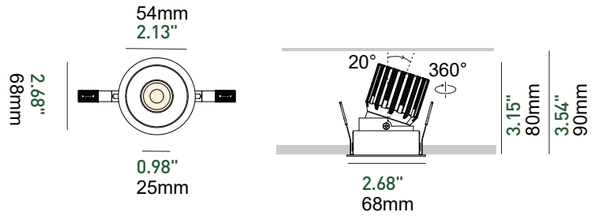

With Trim



White Black

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

SG-S21QT




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
15W	350mA	25°	97Ra	2700K 3000K 4000K	762.0 lm 814.5 lm 925.0 lm
15W	350mA	35°	90Ra	2700K 3000K 4000K	1239.3 lm 1291.8 lm 1402.3 lm
15W	350mA	50°	90Ra	2700K 3000K 4000K	1331.7 lm 1384.2 lm 1494.7 lm

Intertek | 5 YEARS Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	<13	50°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

2" (62mm) | Aluminum | Required Remote Driver*

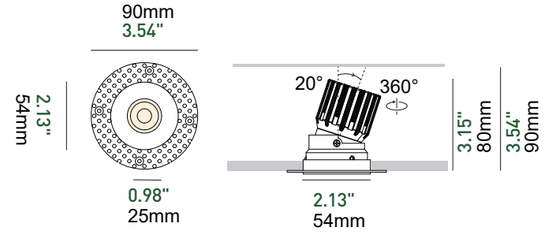

Trimless



White Black

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

SG-S23QS




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
10W	250mA	25°	97Ra	2700K 3000K 4000K	490.5 lm 543.0 lm 653.5 lm
10W	250mA	35°	90Ra	2700K 3000K 4000K	808.7 lm 861.2 lm 971.7 lm

Intertek | 5 YEARS Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜13	50°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

2" (62mm) | Aluminum | Required Remote Driver*

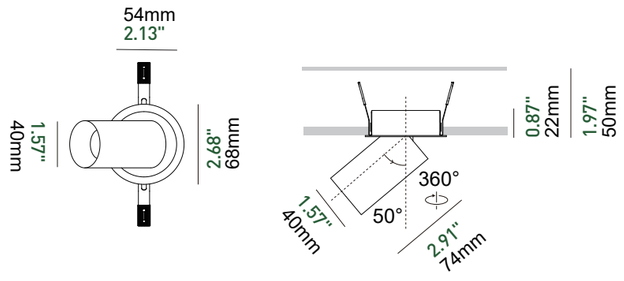

With Trim



W+W+W | B+W+B | B+B+B | W+W+B

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

SG-S23QT




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
10W	250mA	25°	97Ra	2700K 3000K 4000K	490.5 lm 543.0 lm 653.5 lm
10W	250mA	35°	90Ra	2700K 3000K 4000K	808.7 lm 861.2 lm 971.7 lm

Intertek | 5 YEARS Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜13	50°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

2" (62mm) | Aluminum | Required Remote Driver*

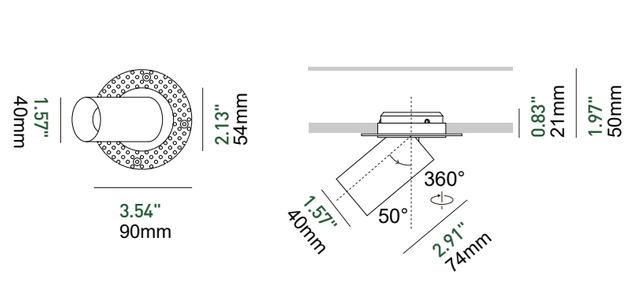

Trimless



W+W+W | B+W+B | B+B+B | W+W+B

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

SG-S27Q


2" Wall washer

Dia 2", strong cold-forged pure Alu. engine improves the Dlvd lumens up to 1344.7lm

NEW




SG-S27QS




SG-S27QT


Wall Washer

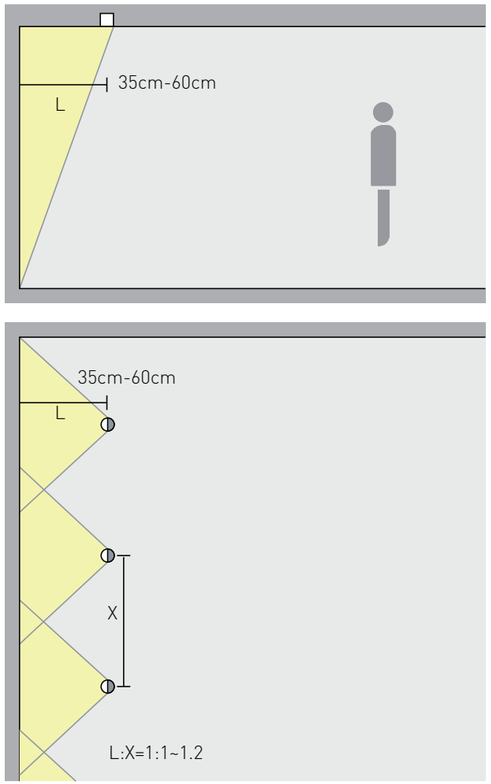



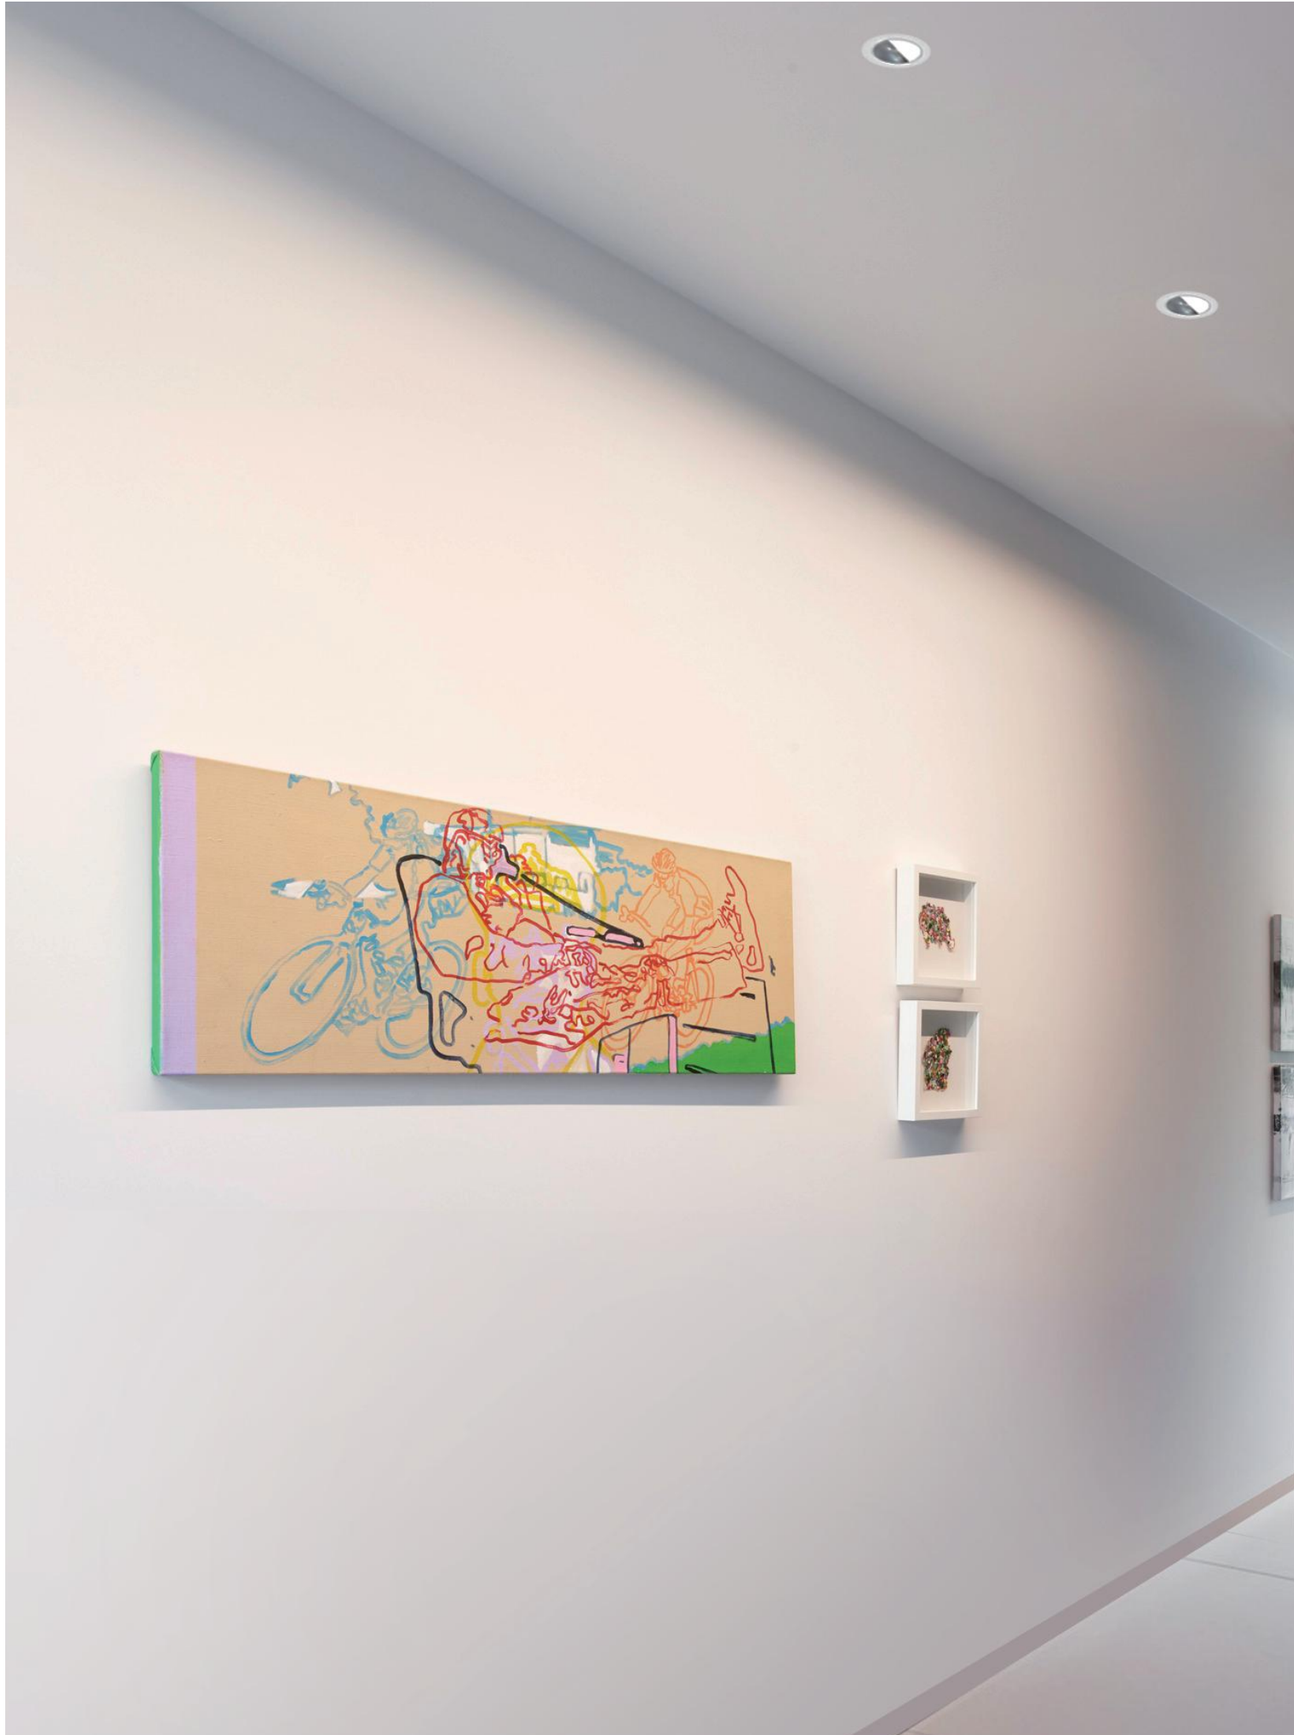

SG-S27QS




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
15W	350mA	wall washer	90Ra	2700K 3000K 4000K	1181.7 lm 1234.2 lm 1344.7 lm

ETL Intertek | 5 Years Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	/	/

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

2" (62mm) | Aluminum | Required Remote Driver*

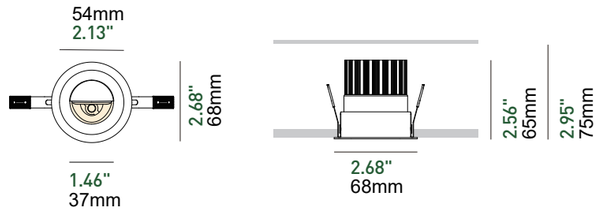


With Trim

White | Black

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

SG-S27QT




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
15W	350mA	wall washer	90Ra	2700K 3000K 4000K	1181.7 lm 1234.2 lm 1344.7 lm

ETL Intertek | 5 Years Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	/	/

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

2" (62mm) | Aluminum | Required Remote Driver*

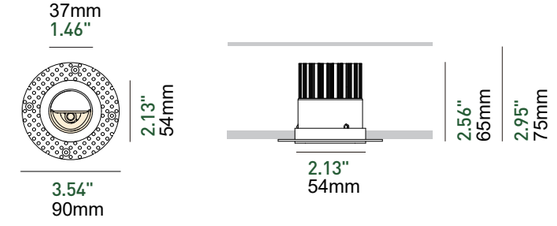

Trimless

White | Black

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

Accessories


Drivers in Junction Box



- **CMEM55** Triac
- **CVM55** 0-10V
- **UNM55** Universal(Triac&0-10V)

8W/10W/12W/15W

For 1






KIG-DWJ

Triac/0-10V/1-10V


Potentiometer/10V PWM 5 in 1

20W/40W/60W

For 1-4

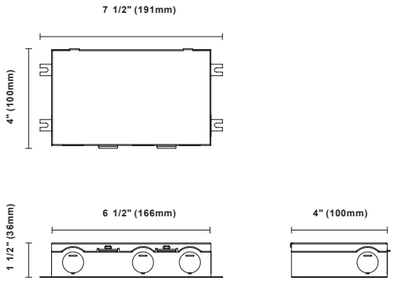

Rough-in Plate for New-Construction




BRKT-2R60A

For P.GEEK trim & trimless

Type: New construction plate

Cut out:

Round: Ø2"*2(Ø62mm)

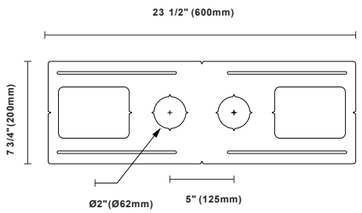

Remark

Tailored brackets are available with a reasonable surcharge, details as below,

- The customized brackets' dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests

For more information, please get in touch with XRZLux sales.

Brackets for New-Construction (4-legs)




NCP-SR3-R21


For P.GEEK trim & trimless

Cut out:


Round: Ø3"(Ø77mm)
Ø2"(Ø62mm)
Ø1"(Ø50mm)

Square: □3"(□77mm)

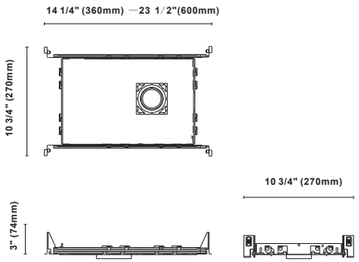

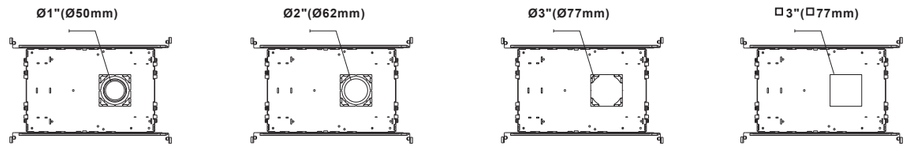

IC-Box for New-Construction (4-legs)




NCBX-SR3-R21


For P.GEEK trim & trimless

Cut out:


Round: Ø3"(Ø77mm)
Ø2"(Ø62mm)
Ø1"(Ø50mm)

Square: □3"(□77mm)

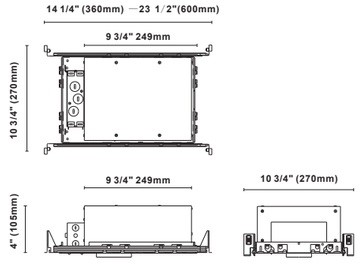


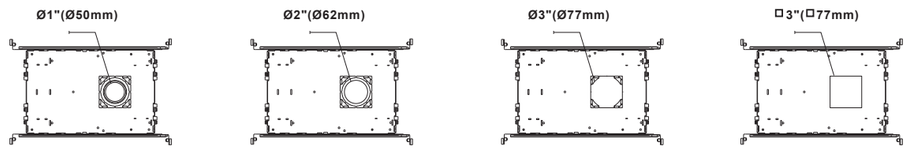


NON-IC Wire Diagram

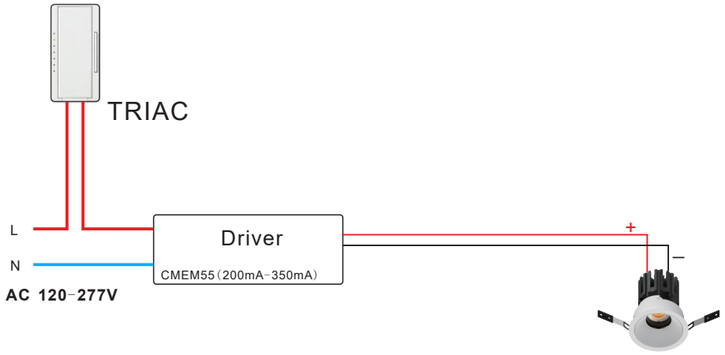


For 1

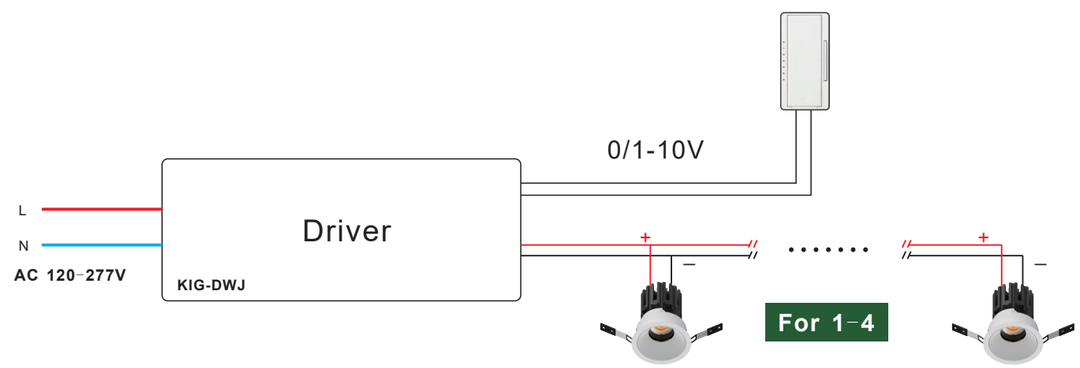


IC Rated Wire Diagram

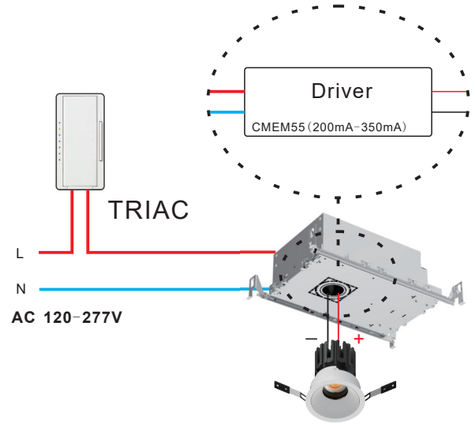

For 1

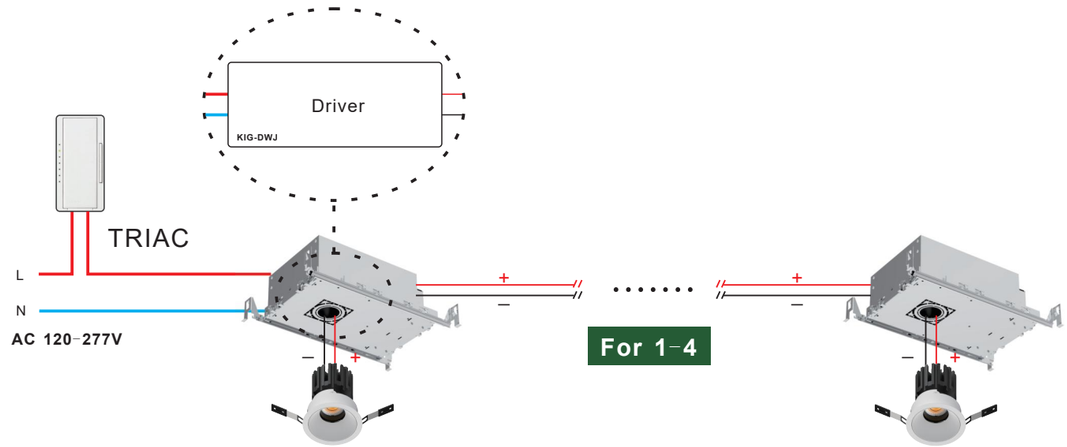

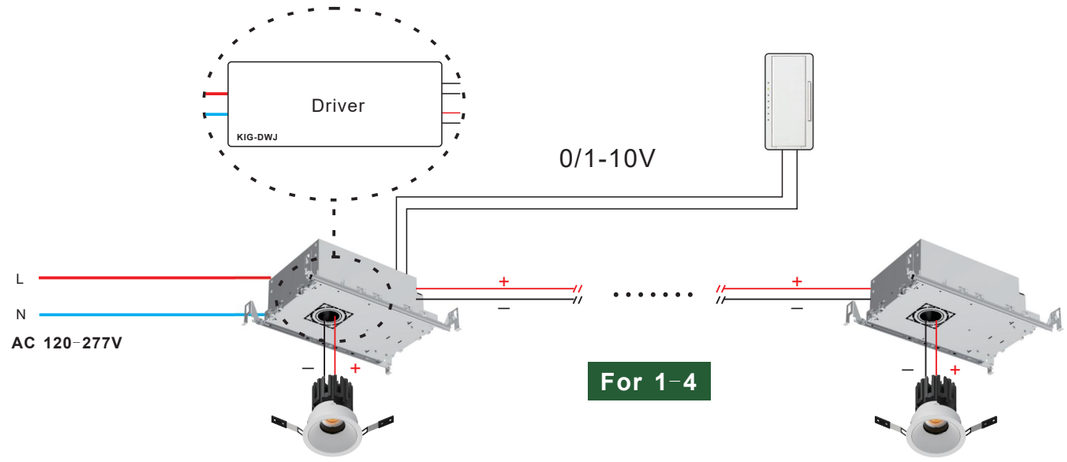

P.Geek 4"
1"



With Trim



Trimless



Adjustable
IP20



Fixed
IP44



Pinhole
IP20



GN45-R01QS




GN45-R44QS



GN45-R06QS



GN45-R01QT



GN45-R44QT



GN45-R06QT

P.Geek 1"


- P.Geek 1" is born to be small but powerful.
- Dia 1", but cold-forged heat sink improves power to 10W.
- The meticulous surface treatment brings delicate touching, adding an elegant feeling to the space.





1.65”
（42mm）

GN45-R01QT






0.71”
（18mm）

GN45-R06QT



GN45-R01QS





P.system	I (led)	Beam Angle	CRI	CCT	Lumens
10W	250mA	25°	97Ra	2700K 3000K 4000K	490.5 lm 543.0 lm 613.2 lm
10W	250mA	35°	90Ra	2700K 3000K 4000K	808.7 lm 861.2 lm 931.4 lm
10W	250mA	50°	90Ra	2700K 3000K 4000K	870.3 lm 922.8 lm 993.0 lm

Intertek | 5 Years Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	<13	52°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE | 1" (50mm) | Aluminum | Required Remote Driver*





With Trim



White | Black | Golden | Black Mirror

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

GN45-R01QT





P.system	I (led)	Beam Angle	CRI	CCT	Lumens
10W	250mA	25°	97Ra	2700K 3000K 4000K	490.5 lm 543.0 lm 613.2 lm
10W	250mA	35°	90Ra	2700K 3000K 4000K	808.7 lm 861.2 lm 931.4 lm
10W	250mA	50°	90Ra	2700K 3000K 4000K	870.3 lm 922.8 lm 993.0 lm

Intertek | 5 Years Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	<13	52°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE | 1" (50mm) | Aluminum | Required Remote Driver*





Trimless



White | Black | Golden | Black Mirror

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

GN45-R44QS




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
10W	250mA	25°	97Ra	2700K 3000K 4000K	490.5 lm 543.0 lm 613.2 lm
10W	250mA	35°	90Ra	2700K 3000K 4000K	808.7 lm 861.2 lm 931.4 lm
10W	250mA	50°	90Ra	2700K 3000K 4000K	870.3 lm 922.8 lm 993.0 lm

Intertek | 5 Year Warranty | FC | Damp Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	<13	52°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

1" (50mm) | Aluminum | Required Remote Driver*

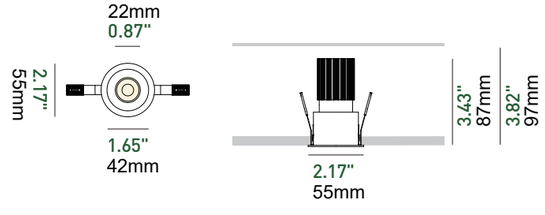

With Trim



White | Black | Golden | Black Mirror

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

GN45-R44QT




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
10W	250mA	25°	97Ra	2700K 3000K 4000K	490.5 lm 543.0 lm 613.2 lm
10W	250mA	35°	90Ra	2700K 3000K 4000K	808.7 lm 861.2 lm 931.4 lm
10W	250mA	50°	90Ra	2700K 3000K 4000K	870.3 lm 922.8 lm 993.0 lm

Intertek | 5 Year Warranty | FC | Damp Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	<13	52°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

1" (50mm) | Aluminum | Required Remote Driver*

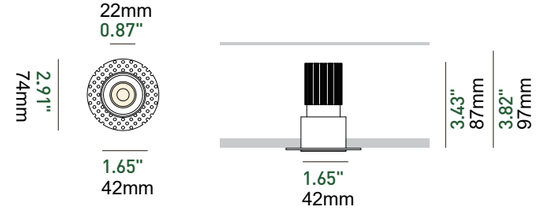

Trimless



White | Black | Golden | Black Mirror

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

GN45-R06QS




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
10W	250mA	25°	97Ra	2700K 3000K 4000K	304.5 lm 357.0 lm 427.2 lm
10W	250mA	35°	90Ra	2700K 3000K 4000K	527.1 lm 579.6 lm 649.8 lm
10W	250mA	50°	90Ra	2700K 3000K 4000K	587.5 lm 640.0 lm 710.2 lm

Intertek | 5 Year Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	<5	72°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

1" (50mm) | Aluminum | Required Remote Driver*

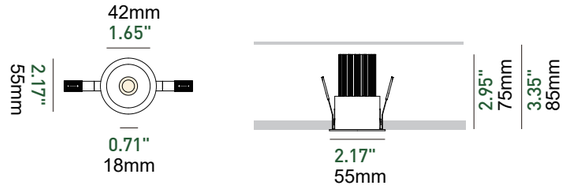


With Trim

White | Black

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

GN45-R06QT




P.system	I (led)	Beam Angle	CRI	CCT	Lumens
10W	250mA	25°	97Ra	2700K 3000K 4000K	304.5 lm 357.0 lm 427.2 lm
10W	250mA	35°	90Ra	2700K 3000K 4000K	527.1 lm 579.6 lm 649.8 lm
10W	250mA	50°	90Ra	2700K 3000K 4000K	587.5 lm 640.0 lm 710.2 lm

Intertek | 5 Year Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	<5	72°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

1" (50mm) | Aluminum | Required Remote Driver*

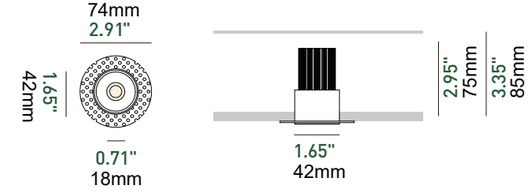

Trimless

White | Black

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

Accessories


Drivers in Junction Box



- **CMEM55** Triac
- **CVM55** 0-10V
- **UNM55** Universal(Triac&0-10V)

8W/10W/12W/15W

For 1



KIG-DWJ




Triac/0-10V/1-10V


Potentiometer/10V PWM 5 in 1

20W/40W/60W

For 1-6

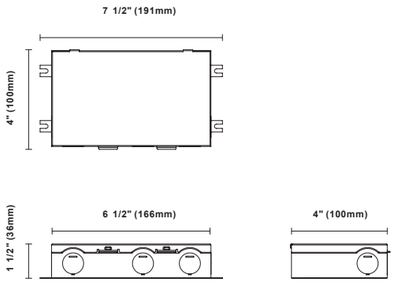

Rough-in Plate for New-Construction




BRKT-3R45A

For P.GEEK trim & trimless

Type: New construction plate

Cut out:

Round: Ø1"*3(Ø50mm)

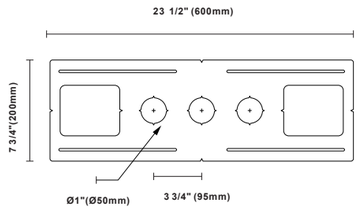

Remark

Tailored brackets are available with a reasonable surcharge, details as below,

- The customized brackets' dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests

For more information, please get in touch with XRZLux sales.

Brackets for New-Construction (4-legs)




NCP-SR3-R21


For P.GEEK trim & trimless

Cut out:


Round: Ø3"(Ø77mm)
Ø2"(Ø62mm)
Ø1"(Ø50mm)

Square: □3"(□77mm)

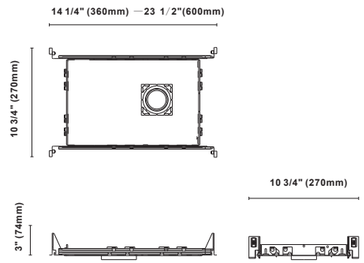

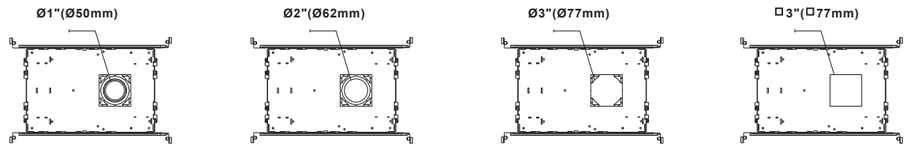

IC-Box for New-Construction (4-legs)




NCBX-SR3-R21


For P.GEEK trim & trimless

Cut out:


Round: Ø3"(Ø77mm)
Ø2"(Ø62mm)
Ø1"(Ø50mm)

Square: □3"(□77mm)

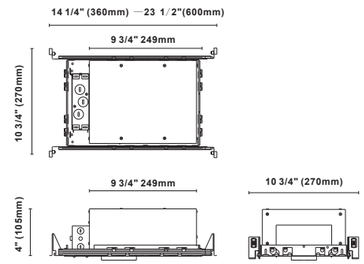


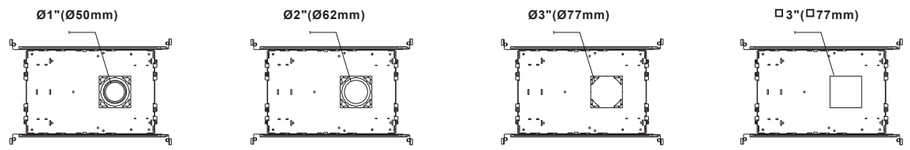


NON-IC Wire Diagram

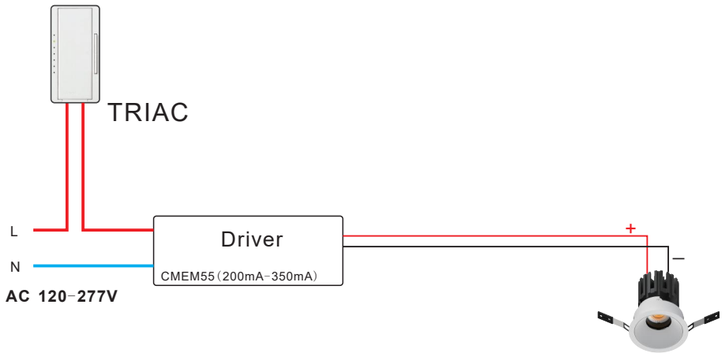


For 1

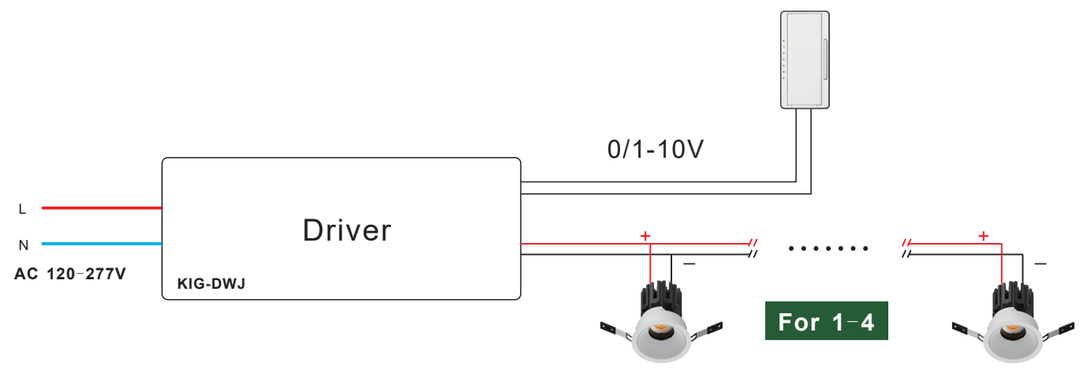


IC Rated Wire Diagram

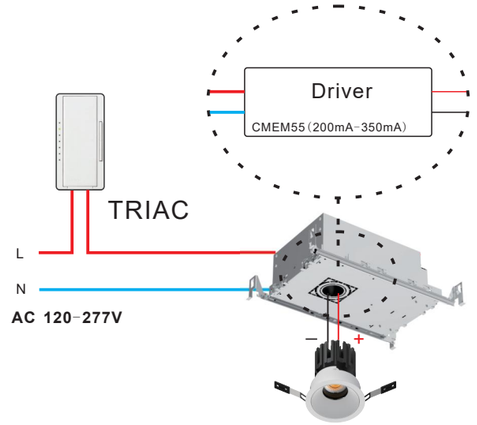

For 1

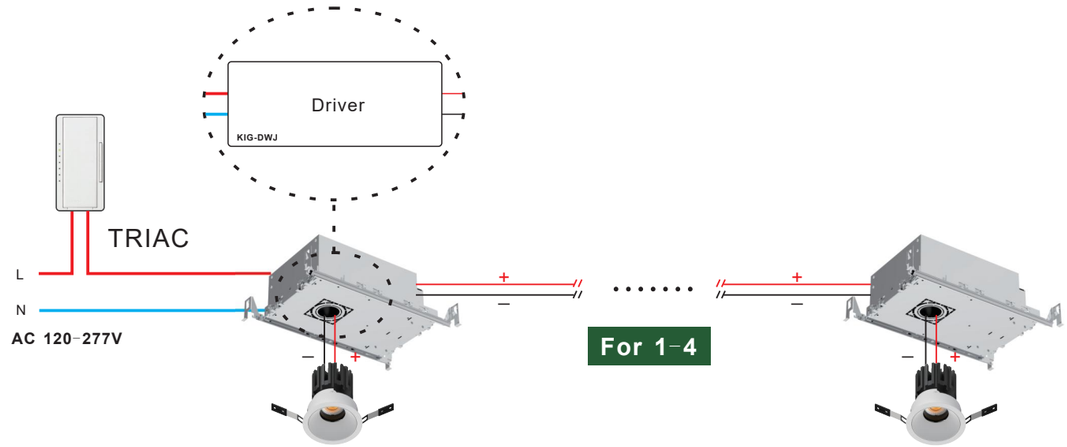


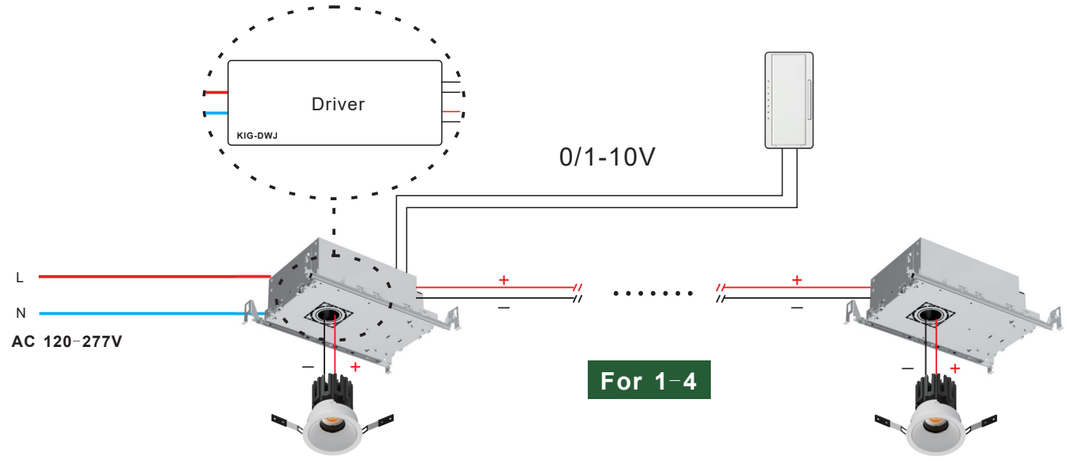

P.Geek 0”



LN75-R25QS




P.system	I(led)	Beam Angle	CRI	CCT	Lumens
6W	120mA	25°	90Ra	2700K 3000K 4000K	174.0 lm 192.0 lm 210.0 lm
6W	120mA	20°×50°	90Ra	2700K 3000K 4000K	174.0 lm 192.0 lm 210.0 lm

Intertek | 5 Year Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	＜10	38°

MacAdam Step 3 | Non-IC Rated | USE

0.98" (25mm) | Aluminum | Required Remote Driver*

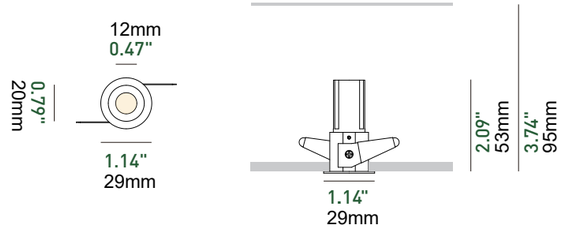

With Trim



White Black


Housing Options



Rough-in Plate Bracket IC Box

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

LN75-R25QT




P.system	I(led)	Beam Angle	CRI	CCT	Lumens
6W	120mA	25°	90Ra	2700K 3000K 4000K	174.0 lm 192.0 lm 210.0 lm
6W	120mA	20°×50°	90Ra	2700K 3000K 4000K	174.0 lm 192.0 lm 210.0 lm

Intertek | 5 Year Warranty | FC | Dry Location | Fast Connect


Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	＜10	38°

MacAdam Step 3 | Non-IC Rated | USE

1.14" (29mm) | Aluminum | Required Remote Driver*

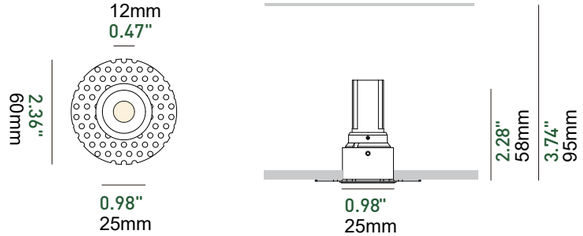

Trimless



White Black

Housing Options



Rough-in Plate Bracket IC Box

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

LN75-R26QS




P.system	I(led)	Beam Angle	CRI	CCT	Lumens
8W	200mA	25°	97Ra	2700K 3000K 4000K	381.9 lm 434.4 lm 544.9 lm
8W	200mA	35°	90Ra	2700K 3000K 4000K	636.0 lm 688.5 lm 799.0 lm

Intertek | 5 Year Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜9	31°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

0.98" (25mm) | Aluminum | Required Remote Driver*

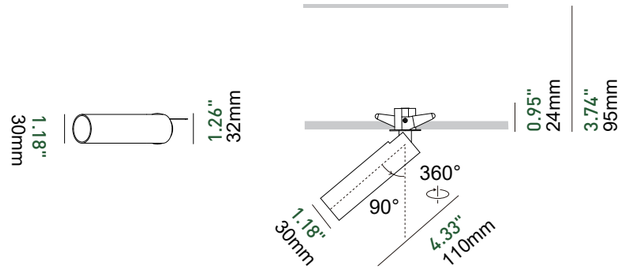

With Trim



White | Black | Golden

Housing Options



Rough-in Plate | Bracket | IC Box

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

LN75-R26QT




P.system	I(led)	Beam Angle	CRI	CCT	Lumens
8W	200mA	25°	97Ra	2700K 3000K 4000K	381.9 lm 434.4 lm 544.9 lm
8W	200mA	35°	90Ra	2700K 3000K 4000K	636.0 lm 688.5 lm 799.0 lm

Intertek | 5 Year Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜9	31°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

1.14" (29mm) | Aluminum | Required Remote Driver*

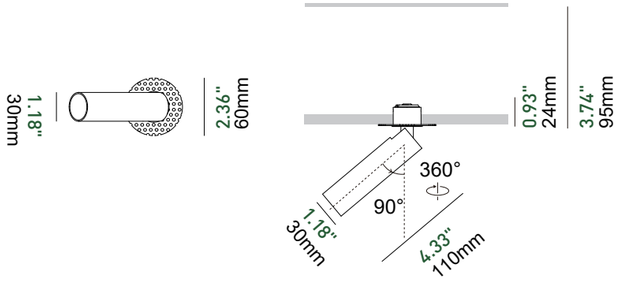


Trimless



White | Black | Golden

Housing Options



Rough-in Plate | Bracket | IC Box

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

Linox

2026 New series of HIGH POWER

GK75-R20QS




P.system	I(led)	Beam Angle	CRI	CCT	Lumens
20W	500mA	25°	90Ra	2700K 3000K 4000K	1460.0 lm 1520.0 lm 1640.0 lm
20W	500mA	35°	90Ra	2700K 3000K 4000K	1357.0 lm 1417.0 lm 1537.0 lm
20W	500mA	50°	90Ra	2700K 3000K 4000K	1188.0 lm 1248.0 lm 1368.0 lm

Intertek | 5 Years Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	＜13	50°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

3" (75mm) | Aluminum | Required Remote Driver*

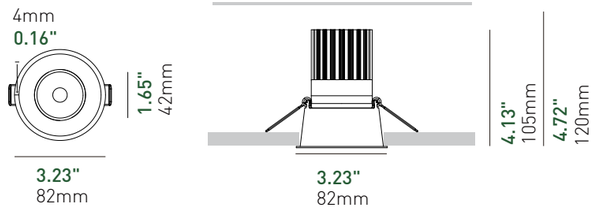

With Trim



White Black

Housing Options



Rough-in Plate Bracket IC Box

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

GK75-R21QS




P.system	I(led)	Beam Angle	CRI	CCT	Lumens
20W	500mA	25°	90Ra	2700K 3000K 4000K	1460.0 lm 1520.0 lm 1640.0 lm
20W	500mA	35°	90Ra	2700K 3000K 4000K	1357.0 lm 1417.0 lm 1537.0 lm
20W	500mA	50°	90Ra	2700K 3000K 4000K	1188.0 lm 1248.0 lm 1368.0 lm

Intertek | 5 Years Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	＜13	56°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

3" (75mm) | Aluminum | Required Remote Driver*

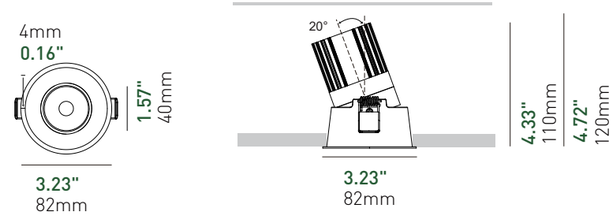


With Trim



White Black

Housing Options



Rough-in Plate Bracket IC Box

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

Damp Location IP65 Rated





6.22in



5.35in



3.94in

LN95-R84QS 4" Round IP65

	P.system	I(led)	Beam Angle	CRI	CCT	Lumens
*Insulation materials contact the IC housing,and the IC housing covers the light.	20W	500mA	30°	90Ra	2700K 3000K 4000K	1603.0 lm 1683.0 lm 1843.0 lm
	20W	500mA	55°	90Ra	2700K 3000K 4000K	1883.0 lm 1963.0 lm 2123.0 lm


	P.system	I(led)	Beam Angle	CRI	CCT	Lumens
*Insulation materials contact the light directly.	10W	250mA	30°	90Ra	2700K 3000K 4000K	802.0 lm 842.0 lm 922.0 lm
	10W	250mA	55°	90Ra	2700K 3000K 4000K	942.0 lm 982.0 lm 1062.0 lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	<13	48°

MacAdam Step 3 | IC Rated | ETL Intertek | FC | Fast Connect | Damp Location

3.54" (90mm) | Aluminum | Required Remote Driver*

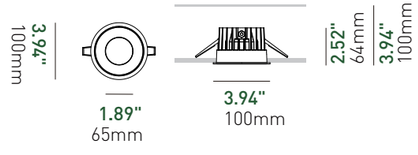

With Trim

White Black

Golden Silver

Housing Options

Rough-in Plate Bracket IC Box

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

5" Round IP65 LN12-R84QS

	P.system	I(led)	Beam Angle	CRI	CCT	Lumens
*Insulation materials contact the IC housing,and the IC housing covers the light.	30W	750mA	30°	90Ra	2700K 3000K 4000K	2549.0 lm 2669.0 lm 2909.0 lm
	30W	750mA	55°	90Ra	2700K 3000K 4000K	2652.0 lm 2772.0 lm 3012.0 lm


	P.system	I(led)	Beam Angle	CRI	CCT	Lumens
*Insulation materials contact the light directly.	15W	350mA	30°	90Ra	2700K 3000K 4000K	1275.0 lm 1335.0 lm 1455.0 lm
	15W	350mA	55°	90Ra	2700K 3000K 4000K	1326.0 lm 1386.0 lm 1506.0 lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	<13	48°

MacAdam Step 3 | IC Rated | ETL Intertek | FC | Fast Connect | Damp Location

4.92" (125mm) | Aluminum | Required Remote Driver*

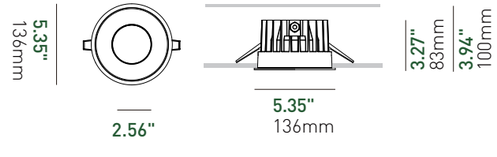

With Trim

White Black

Golden Silver

Housing Options

Rough-in Plate Bracket IC Box

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

LN14-R84QS 6" Round IP65

	P.system	I(led)	Beam Angle	CRI	CCT	Lumens
*Insulation materials contact the IC housing,and the IC housing covers the light.	40W	900mA	30°	90Ra	2700K 3000K 4000K	3318.0 lm 3478.0 lm 3798.0 lm
	40W	900mA	55°	90Ra	2700K 3000K 4000K	3378.0 lm 3538.0 lm 3858.0 lm


	P.system	I(led)	Beam Angle	CRI	CCT	Lumens
*Insulation materials contact the light directly.	20W	500mA	30°	90Ra	2700K 3000K 4000K	1659.0 lm 1739.0 lm 1899.0 lm
	20W	500mA	55°	90Ra	2700K 3000K 4000K	1689.0 lm 1769.0 lm 1929.0 lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	<13	48°

MacAdam Step 3 | IC Rated | ETL Intertek | FC | Fast Connect | Damp Location

5.71" (145mm) | Aluminum | Required Remote Driver*



D1:min.**0.02"**(0.5mm)
D2:max.**0.98"** (25mm)

With Trim

White | Black | Golden | Silver

Housing Options

Rough-in Plate | Bracket | IC Box

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI





3.94in




5.35in




6.22in

Damp Location IP65 Rated

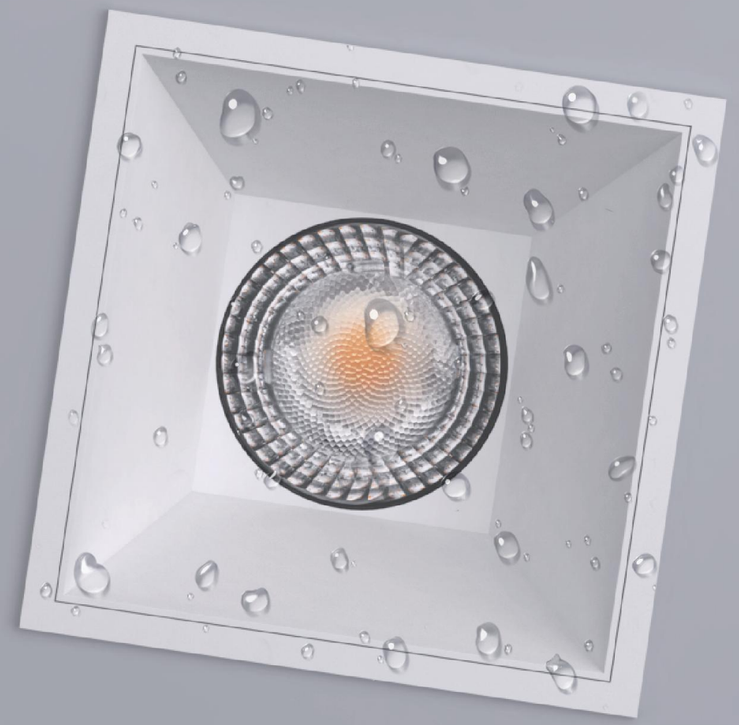


LN95-R91QS 4" Square IP65

*Insulation materials contact the IC housing,and the IC housing covers the light.




P.system	I(led)	Beam Angle	CRI	CCT	Lumens
20W	500mA	30°	90Ra	2700K 3000K 4000K	1603.0 lm 1683.0 lm 1843.0 lm
20W	500mA	55°	90Ra	2700K 3000K 4000K	1883.0 lm 1963.0 lm 2123.0 lm

*Insulation materials contact the light directly.




P.system	I(led)	Beam Angle	CRI	CCT	Lumens
10W	250mA	30°	90Ra	2700K 3000K 4000K	802.0 lm 842.0 lm 922.0 lm
10W	250mA	55°	90Ra	2700K 3000K 4000K	942.0 lm 982.0 lm 1062.0 lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	＜13	48°

3.54"*3.54" (90*90mm) | Aluminum | Required Remote Driver*

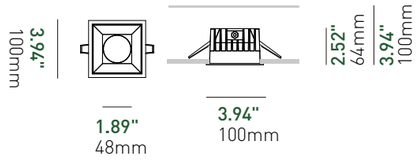

With Trim




Housing Options



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI


5" Square IP65 LN12-R91QS

*Insulation materials contact the IC housing,and the IC housing covers the light.



P.system	I(led)	Beam Angle	CRI	CCT	Lumens
30W	750mA	30°	90Ra	2700K 3000K 4000K	2549.0 lm 2669.0 lm 2909.0 lm
30W	750mA	55°	90Ra	2700K 3000K 4000K	2652.0 lm 2772.0 lm 3012.0 lm

*Insulation materials contact the light directly.




P.system	I(led)	Beam Angle	CRI	CCT	Lumens
15W	350mA	30°	90Ra	2700K 3000K 4000K	1275.0 lm 1335.0 lm 1455.0 lm
15W	350mA	55°	90Ra	2700K 3000K 4000K	1326.0 lm 1386.0 lm 1506.0 lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	＜13	48°


4.92"*4.92" (125*125mm) | Aluminum | Required Remote Driver*

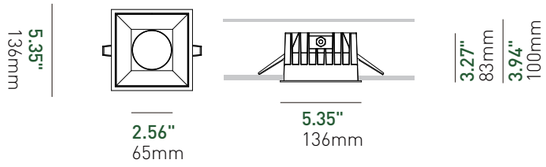

With Trim




Housing Options



Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI


LN14-R91QS 6" Square IP65

*Insulation materials contact the IC housing,and the IC housing covers the light.



P.system	I(led)	Beam Angle	CRI	CCT	Lumens
40W	900mA	30°	90Ra	2700K 3000K 4000K	3318.0 lm 3478.0 lm 3798.0 lm
40W	900mA	55°	90Ra	2700K 3000K 4000K	3378.0 lm 3538.0 lm 3858.0 lm

*Insulation materials contact the light directly.




P.system	I(led)	Beam Angle	CRI	CCT	Lumens
20W	500mA	30°	90Ra	2700K 3000K 4000K	1659.0 lm 1739.0 lm 1899.0 lm
20W	500mA	55°	90Ra	2700K 3000K 4000K	1689.0 lm 1769.0 lm 1929.0 lm



Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	＜13	48°

MacAdam Step 3 | IC Rated | Intertek | FC | Fast Connect | Damp Location

5.71"*5.71" (145*145mm) | Aluminum | Required Remote Driver*

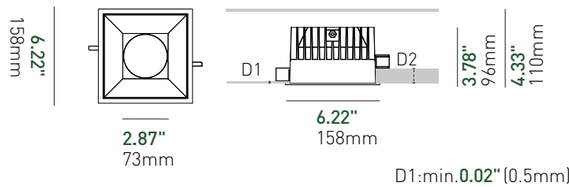

D1:min.**0.02"** (0.5mm)
D2:max.**0.98"** (25mm)

With Trim



White | Black | Golden | Silver

Housing Options



Rough-in Plate | Bracket | IC Box

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI






Flood Downlight

LN95-R00QS


P.system	I(led)	Beam Angle	CRI	CCT	Lumens
15W	350mA	/	90Ra	2700K 3000K 4000K	1017.0 lm 1077.0 lm 1197.0 lm


*Insulation materials contact the IC housing,and the IC housing covers the light.



P.system	I(led)	Beam Angle	CRI	CCT	Lumens
8W	200mA	/	90Ra	2700K 3000K 4000K	542.0 lm 574.0 lm 638.0 lm

*Insulation materials contact the light directly.






Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	/	/

MacAdam Step 3 | IC Rated | Intertek | FC | Fast Connect | Dry Location | USE

3.54"-3.74" (90-95mm) | Aluminum | Required Remote Driver*

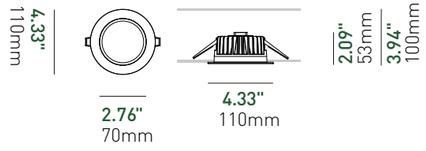

With Trim

White

Housing Options


Rough-in Plate | Bracket | IC Box

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

LN12-R00QS


P.system	I(led)	Beam Angle	CRI	CCT	Lumens
20W	500mA	/	90Ra	2700K 3000K 4000K	1615.0 lm 1695.0 lm 1855.0 lm


*Insulation materials contact the IC housing,and the IC housing covers the light.



P.system	I(led)	Beam Angle	CRI	CCT	Lumens
10W	250mA	/	90Ra	2700K 3000K 4000K	808 lm 848 lm 928 lm

*Insulation materials contact the light directly.






Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra	/	/

MacAdam Step 3 | IC Rated | Intertek | FC | Fast Connect | Dry Location | USE

4.72"-5.12" (120-130mm) | Aluminum | Required Remote Driver*

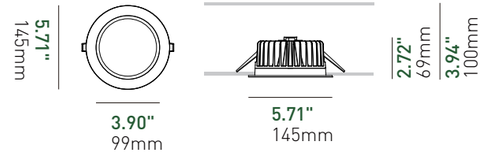

With Trim

White

Housing Options

Rough-in Plate | Bracket | IC Box

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

Gypsum 2”



SG-S31QT




P.system	I(led)	Beam Angle	CRI	CCT	Lumens
15W	350mA	25°	97Ra	2700K 3000K 4000K	762.0 lm 814.5 lm 925.0 lm
15W	350mA	35°	90Ra	2700K 3000K 4000K	1239.3 lm 1291.8 lm 1402.3 lm
15W	350mA	50°	90Ra	2700K 3000K 4000K	1331.7 lm 1384.2 lm 1494.7 lm


Intertek | 5 Years Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜13	50°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

4.02"*4.02" (102*102mm) | Aluminum | Required Remote Driver*



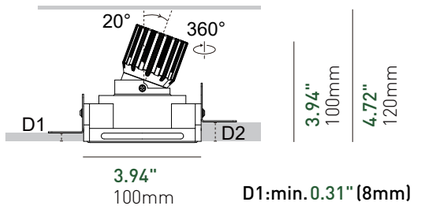

D1:min.0.31"(8mm)
D2:max.0.75" (19mm)

Trimless



White Black

Housing Options



Rough-in Plate Bracket IC Box

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI



SG-S33QT




P.system	I(led)	Beam Angle	CRI	CCT	Lumens
10W	250mA	25°	97Ra	2700K 3000K 4000K	490.5 lm 543.0 lm 653.5 lm
10W	250mA	35°	90Ra	2700K 3000K 4000K	808.7 lm 861.2 lm 971.7 lm

Intertek | 5 Years Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜13	50°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

4.02"*4.02" (102*102mm) | Aluminum | Required Remote Driver*

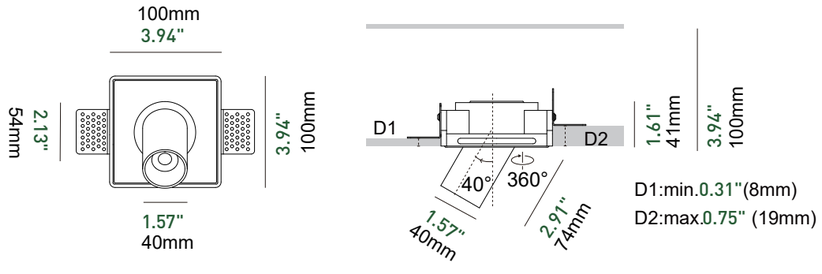

Trimless



White | Black | White+Black

Housing Options



Rough-in Plate | Bracket | IC Box

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

SG-S36QT




P.system	I(led)	Beam Angle	CRI	CCT	Lumens
6W	150mA	25°	97Ra	2700K 3000K 4000K	304.8 lm 325.8 lm 370.0 lm
6W	150mA	35°	90Ra	2700K 3000K 4000K	485.2 lm 516.7 lm 583.0 lm

Intertek | 5 Years Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜9	47°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

4.02"*4.02" (102*102mm) | Aluminum | Required Remote Driver*

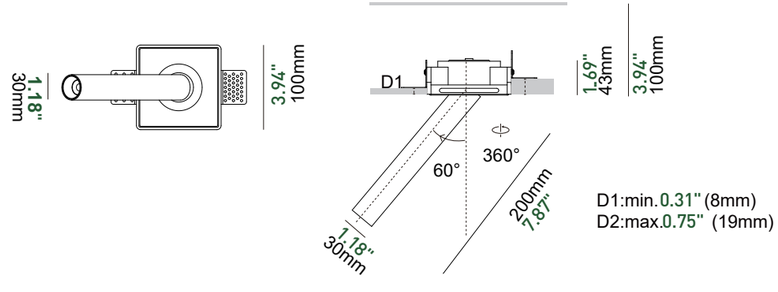

Trimless



White | Black | White+Black

Housing Options



Rough-in Plate | Bracket | IC Box

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI



SG-S10QT




P.system	I(led)	Beam Angle	CRI	CCT	Lumens
15W	350mA	25°	97Ra	2700K 3000K 4000K	762.0 lm 814.5 lm 925.0 lm
15W	350mA	60°	90Ra	2700K 3000K 4000K	1331.7 lm 1384.2 lm 1494.7 lm

Intertek | 5 Year Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC36V	90Ra/97Ra	＜15	39°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

4.84"*4.84" (123*123mm) | Aluminum | Required Remote Driver*

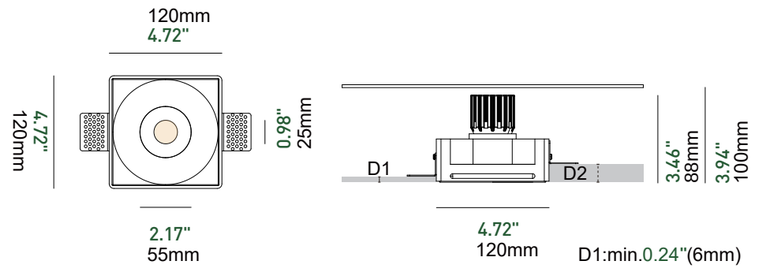

D1:min.0.24"(6mm)
D2:max.0.71"(18mm)

Trimless



White

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI




Gypsum · Concave


Split Design

LED COB Light Source

Cold Forged Pure Alu. Heat Sink

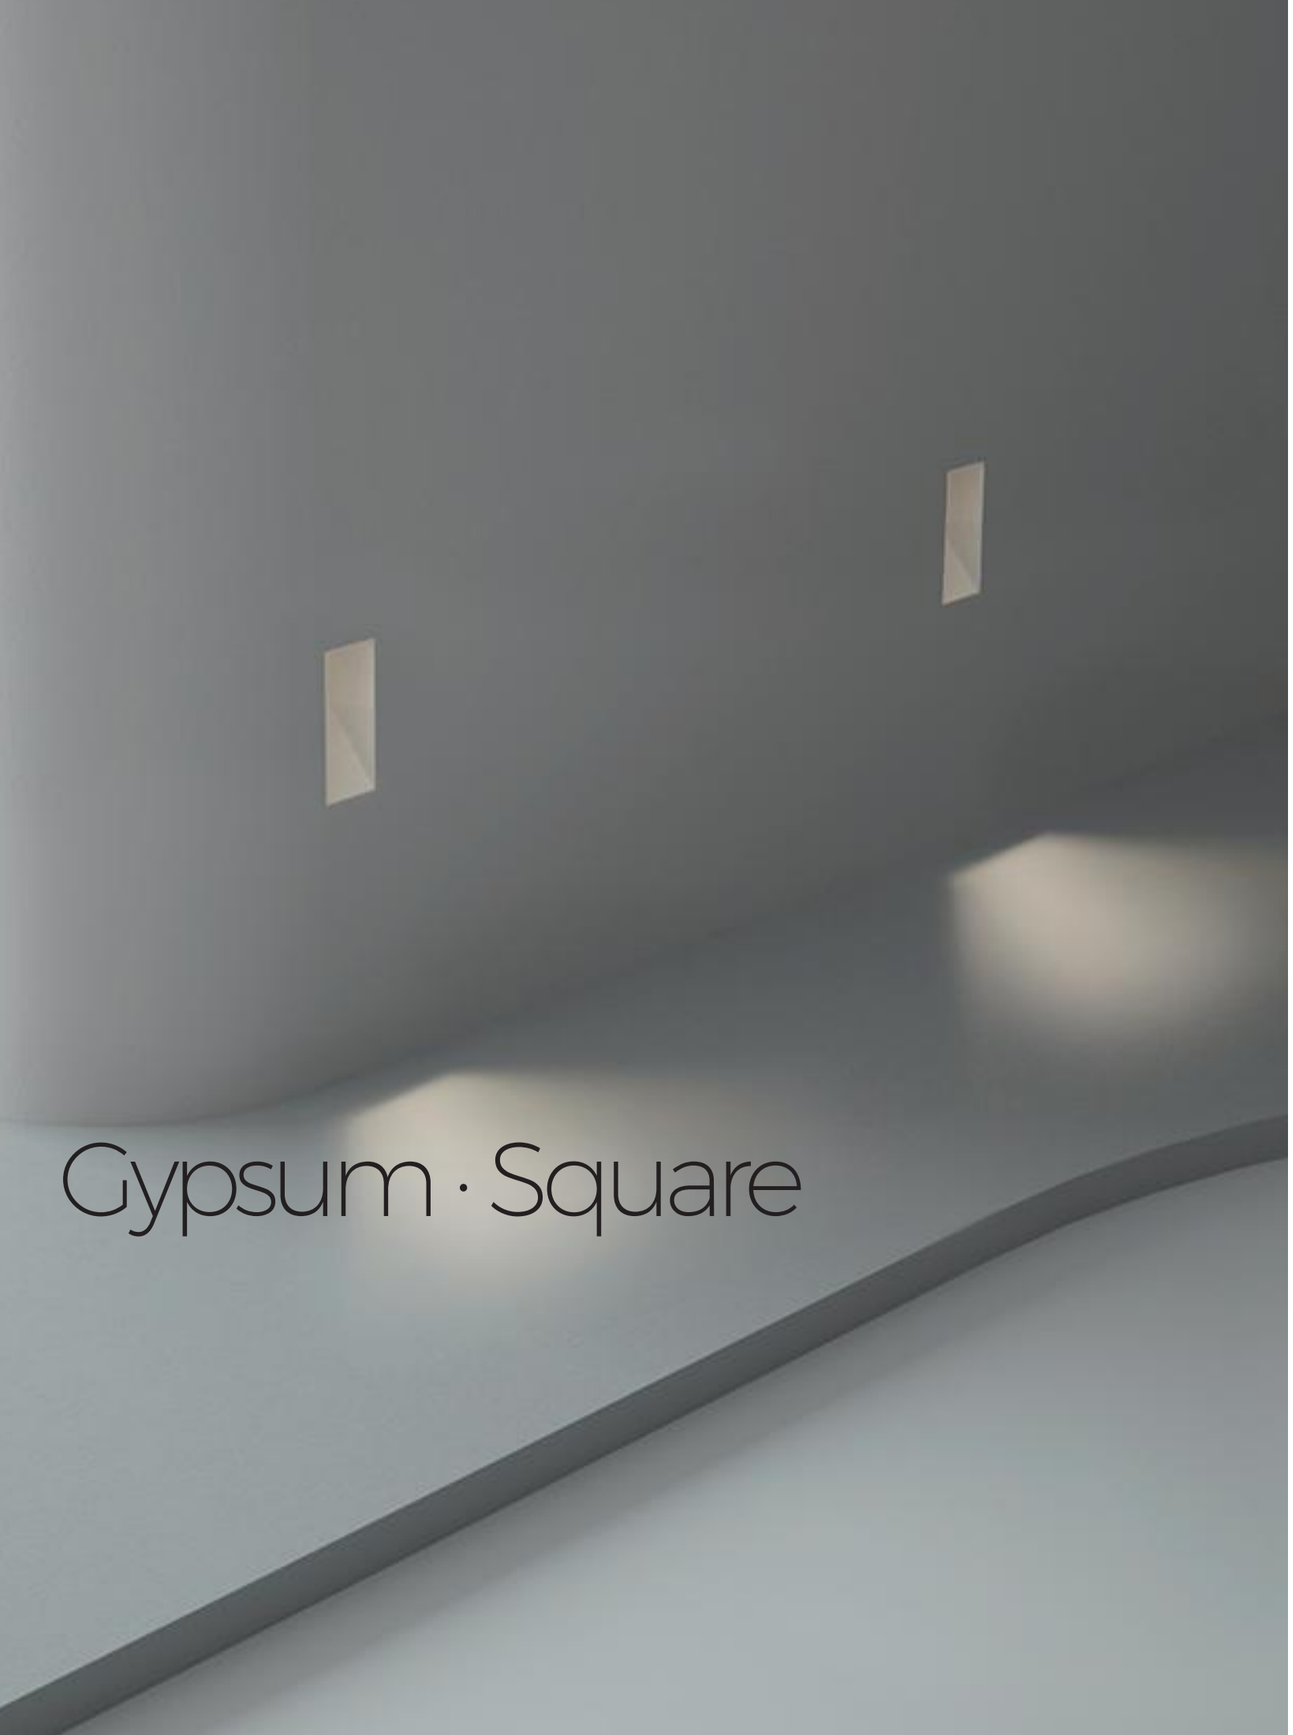

SG-S05QT




P.system	I(led)	Beam Angle	CRI	CCT	Lumens
3W	350mA	50°	95Ra	2700K 3000K 4000K	216.0 lm 243.0 lm 270.0 lm

5 YEARS Warranty | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC3V	95Ra	/	/

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

L7.60""*W2.87""*D2.28" (L193*W73*D58mm) | Aluminum | Required Remote Driver*

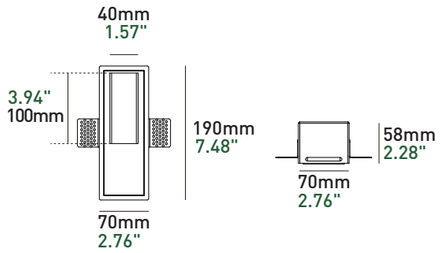


Trimless



White

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

SG-S04QT




P.system	I(led)	Beam Angle	CRI	CCT	Lumens
3W	350mA	50°	95Ra	2700K 3000K 4000K	216.0 lm 243.0 lm 270.0 lm

5 YEARS Warranty | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC3V	95Ra	/	/

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

L7.36"*W6.02"*D2.28" (L187*W153*D58mm) | Aluminum | Required Remote Driver*

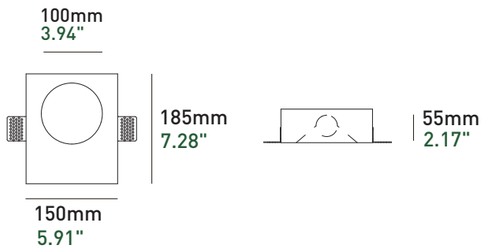


Trimless




White

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

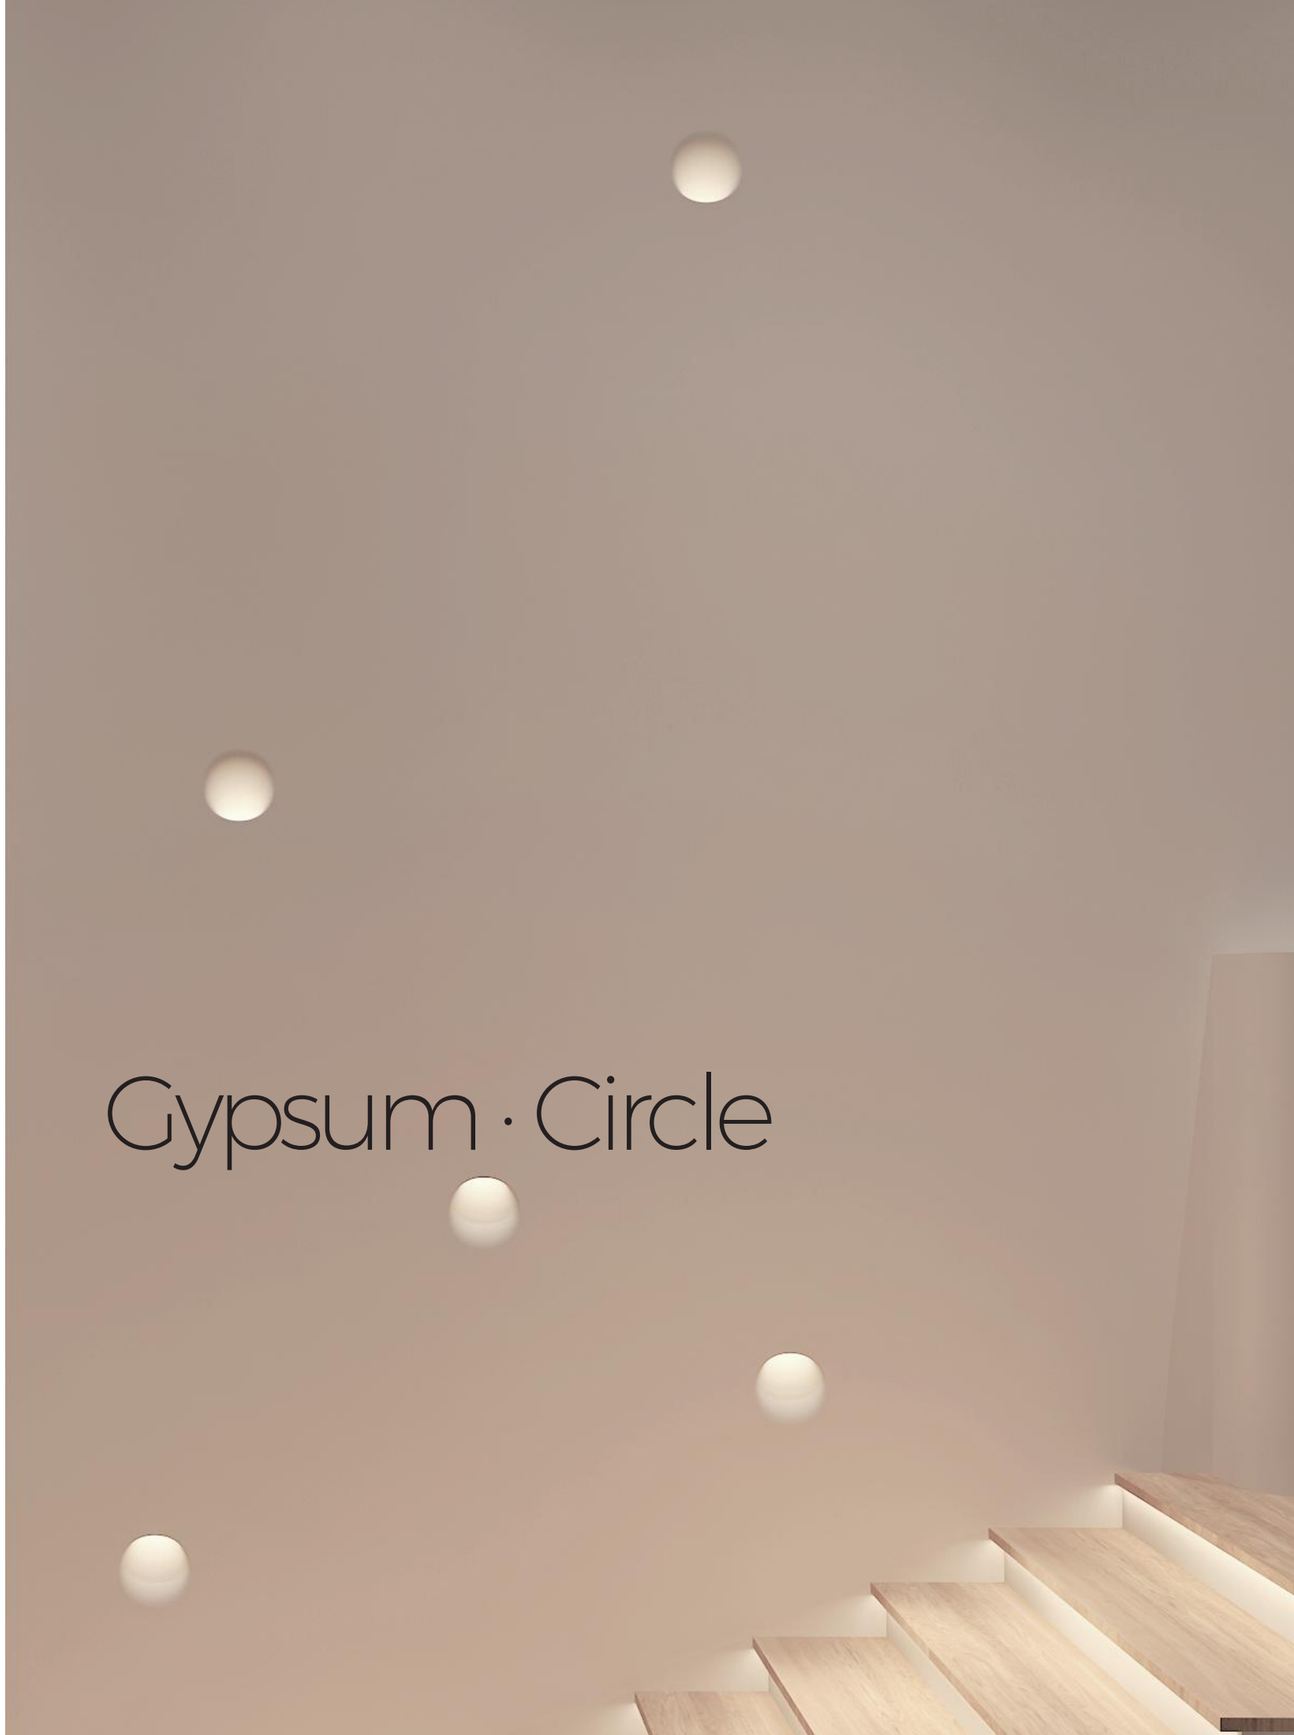

HIGH Grille Series

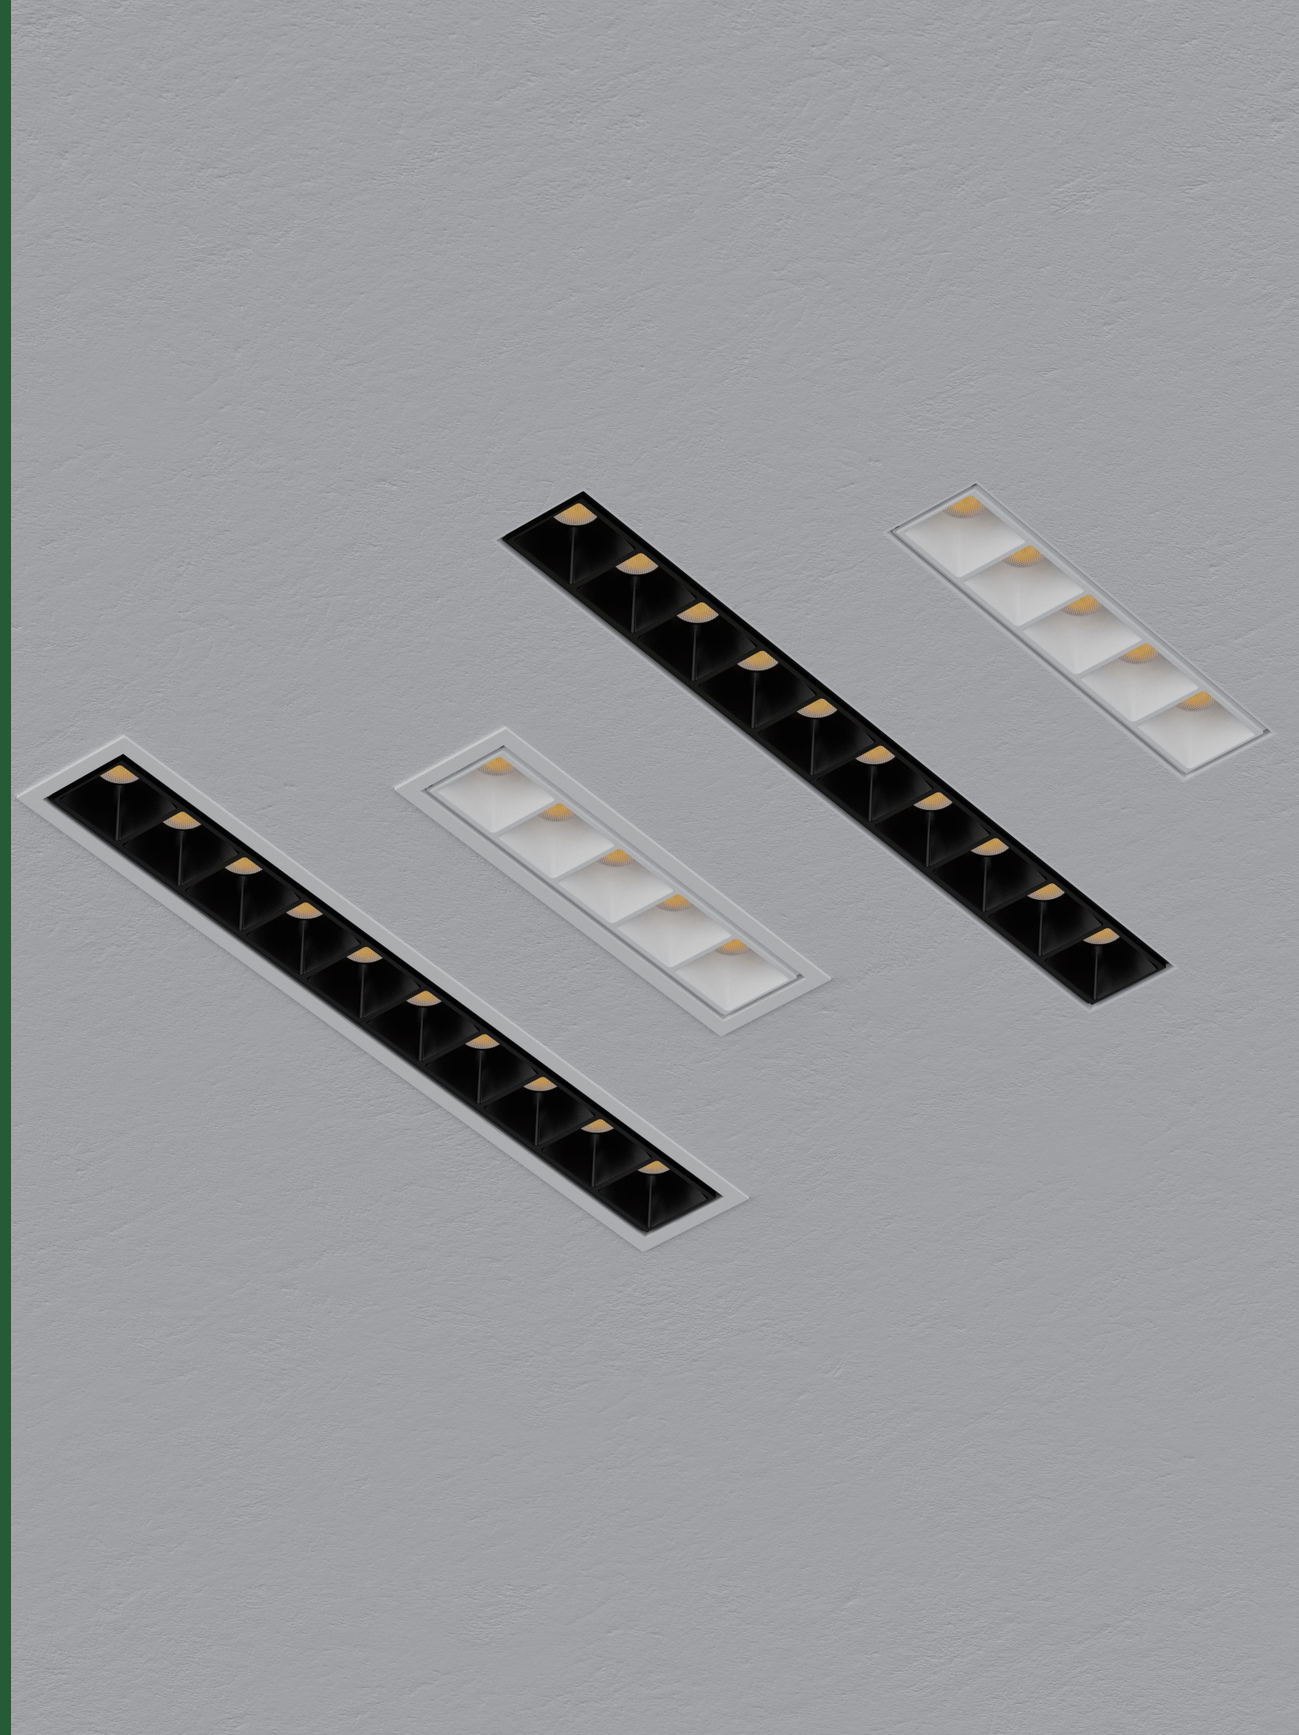

HG-S05QS




P.system	I(led)	Beam Angle	CRI	CCT	Lumens
12W	750mA	50°	95Ra	2700K 3000K 4000K	660.0 lm 708.0 lm 804.0 lm


Intertek | 5 YEARS Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC15V	95Ra	＜13	50°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

6.42"*1.73" (163*44mm) | Aluminum | Required Remote Driver*





With Trim



White | Black


Housing Options



Rough-in Plate | Bracket | IC Box

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

HG-S05QT




P.system	I(led)	Beam Angle	CRI	CCT	Lumens
12W	750mA	50°	95Ra	2700K 3000K 4000K	660.0 lm 708.0 lm 804.0 lm


Intertek | 5 YEARS Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC15V	95Ra	＜13	50°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

6.42"*1.73" (163*44mm) | Aluminum | Required Remote Driver*



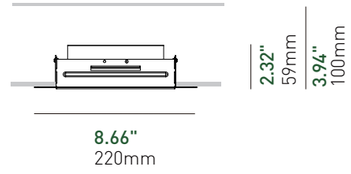

Trimless



White | Black


Housing Options



Rough-in Plate | Bracket | IC Box

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

HG-S10QS




P.system	I(led)	Beam Angle	CRI	CCT	Lumens
24W	750mA	50°	95Ra	2700K 3000K 4000K	1320.0 lm 1416.0 lm 1608.0 lm

Intertek | 5 YEARS Warranty | FC | Dry Location | Fast Connect


Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC30V	95Ra	＜9	47°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

12.56"*1.73" (319*44mm) | Aluminum | Required Remote Driver*

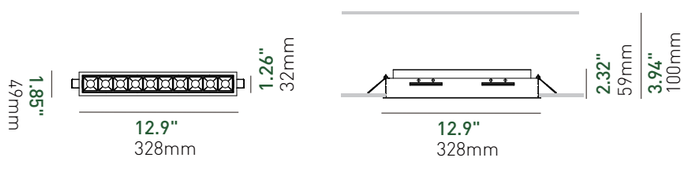


With Trim



White Black

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

HG-S10QT




P.system	I(led)	Beam Angle	CRI	CCT	Lumens
24W	750mA	50°	95Ra	2700K 3000K 4000K	1320.0 lm 1416.0 lm 1608.0 lm

Intertek | 5 YEARS Warranty | FC | Dry Location | Fast Connect

Light Source	Input Voltage	CRI	UGR	Shielding Angle
LED COB	DC30V	95Ra	＜9	47°

MacAdam Step 3 | Non-IC Rated | bridgelux 60,000hrsL90B10 | USE

12.56"*1.73" (319*44mm) | Aluminum | Required Remote Driver*

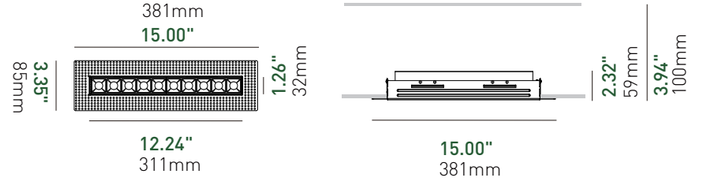

Trimless



White Black

Driver: 120-277Vac ON-OFF | TRIAC | 0/1-10V | DALI

Accessories


Drivers in Junction Box



- **CMEM75** Triac
- **CVM75** 0-10V
- **CDM75** Dali
- **UNM75** Universal(Triac&0-10V)

15W/20W/25W/30W/40W

For 1

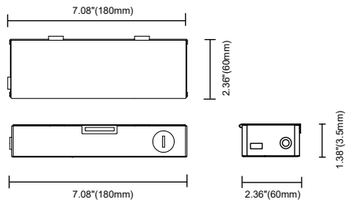




KIG-DWJ

Triac/0-10V/1-10V

Potentiometer/10V PWM 5 in 1

20W/40W/60W

For 1-4

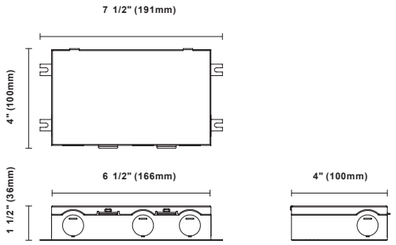

Rough-in Plate for New-Construction




BRKT-XRXXA

Type: New construction plate

Cut out:

Round: ØX"*X(ØXXmm)

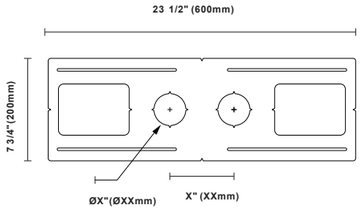

Remark

Tailored brackets are available with a reasonable surcharge, details as below,
- The customized brackets' dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests

For more information, please get in touch with XRZLux sales.

"X" stands for a number

Brackets for New-Construction (4-legs)




NCP-SRXX

Cut out:


Round: ØX"(ØXXmm)

Square: □X"(□XXmm)

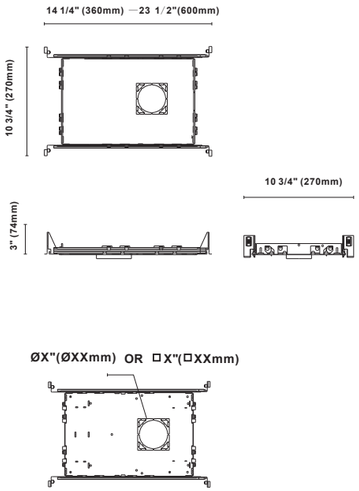

"X" stands for a number

IC-Box for New-Construction (4-legs)




NCBX-SRXX

Cut out:

Round: ØX"(ØXXmm)

Square: □X"(□XXmm)

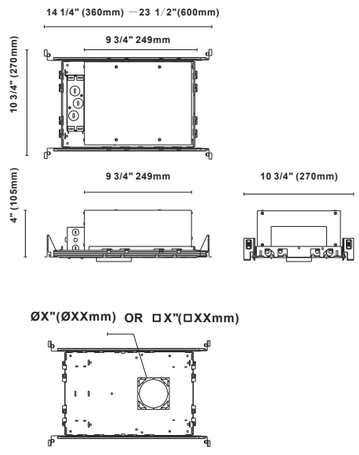

"X" stands for a number

Magnetic Track System

M19





Magnetic Track System

M19





1.5M/2M
M19H
Hanging



1.5M/2M
M19E
Hanging



1.5M/2M
M19H
Surface Mounted




1.5M/2M
M19E
Surface Mounted





1.5M/2M
M19A
Embedded





1.5M/2M
M19T
Embedded




















M19H Surface-mounted/Suspended Track

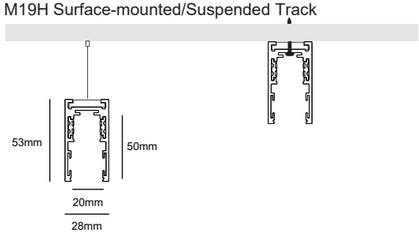


M19E Surface-mounted/Suspended Track

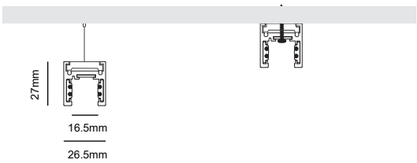




M19A Trimless Recessed Track








M19T Trimless Recessed Track



M19H

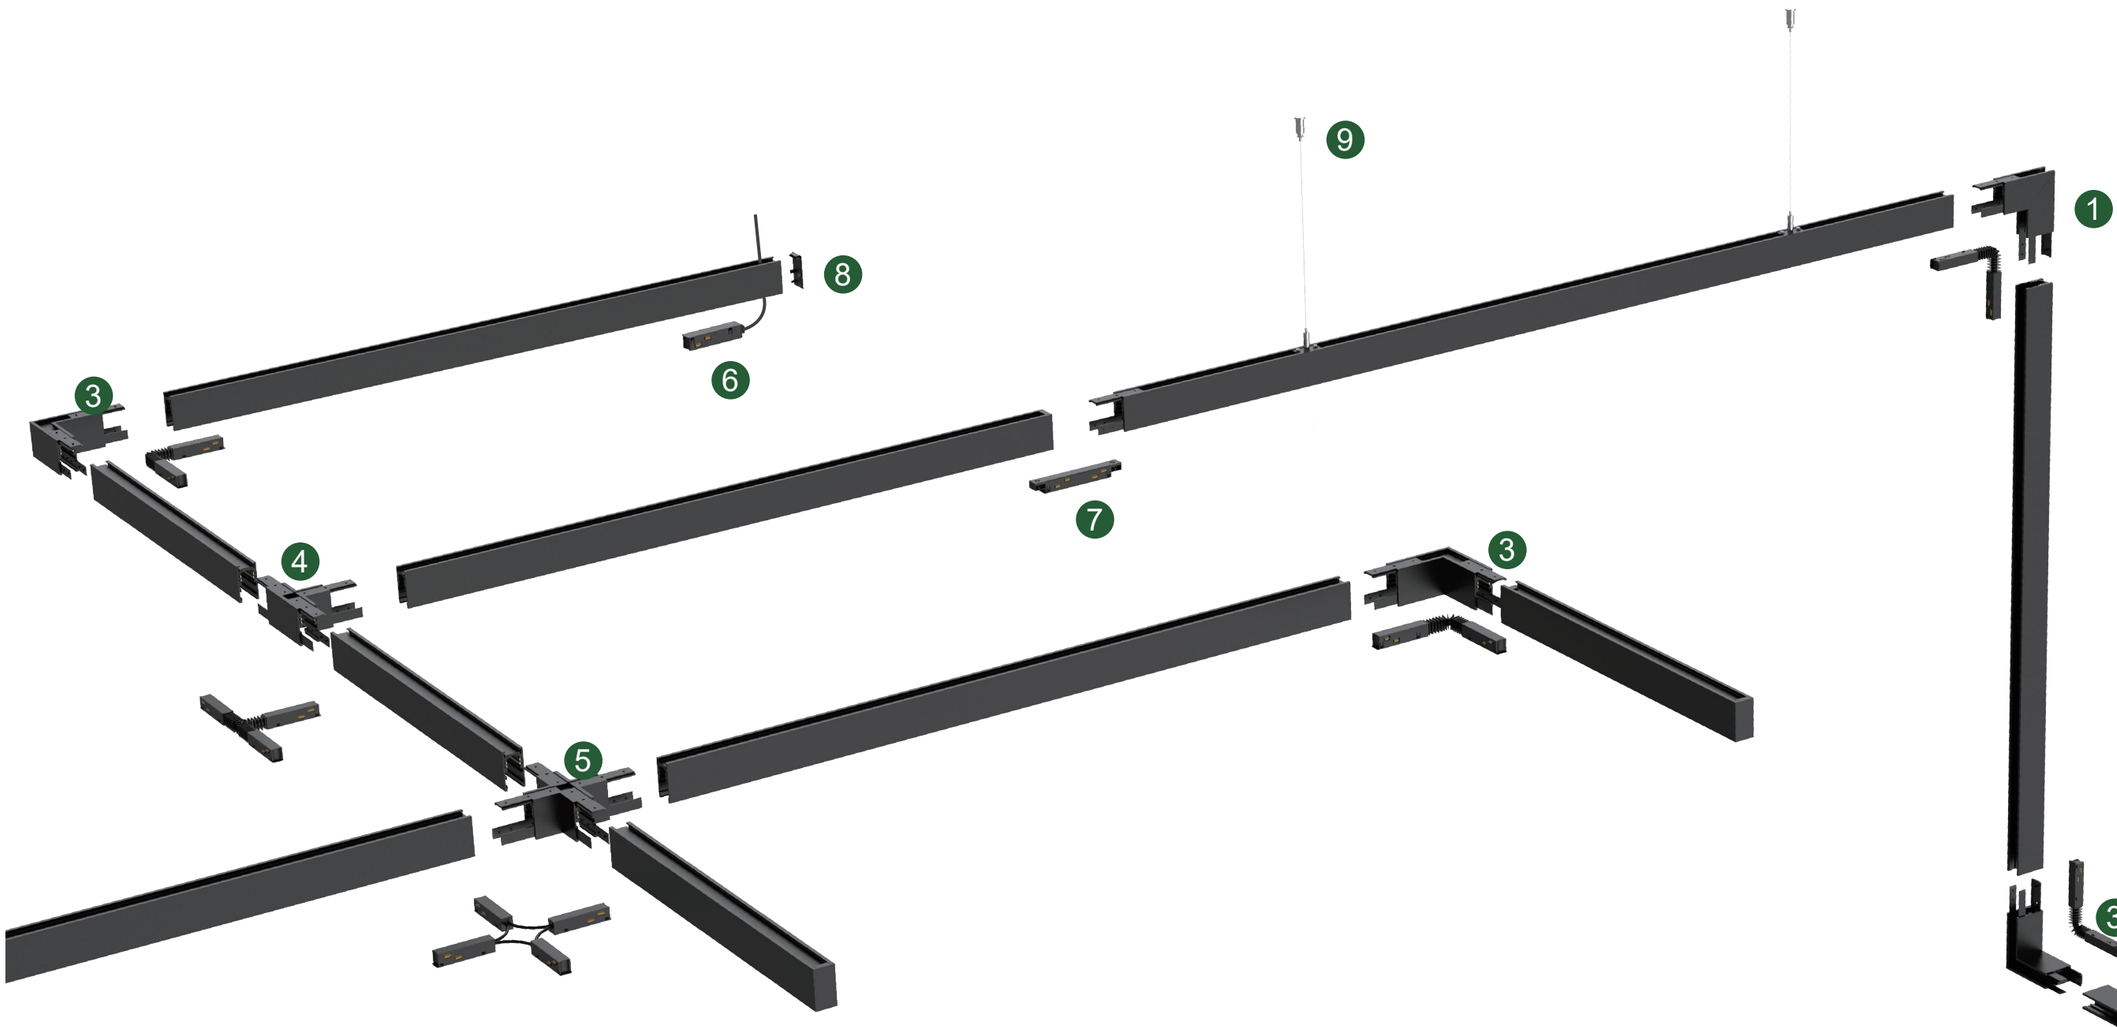

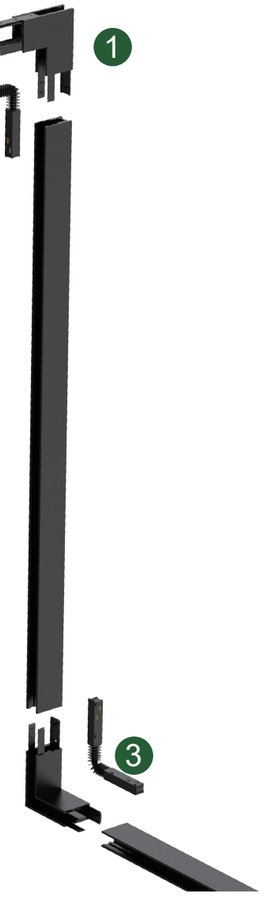



Surface Mounted/Hanging
(vertical 90° internal corner + corner connector)

Model: M19H-VNFLEX Size: L80*W28*H80mm



Surface Mounted/Hanging
(flat 90° corner + corner connector)

Model: M19H-SPFLEX Size: L80*W80*H53mm



Surface Mounted/Hanging
("T" Type corner)

Model: M19H-TZFLEX Size: L132*W80*H53mm



Surface Mounted/Hanging
("+" Type corner)

Model: M19H-SZFLEX Size: L132*W132*H53mm




External power connector

Model: M19-POWER Color: White/Black




Straight Connector

Model: M19-NOFLEX Color: White/Black




End Caps (M19H)

A pair, Black/White




Pendant Kit (Metal)

Model: M19-DPJ A Pair, 1.5m rope, Black/White

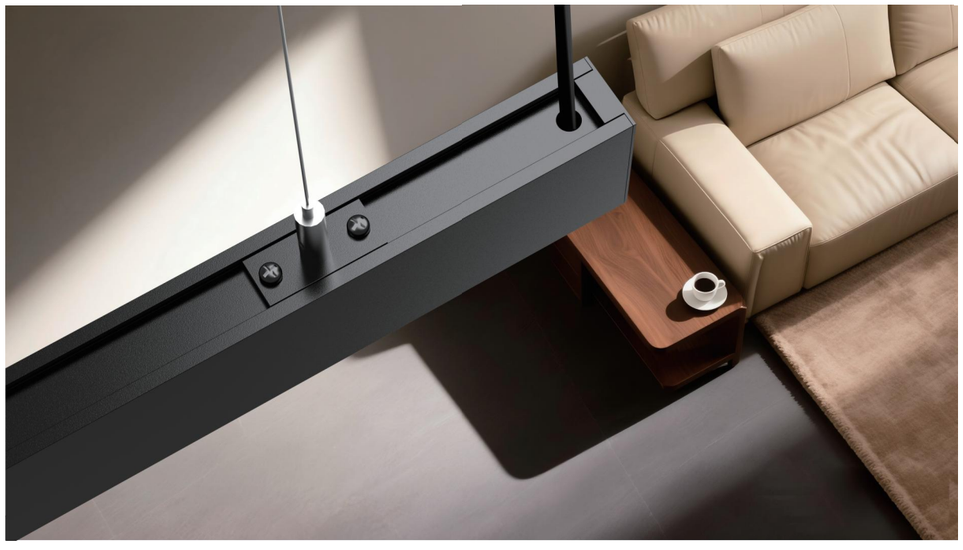

M19E

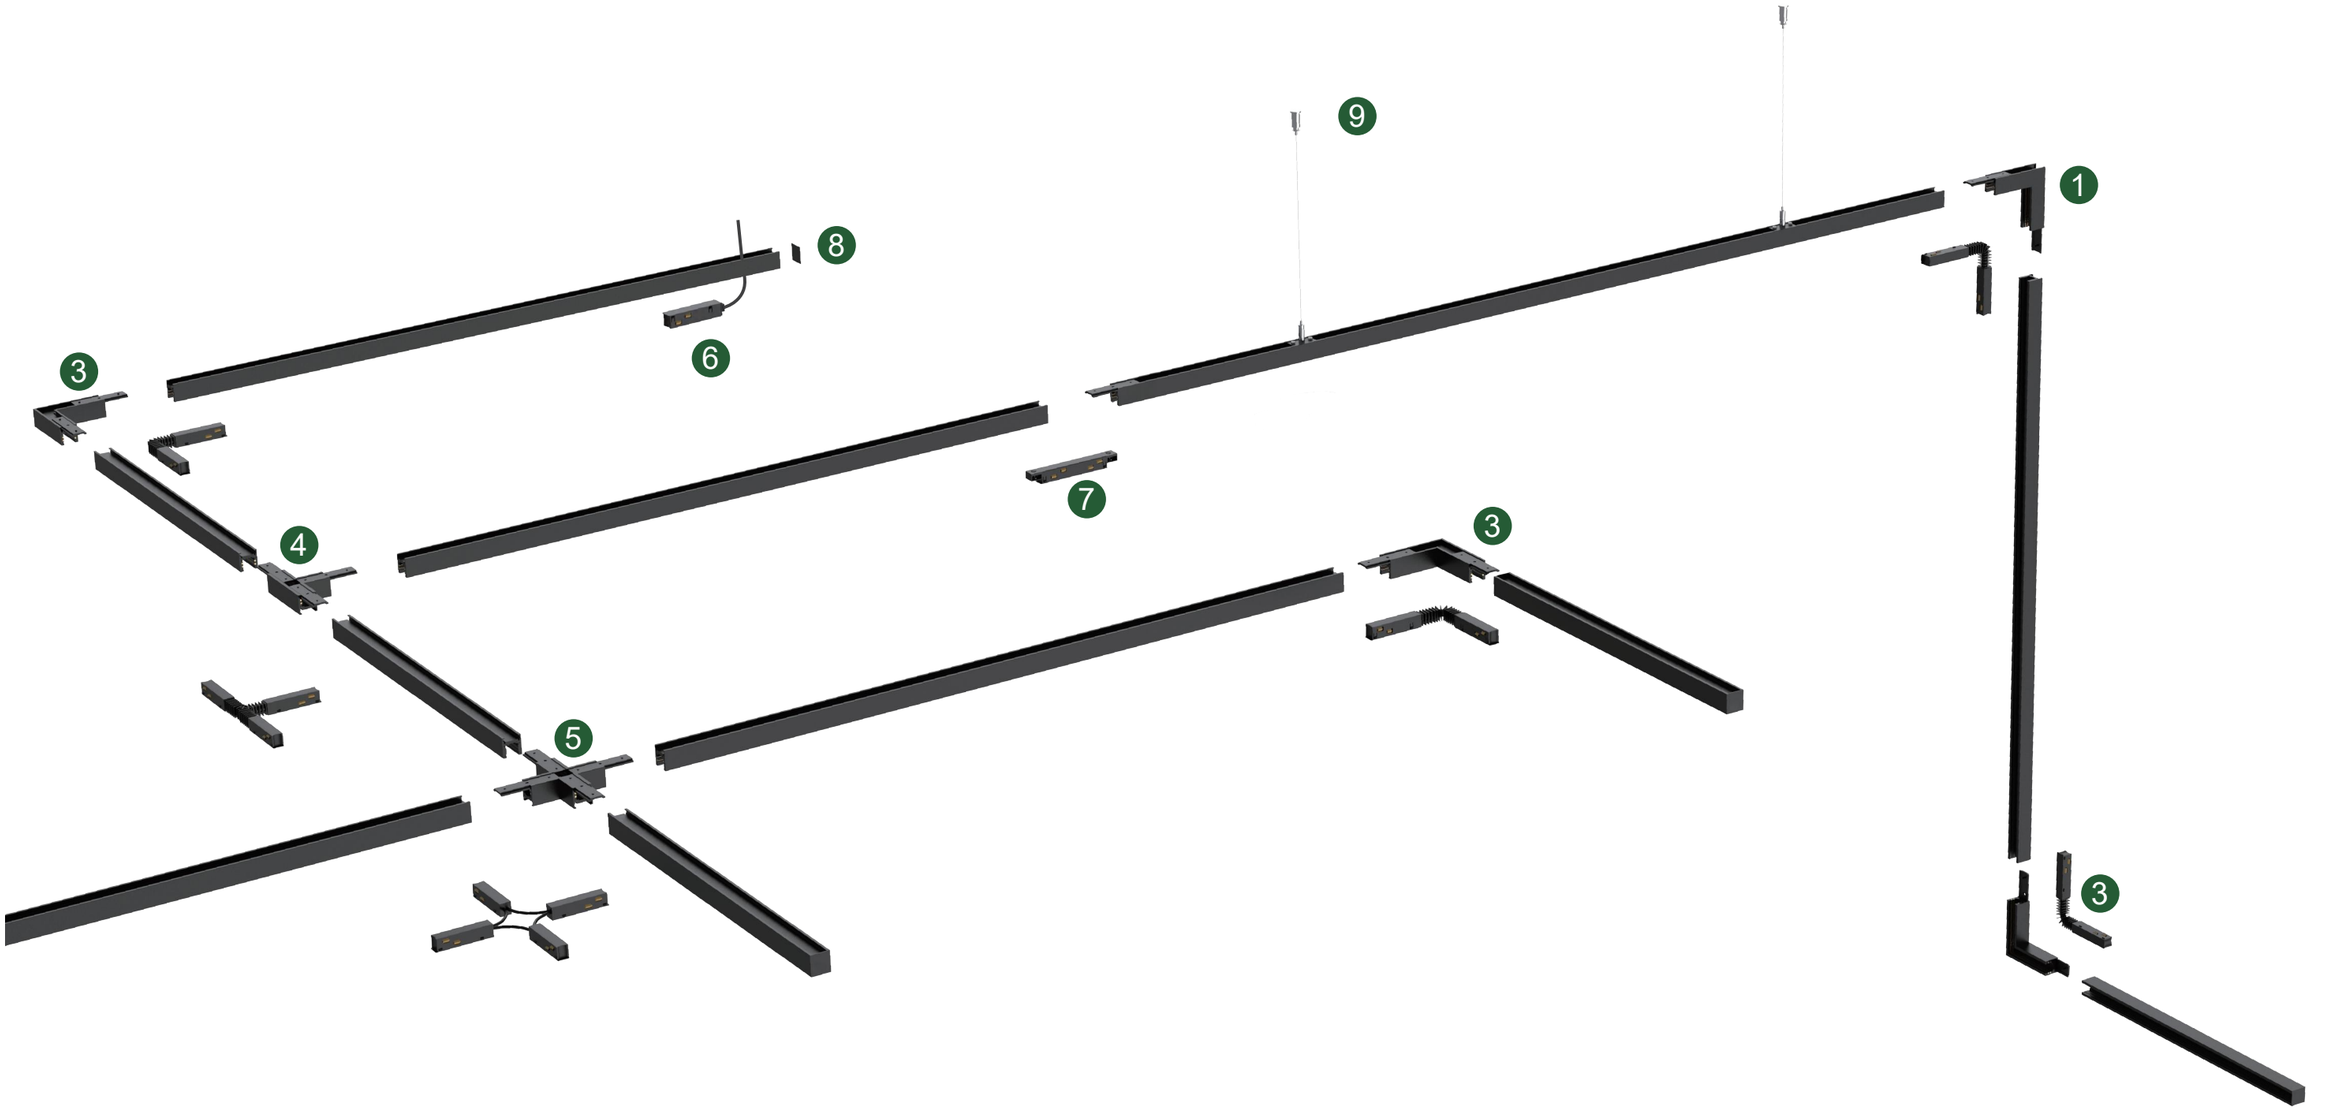



To be used with corner connectors

Surface Mounted/Hanging
(vertical 90° internal corner + corner connector)

Model: M19E-VNFLEX Size: L80*W80*H27mm



To be used with corner connectors

Surface Mounted/Hanging
(flat 90° corner + corner connector)

Model: M19E-SPFLEX Size: L80*W80*H27mm



Surface Mounted/Hanging
("T" Type corner)

Model: M19E-TZFLEX Size: L132*W80*H27mm



Surface Mounted/Hanging
("+"Type corner)

Model: M19E-SZFLEX Size: L132*W132*H27mm




External power connector

Model: M19-POWER Color: White/Black




Straight Connector

Model: M19-NOFLEX Color: White/Black



End Caps (M19E)

A pair, Black/White



Pendant Kit (Metal)


Model: M19-DPJ A Pair, 1.5m rope, Black/White


M19A




1.5M/2M
M19A
Embedded

M19A Trimless Recessed Track



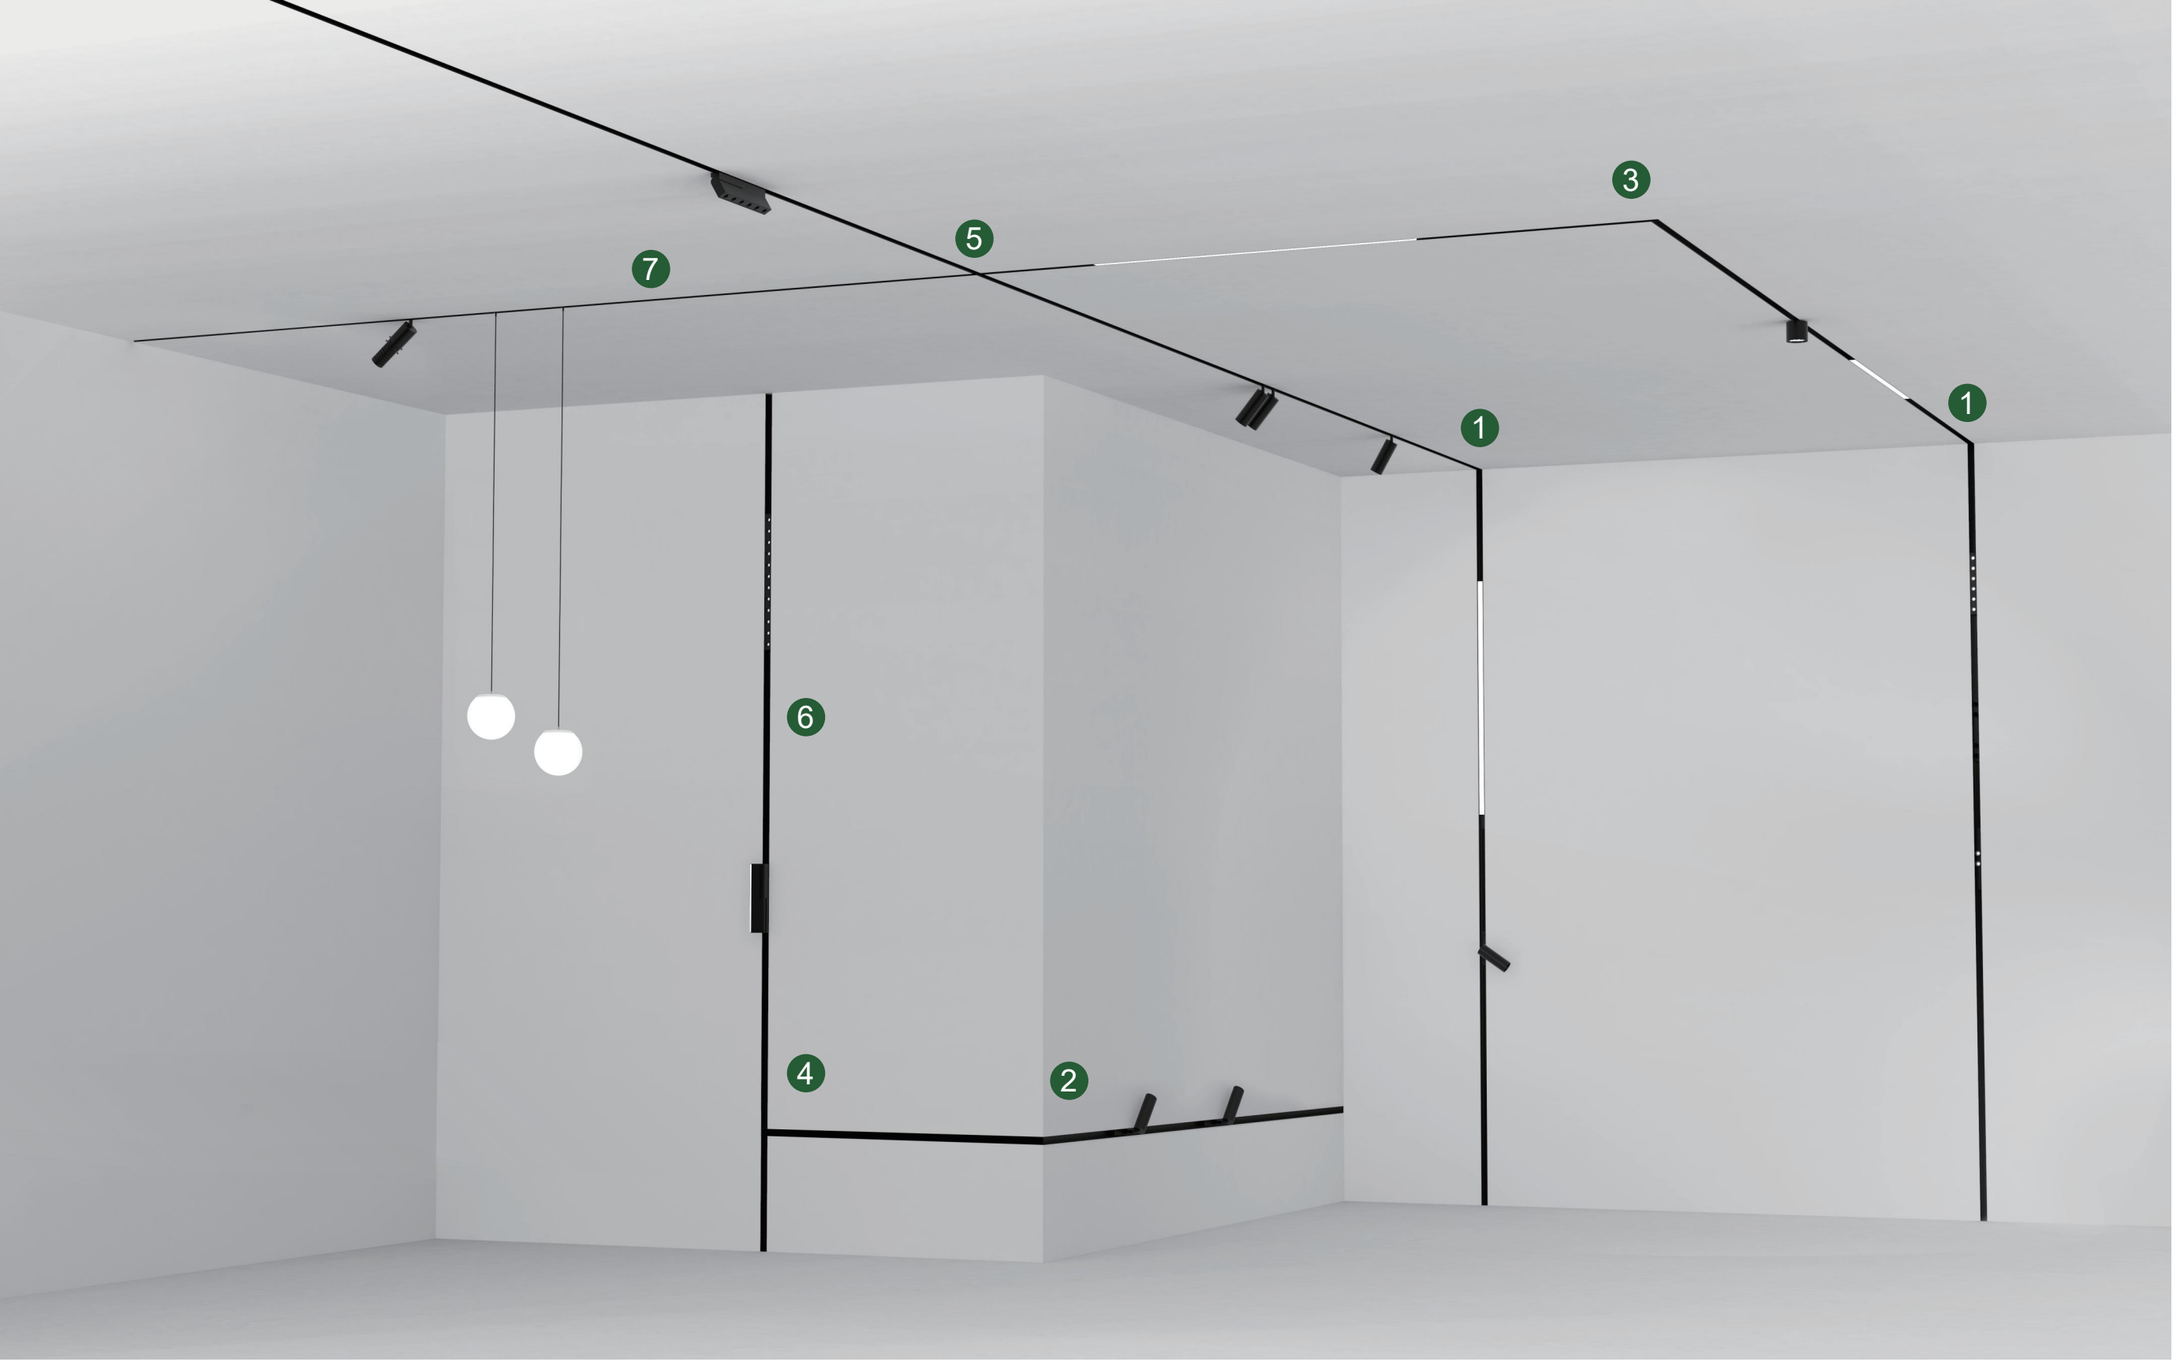

1




To be used with corner connectors

Embedded
(vertical 90° internal corner + corner connector)

Model: M19A-VNFLEX Size: L100*W100*H72mm

2




To be used with corner connectors

Embedded
(vertical 90° exzternal corner + corner connector)

Model: M19A-VWFLEX Size: L100*W100*H72mm

3




To be used with corner connectors

Embedded
(flat 90° corner + corner connector)

Model: M19A-SPFLEX Size: L100*W100*H48mm


4



Embedded
("T" Type corner)

Model: M19A-TZFLEX Size: L128*W100*H48mm

5



Embedded
("+"Type corner)

Model: M19A-SZFLEX Size: L128*W128*H48mm


6



External power connector

Model: M19-POWER Color: White/Black

7



Straight Connector


Model: M19-NOFLEX Color: White/Black


M19T



1.5M/2M
M19T
Embedded


M19T Trimless Recessed Track






Embedded
(vertical 90°internal corner + corner connector)

Model: M19T-VNFLEX Size:L100*W100*H82mm




Embedded
(vertical 90°external corner + corner connector)

Model: M19T-VWFLEX Size:L100*W100*H82mm




Embedded
(flat 90° corner + corner connector)

Model: M19T-SPFLEX Size: L100*W100*H53mm




Embedded
("T" Type corner)

Model: M19T-TZFLEX Size:L128*W100*H53mm




Embedded
("+" Type corner)

Model: M19T-SZFLEX Size:L128*W128*H53mm



External power connector

Model: M19-POWER Color: White/Black



Straight Connector

Model: M19-NOFLEX Color: White/Black

Magnetic Track System

M19





M19 SP30



Non-IC Rated

Aluminum

USE


Dry Location

Quick Info.


- System: 6W, CRI>97
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 25°, 35°
- Dlvd. Lumen: Up to 434lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution

4000K





4000K



Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	6W	25°	97Ra	2700K 3000K 4000K	404.0 lm 416.0 lm 434.0 lm
48Vdc	6W	35°	97Ra	2700K 3000K 4000K	374.0 lm 386.0 lm 404.0 lm





Finish



White



Black

Optional accessary



Honeycomb



M19 SP40




Non-IC Rated | Aluminum | USE | Dry Location

Quick Info.


- System: 10W, CRI>97
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 25°, 35°
- Dlvd. Lumen: Up to 757lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution

4000K




4000K



Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	10W	25°	97Ra	2700K	635.0 lm
				3000K	666.0 lm
				4000K	730.0 lm
48Vdc	10W	35°	97Ra	2700K	679.0 lm
				3000K	710.0 lm
				4000K	757.0 lm

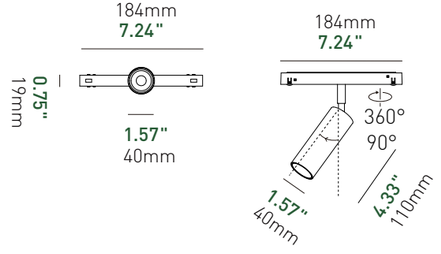

Finish



White Black

Optional accessary



Honeycomb

M19 SP42




Non-IC Rated | Aluminum | USE | Dry Location

Quick Info.


- System: 10W*2, CRI>97
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 25°, 35°
- Dlvd. Lumen: Up to 1548lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution

4000K




4000K



Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	10W*2	25°	97Ra	2700K	1269.0 lm
				3000K	1333.0 lm
				4000K	1460.0 lm
48Vdc	10W*2	35°	97Ra	2700K	1357.0 lm
				3000K	1421.0 lm
				4000K	1548.0 lm

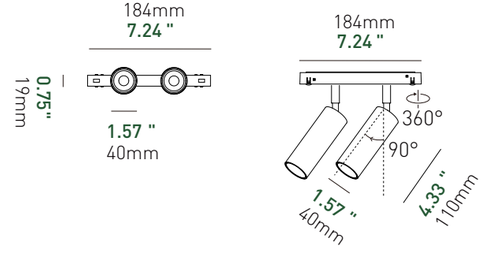

Finish



White Black

Optional accessary



Honeycomb

M19 SP55




Non-IC Rated | Aluminum | USE | Dry Location

Quick Info.


- System: 15W, CRI>90
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 25°, 35°,50°
- Dlvd. Lumen: Up to 1521lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution

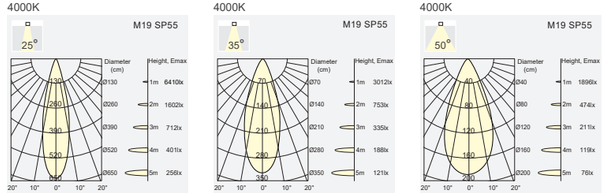

Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	15W	25°	90Ra	2700K	1282.0 lm
				3000K	1327.0 lm
				4000K	1418.0 lm
48Vdc	15W	35°	90Ra	2700K	1389.0 lm
				3000K	1433.0 lm
				4000K	1521.0 lm
48Vdc	15W	50°	90Ra	2700K	1210.0 lm
				3000K	1254.0 lm
				4000K	1342.0 lm

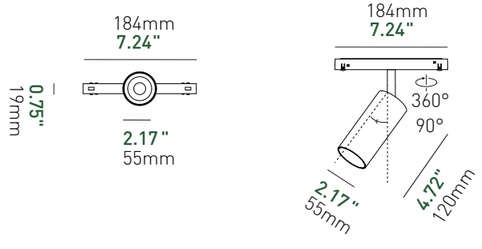

Finish



White Black

Optional accessary



Honeycomb

M19 SP57




Non-IC Rated | Aluminum | USE | Dry Location

Quick Info.


- System: 15W*2, CRI>90
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 25°, 35°,50°
- Dlvd. Lumen: Up to 3042lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution

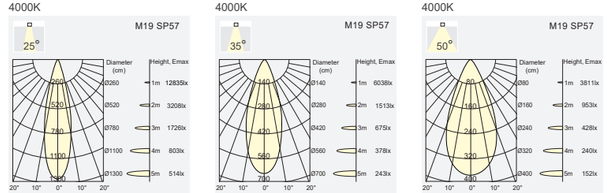

Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	15W*2	25°	90Ra	2700K	2383.0 lm
				3000K	2655.0 lm
				4000K	2836.0 lm
48Vdc	15W*2	35°	90Ra	2700K	2777.0 lm
				3000K	2866.0 lm
				4000K	3042.0 lm
48Vdc	15W*2	50°	90Ra	2700K	2419.0 lm
				3000K	2508.0 lm
				4000K	2684.0 lm

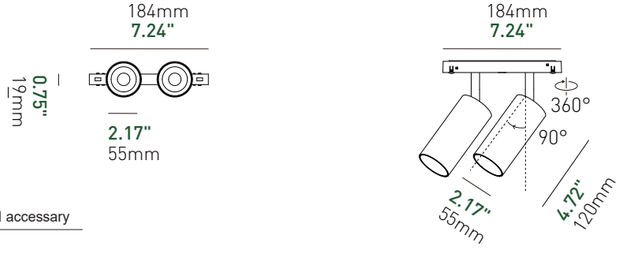

Finish



White Black

Optional accessary



Honeycomb

M19 SP65




Non-IC Rated | Aluminum | USE | Dry Location

Quick Info.


- System: 20W, CRI>90
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 25°, 35°, 50°
- Dlvd. Lumen: Up to 2752lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution

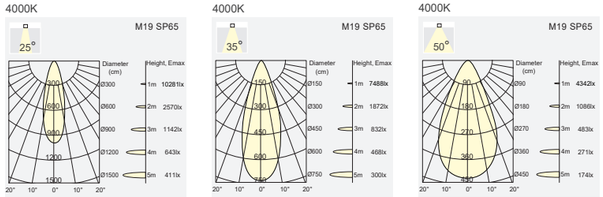

Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	20W	25°	90Ra	2700K	2446.0 lm
				3000K	2511.0 lm
				4000K	2642.0 lm
48Vdc	20W	35°	90Ra	2700K	2555.0 lm
				3000K	2621.0 lm
				4000K	2752.0 lm
48Vdc	20W	50°	90Ra	2700K	2401.0 lm
				3000K	2467.0 lm
				4000K	2598.0 lm

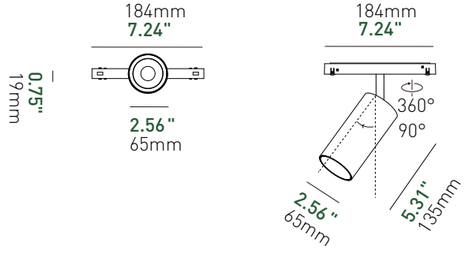

Finish



White | Black

Optional accessary



Honeycomb

M19 XP55




Non-IC Rated | Aluminum | USE | Dry Location

Quick Info.


- System: 8W, CRI>97
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 25°, 35°
- Dlvd. Lumen: Up to 577lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution

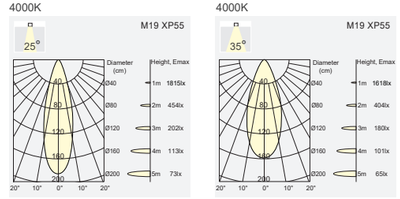

Product Specifications


LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	8W	25°	97Ra	2700K	452.0 lm
				3000K	477.0 lm
				4000K	529.0 lm
48Vdc	8W	35°	97Ra	2700K	499.0 lm
				3000K	525.0 lm
				4000K	577.0 lm

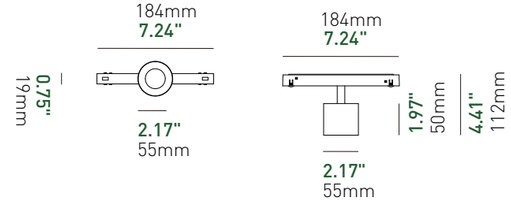

Finish



White | Black

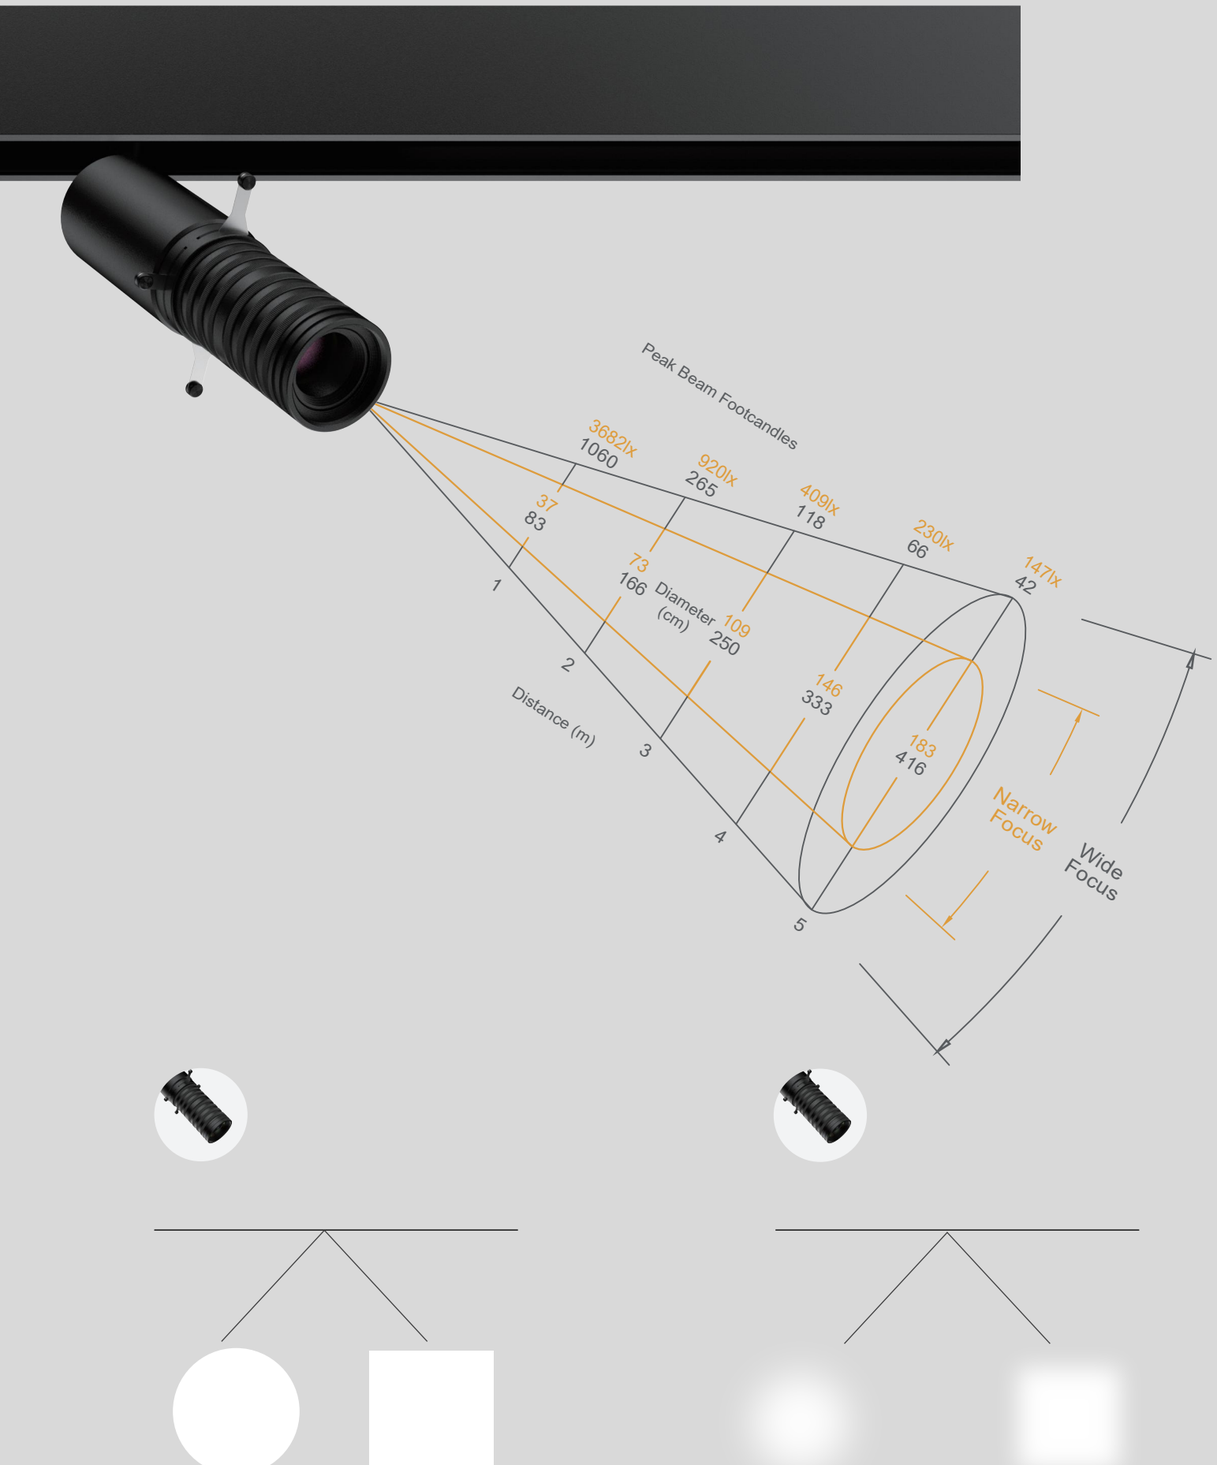

M19 SP36




Intertek · 5 YEARS Warranty · Non-IC Rated · Aluminum · USE · Dry Location

Quick Info.

- System: 8W, CRI>97
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 25°-45°
- Dlvd. Lumen: Up to 619lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI


Light Distribution

4000K



Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	8W	25°-45°	97Ra	2700K 3000K 4000K	543 lm 568 lm 619 lm

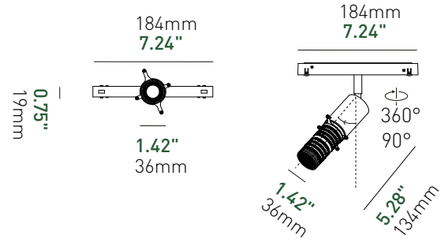

Finish



White Black



M19 GL20




Intertek | 5 YEARS Warranty | Non-IC Rated | Aluminum | USE | Dry Location

Quick Info.

- System: 10W, CRI>95
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 30°
- Dlvd. Lumen: Up to 459lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI


Light Distribution

4000K



Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	10W	30°	95Ra	2700K	355.0 lm
				3000K	389.0 lm
				4000K	459.0 lm

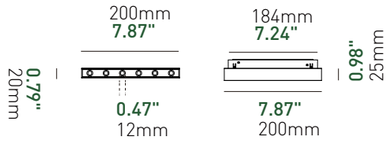


Finish



White Black

M19 GL40

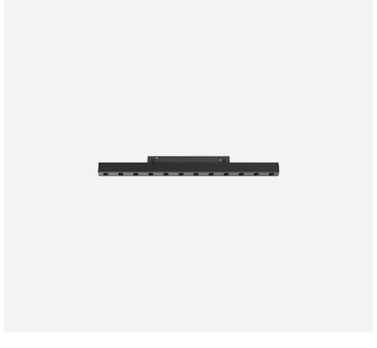


Intertek | 5 YEARS Warranty | Non-IC Rated | Aluminum | USE | Dry Location

Quick Info.

- System: 20W, CRI>95
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 30°
- Dlvd. Lumen: Up to 918lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI


Light Distribution

4000K



Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	20W	30°	95Ra	2700K	709.0 lm
				3000K	779.0 lm
				4000K	918.0 lm

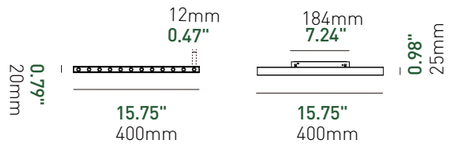


Finish



White Black

M19 GL80

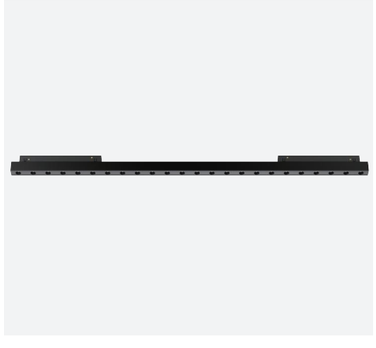


Intertek | 5 YEARS Warranty | Non-IC Rated | Aluminum | USE | Dry Location

Quick Info.

- System: 40W, CRI>95
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 30°
- Dlvd. Lumen: Up to 1836lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI


Light Distribution

4000K



Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	40W	30°	95Ra	2700K	1418.0 lm
				3000K	1558.0 lm
				4000K	1836.0 lm

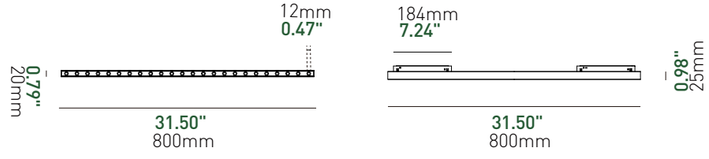

Finish



White Black



M19 GL02




Non-IC Rated | Aluminum | USE | Dry Location

Quick Info.

- System: 4W, CRI>95
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 30°
- Dlvd. Lumen: Up to 121lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI


Light Distribution

4000K



Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	4W	30°	95Ra	2700K	83.0 lm
				3000K	95.0 lm
				4000K	121.0 lm

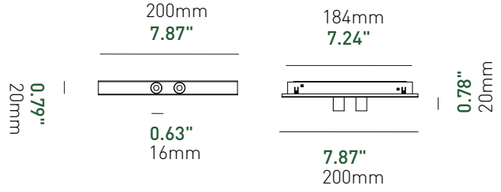


Finish



White Black

M19 GL04




Non-IC Rated | Aluminum | USE | Dry Location

Quick Info.

- System: 8W, CRI>95
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 30°
- Dlvd. Lumen: Up to 306lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI


Light Distribution

4000K



Product Specifications


LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	8W	30°	95Ra	2700K	234.0 lm
				3000K	258.0 lm
				4000K	306.0 lm

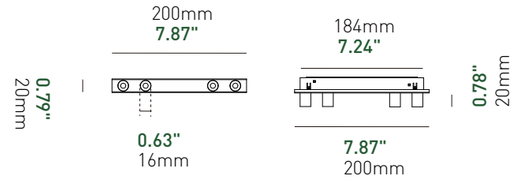


Finish



White Black

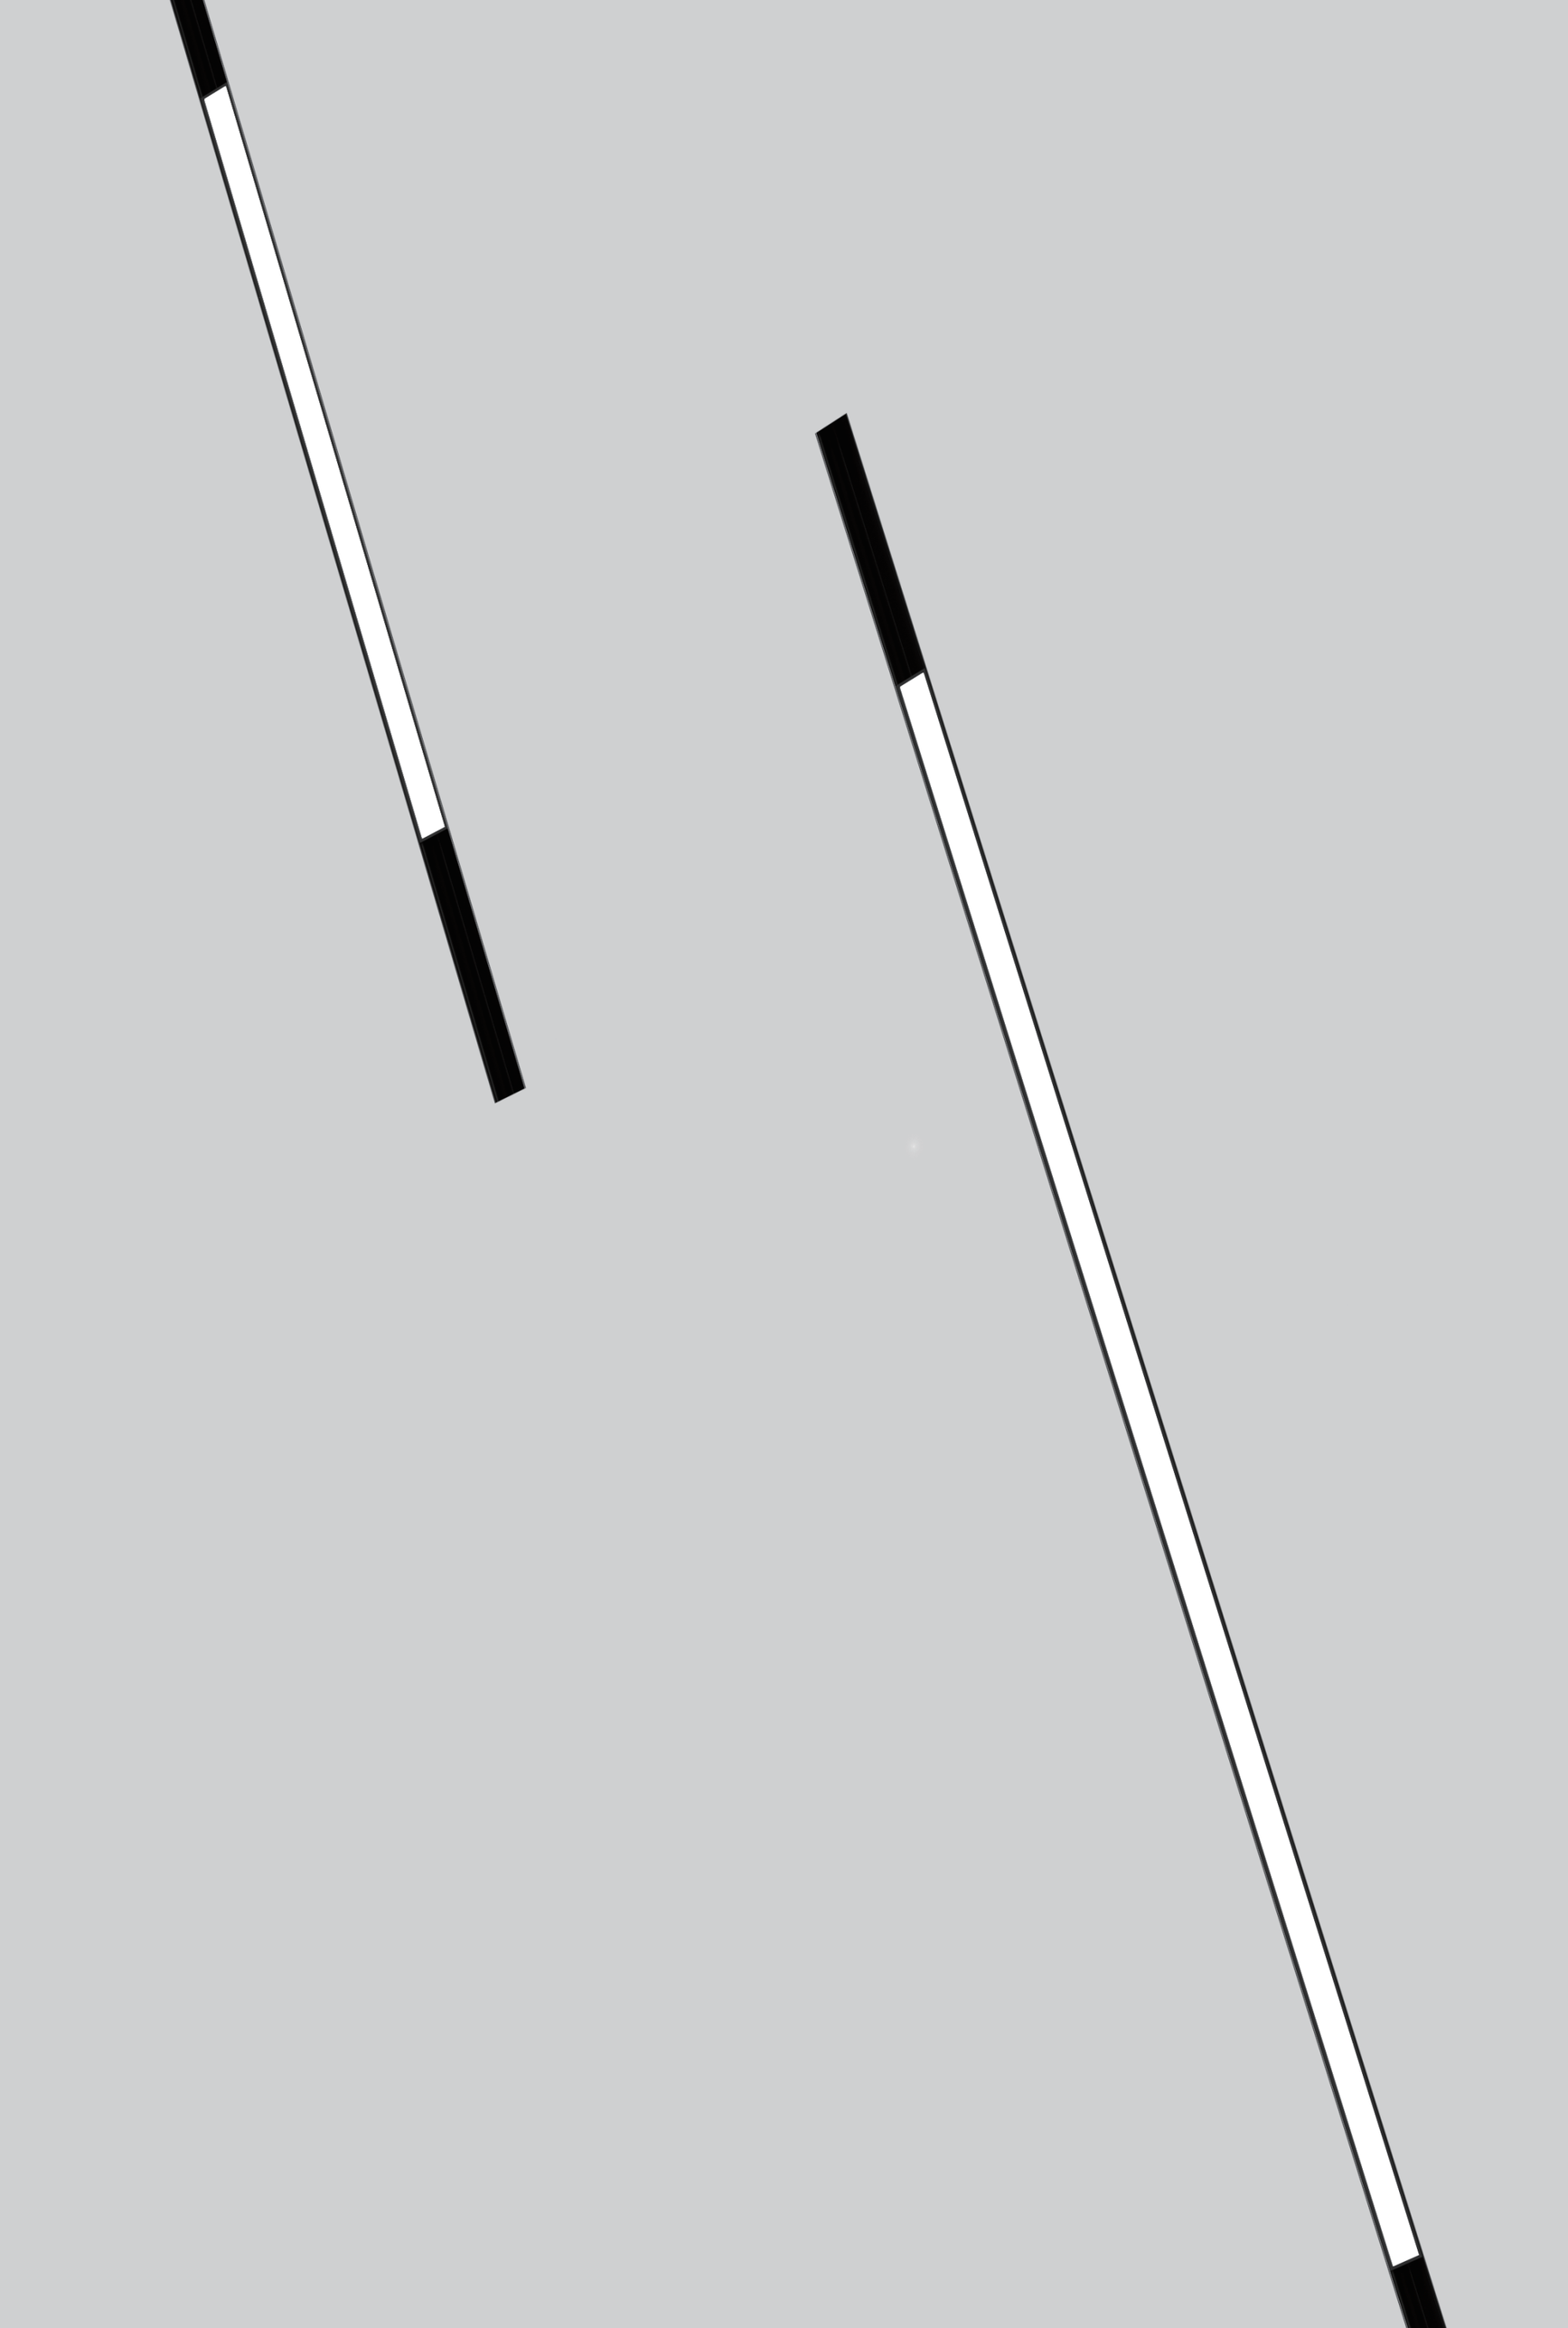

M19 FL40




Non-IC Rated | Aluminum | USE | Dry Location

Quick Info.

- System: 15W, CRI>95
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 120°
- Dlvd. Lumen: Up to 662lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI


Light Distribution

4000K



Product Specifications


LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	15W	120°	95Ra	2400K	533.0 lm
				3000K	576.0 lm
				4000K	662.0 lm

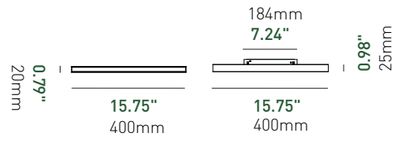

Finish

White Black

M19 FL80




Non-IC Rated | Aluminum | USE | Dry Location

Quick Info.

- System: 30W, CRI>95
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 120°
- Dlvd. Lumen: Up to 1410lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI


Light Distribution

4000K




Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	30W	120°	95Ra	2700K	1154.0 lm
				3000K	1239.0 lm
				4000K	1410.0 lm

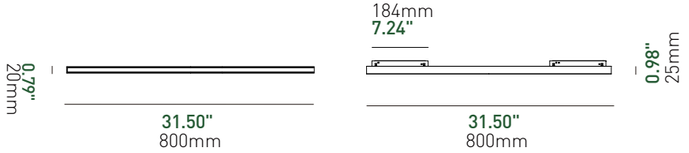

Finish

White Black

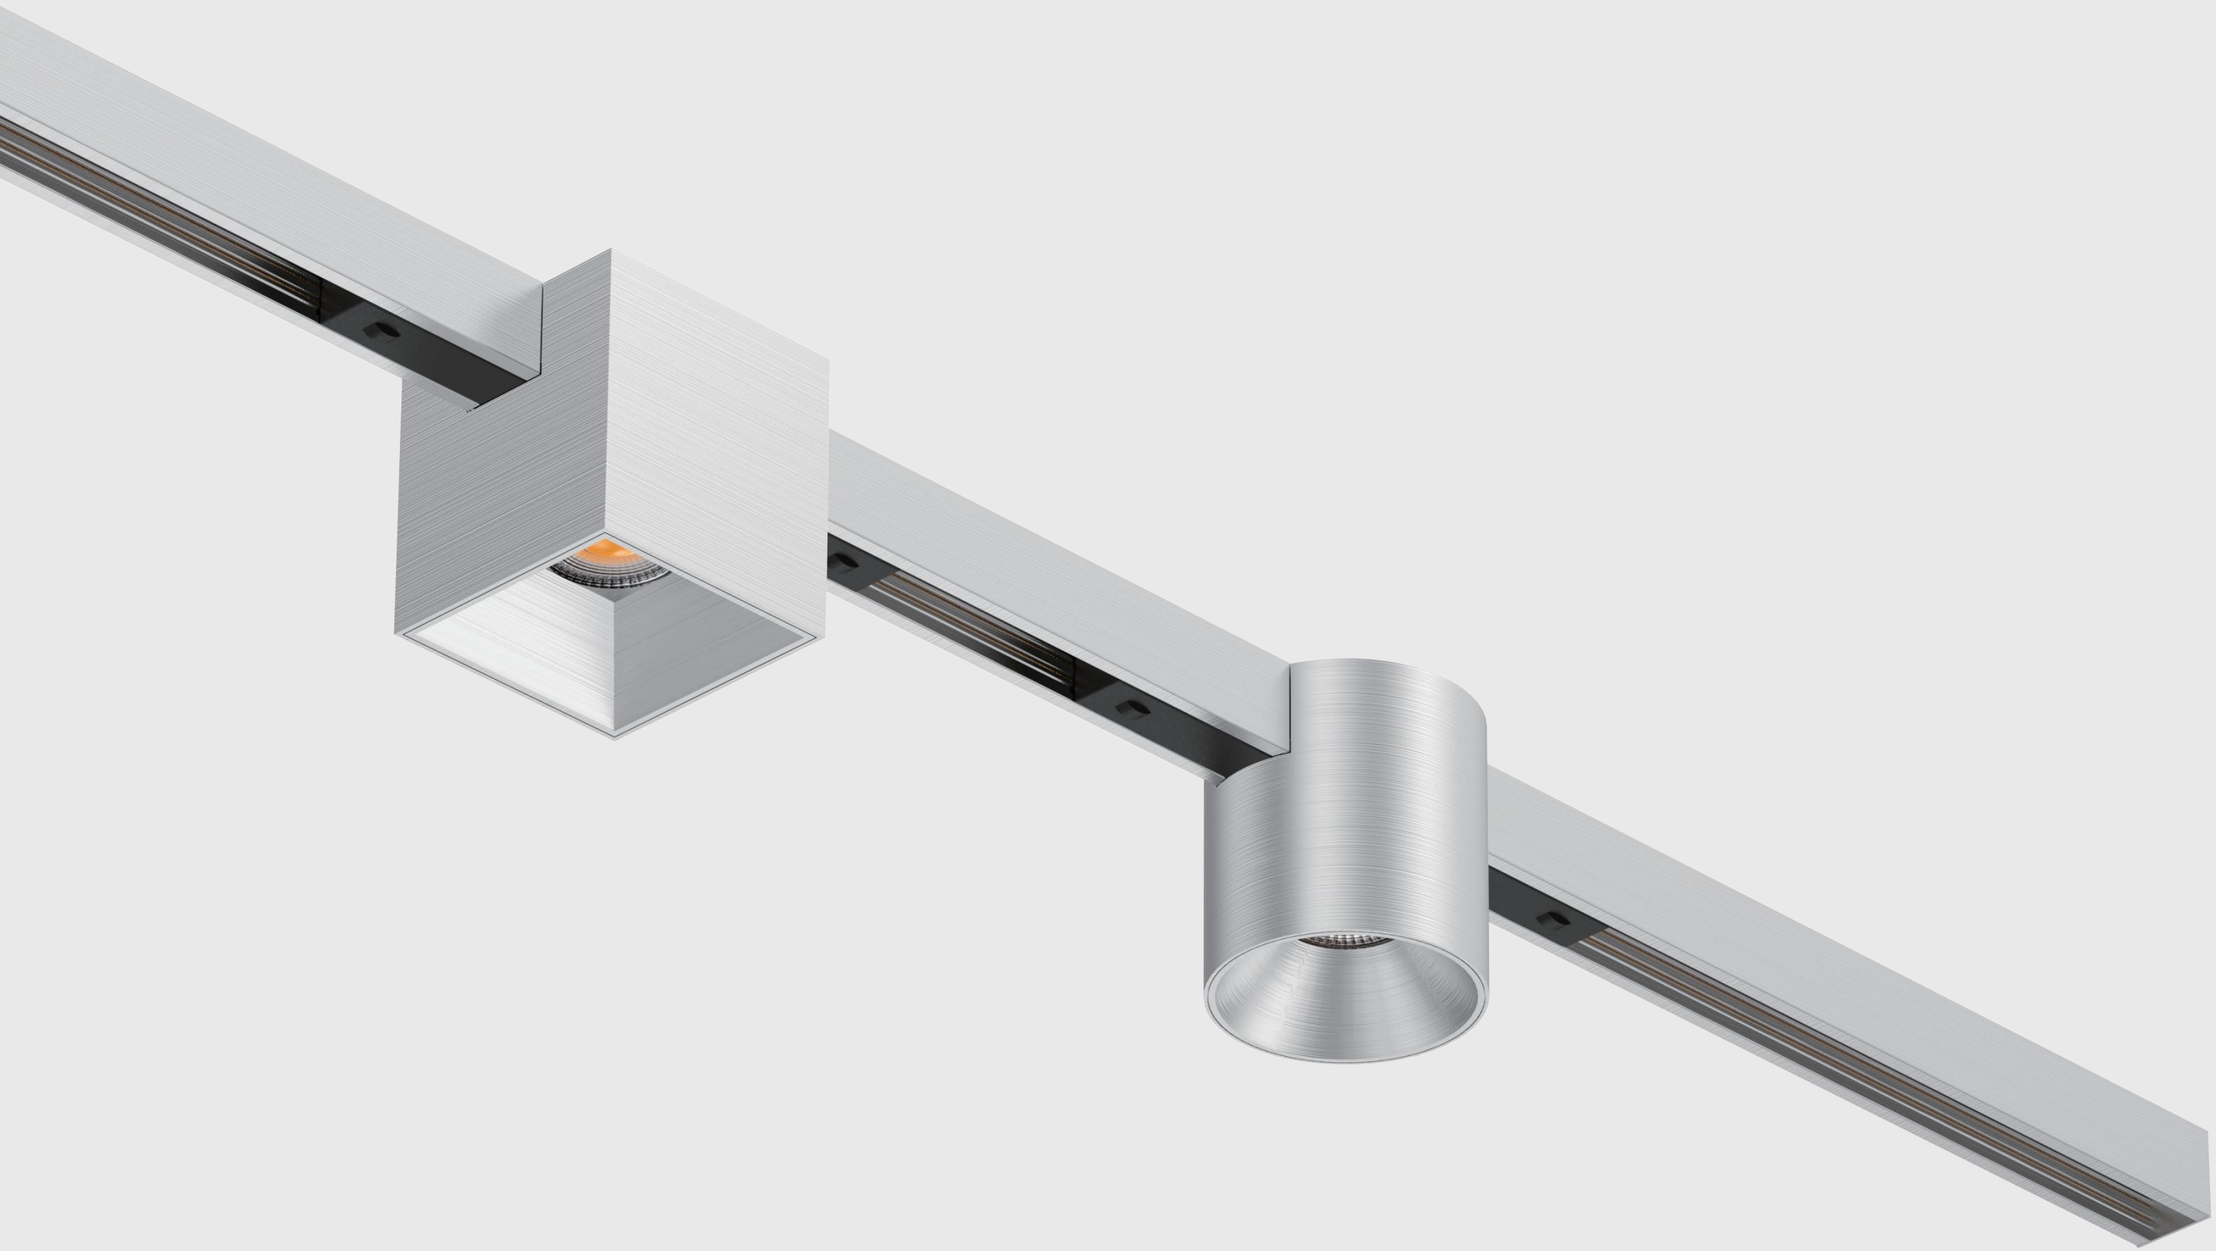

M19 XP74-ER80




Non-IC Rated | Aluminum | USE | Dry Location

Quick Info.

- System: 8W, CRI>97
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 25°, 35°, 50°
- Dlvd. Lumen: Up to 619lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI


Fit into M19E
(short surface-mounted) rail only

Light Distribution

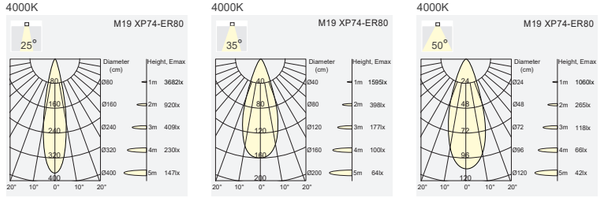

Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	8W	25°	97Ra	2700K 3000K 4000K	508.0 lm 533.0 lm 584.0 lm
48Vdc	8W	35°	97Ra	2700K 3000K 4000K	543.0 lm 568.0 lm 619.0 lm
48Vdc	8W	50°	97Ra	2700K 3000K 4000K	530.0 lm 555.0 lm 606.0 lm

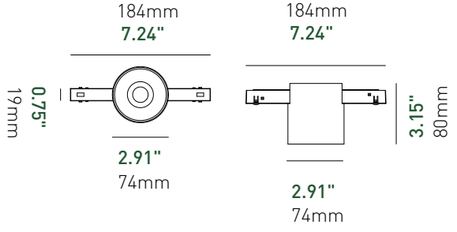


Finish



Silver | White | Black

M19 XP74-ES80




Non-IC Rated | Aluminum | USE | Dry Location

Quick Info.

- System: 8W, CRI>97
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 25°, 35°, 50°
- Dlvd. Lumen: Up to 619lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI


Fit into M19E
(short surface-mounted) rail only

Light Distribution

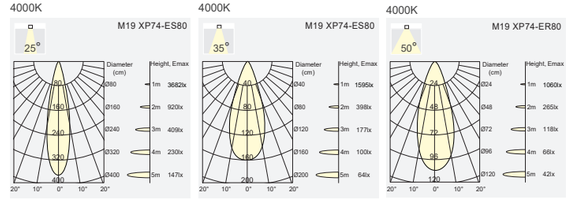

Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	8W	25°	97Ra	2700K 3000K 4000K	508.0 lm 533.0 lm 584.0 lm
48Vdc	8W	35°	97Ra	2700K 3000K 4000K	543.0 lm 568.0 lm 619.0 lm
48Vdc	8W	50°	97Ra	2700K 3000K 4000K	530.0 lm 555.0 lm 606.0 lm

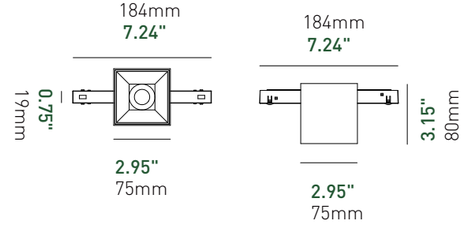

Finish



Silver | White | Black





M19 GF20




Intertek | 5 Years Warranty | Non-IC Rated | Aluminum | USE | Dry Location

Quick Info.

- System: 10W, CRI>95
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 30°
- Dlvd. Lumen: Up to 468lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI


Light Distribution

4000K



Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	10W	30°	95Ra	2700K	418.0 lm
				3000K	438.0 lm
				4000K	468.0 lm

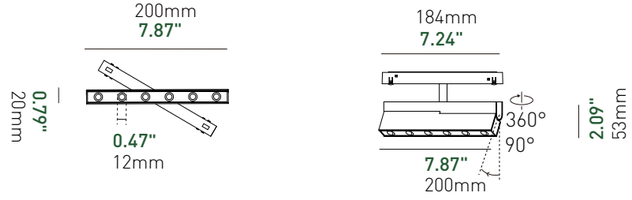

Finish



White | Black

M19 FL20




Intertek | 5 Years Warranty | Non-IC Rated | Aluminum | USE | Dry Location

Quick Info.

- System: 10W, CRI>95
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 120°
- Dlvd. Lumen: Up to 331lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI


Light Distribution

4000K



Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	10W	120°	95Ra	2700K	267.0 lm
				3000K	288.0 lm
				4000K	331.0 lm

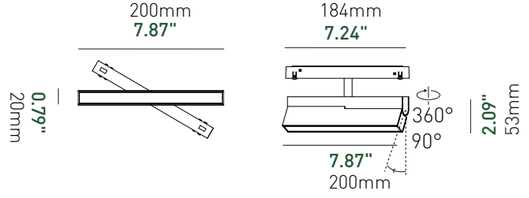


Finish



White | Black

M19 GL12

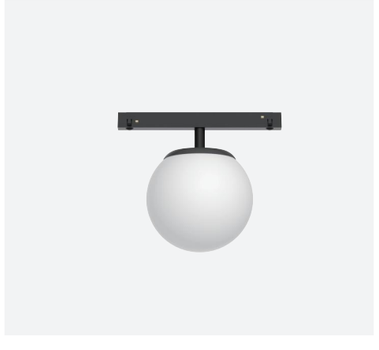


Non-IC Rated | Aluminum | USE | Dry Location

Quick Info.

- System: 6W, CRI>97
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 210°
- Dlvd. Lumen: Up to 377lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI


Light Distribution

3000K



Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	6W	210°	97Ra	2700K	341.0 lm
				3000K	359.0 lm
				4000K	377.0 lm

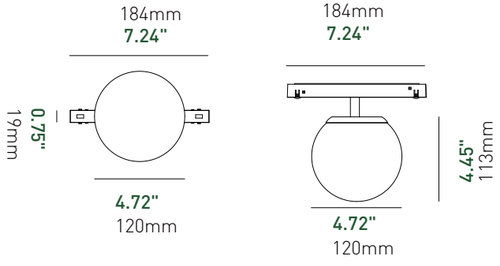


Finish



White Black

M19 GL12-D

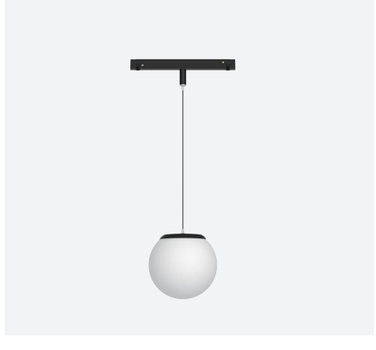


Non-IC Rated | Aluminum | USE | Dry Location

Quick Info.

- System: 6W, CRI>97
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 210°
- Dlvd. Lumen: Up to 377lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI


Light Distribution

3000K



Product Specifications

LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	6W	210°	97Ra	2700K	341.0 lm
				3000K	359.0 lm
				4000K	377.0 lm

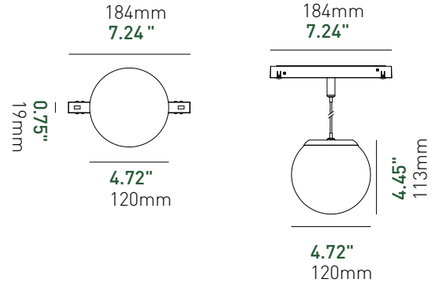

Finish



White Black

M19 XP20




Non-IC Rated | Aluminum | USE | Dry Location

Quick Info.

- System: 6W, CRI>97
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 25°
- Dlvd. Lumen: Up to 409lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI


Light Distribution

3000K



Product Specifications


LED	Power	Beam Angle	CRI	CCT	Lumens
48Vdc	6W	25°	97Ra	2700K	373.0 lm
				3000K	391.0 lm
				4000K	409.0 lm

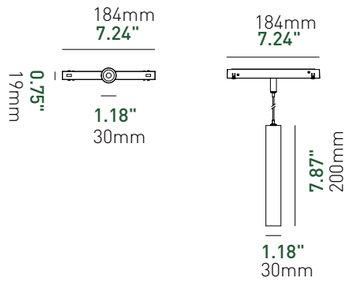

Finish



Silver | White | Black

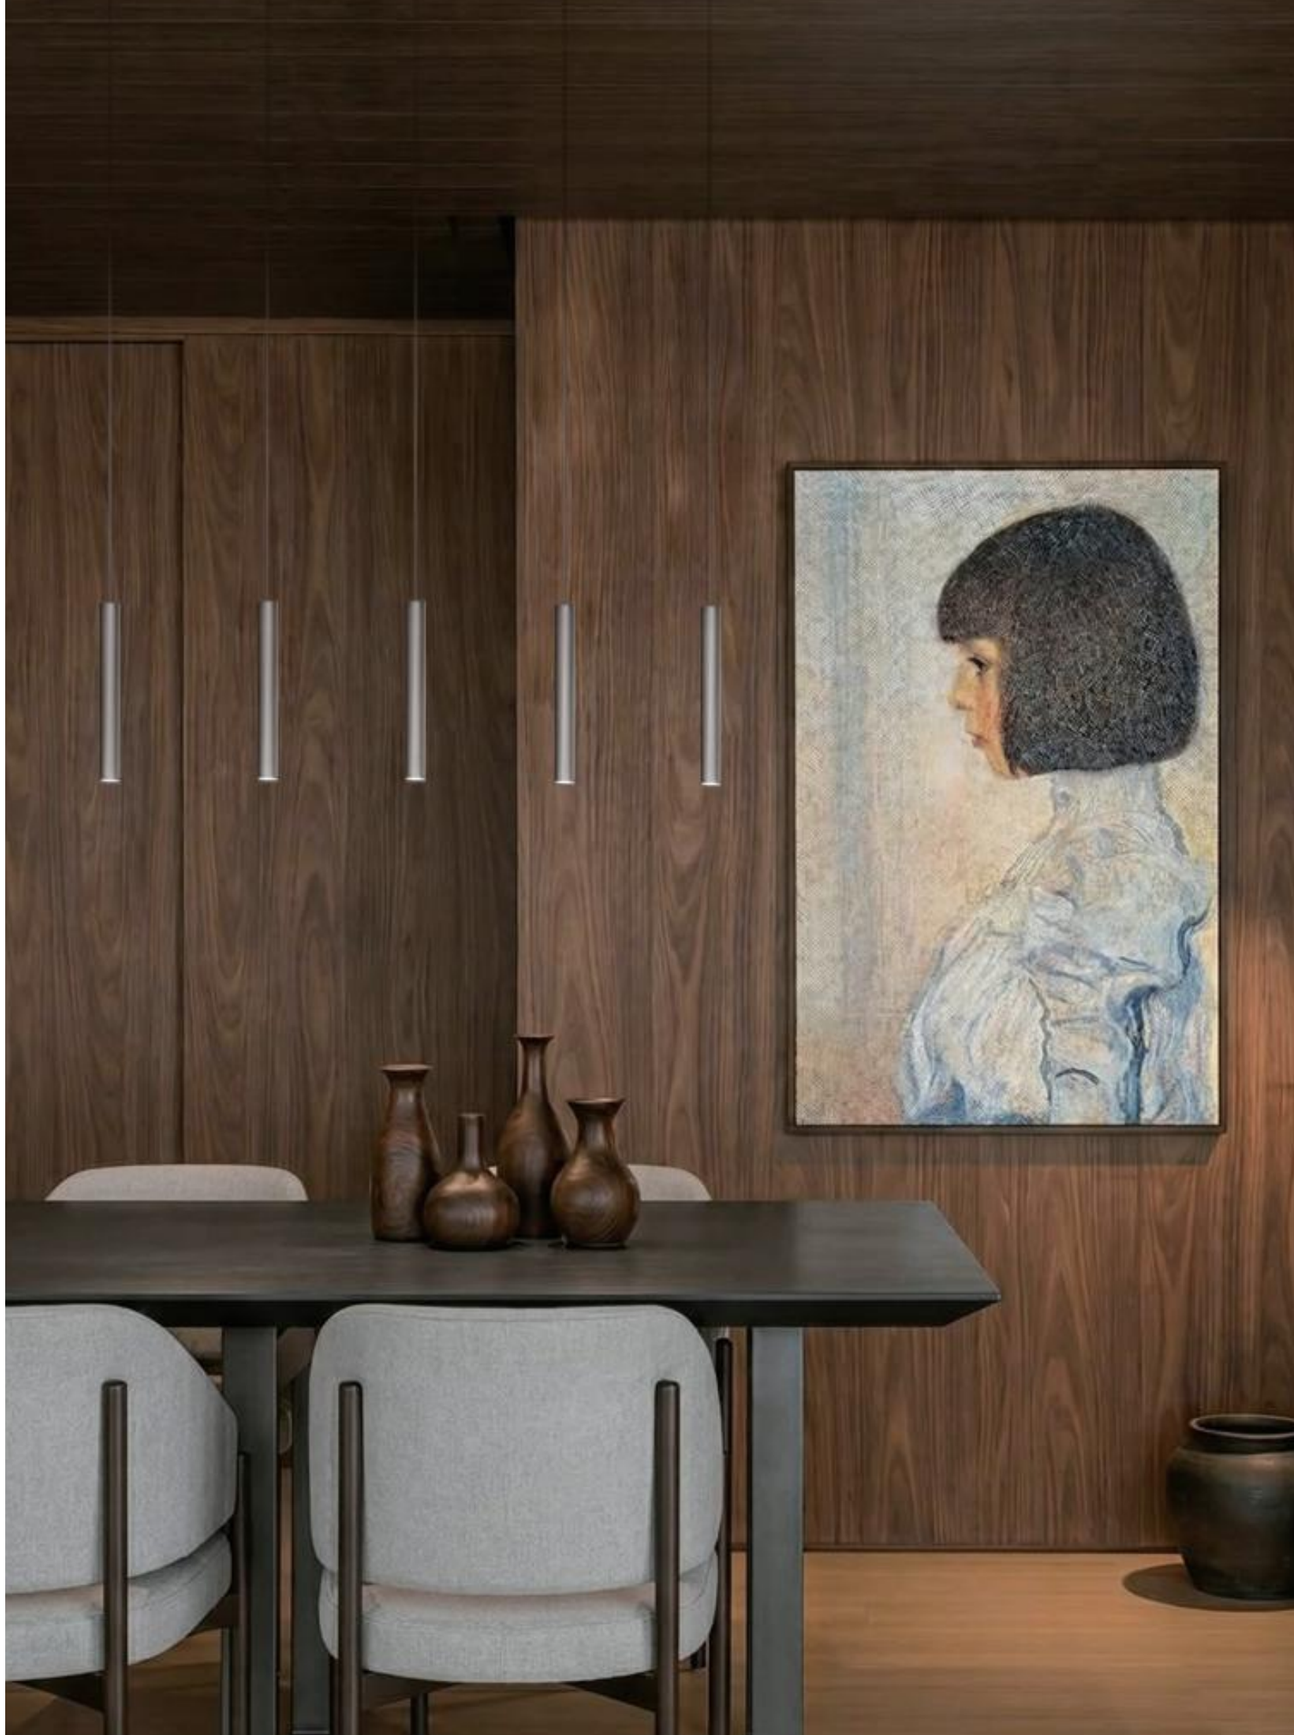



M19 XP15




Intertek · 5 Years Warranty · Non-IC Rated · Aluminum · USE · Dry Location

Quick Info.

- System: 8W, CRI>97
- CCT: 2700K, 3000K, 4000K, and 2700-6000K/90Ra available
- Beam Angle: 25°, 35°, 50°
- Dlvd. Lumen: Up to 619lm
- IP Class: IP20
- DIM: ON-OFF, TRIAC, 0-10V, DALI

Light Distribution

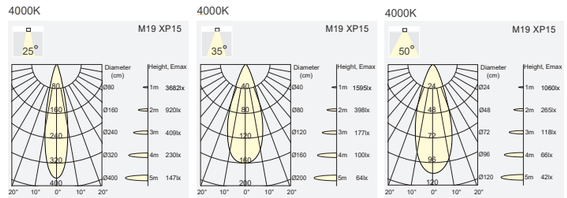

Product Specifications

Power	Beam Angle	CRI	CCT	Lumens
8W	25°	97Ra	2700K 3000K 4000K	508.0 lm 533.0 lm 584.0 lm
8W	35°	97Ra	2700K 3000K 4000K	543.0 lm 568.0 lm 619.0 lm
8W	50°	97Ra	2700K 3000K 4000K	530.0 lm 555.0 lm 606.0 lm

Finish



