


NIMO



CDYY01









CDYY01



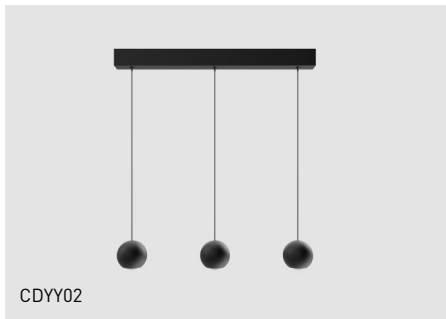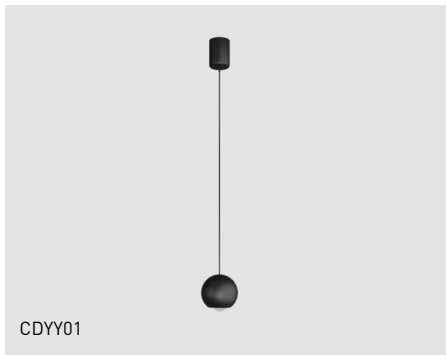

LED | 36V | 200mA*3/Max | IP20

CRI ≥ 98

INSTALL TYPE / SURFACE MOUNTED

CCT / 2700K 3000K 3500K 4000K
4500K 5000K 5700K

TUNABLE WHITE /
2700K 6000K


BEAM ANGLE / 15° 25° 45° 60°

COLOR / BLACK BLACK MIRROR SILVER MIRROR MATTE SILVER

MATERIAL / ALUMINUM

LUMENS / 49 Lm/W

POWER / 8W / 3*8W

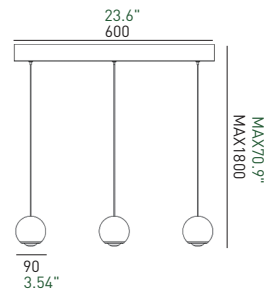

DRIVER*

COMMON IN

ON/OFF 220-240V AC-50/60Hz 100-277V AC-50/60Hz

CUSTOMIZE AVAILABLE

TRIAC DIM 220-240V AC-50/60Hz 100-277V AC-50/60Hz

0-10V DIM 220-240V AC-50/60Hz 100-277V AC-50/60Hz

DALI DIM 220-240V AC-50/60Hz 100-277V AC-50/60Hz

NIMO SERIES









CDYY-3S



CDYY-5S


LED | 36V | 200mA*5/Max | IP20

CRI ≥ 98

INSTALL TYPE / SURFACE MOUNTED

CCT / 2700K ● 3000K ● 3500K ● 4000K ○
4500K ○ 5000K ○ 5700K ●

TUNABLE WHITE / 
2700K 6000K



BEAM ANGLE / 
15° 25° 45° 60°

COLOR / 
BLACK BLACK MIRROR
SILVER MIRROR
MATTE SILVER

MATERIAL / ALUMINUM

LUMENS / 49 Lm/W

POWER / 3*8W / 5*8W

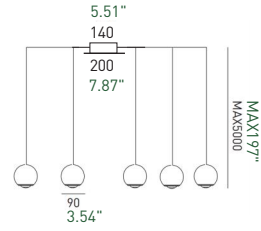

DRIVER*

COMMON IN

ON/OFF 220-240V AC-50/60Hz 100-277V AC-50/60Hz

CUSTOMIZE AVAILABLE

TRIAC DIM 220-240V AC-50/60Hz 100-277V AC-50/60Hz

0-10V DIM 220-240V AC-50/60Hz 100-277V AC-50/60Hz

DALI DIM 220-240V AC-50/60Hz 100-277V AC-50/60Hz