



Decor Lights

DXH-02 Astro





PUSH




PULL



Freely hover at a desired height

DXH-02 Astro

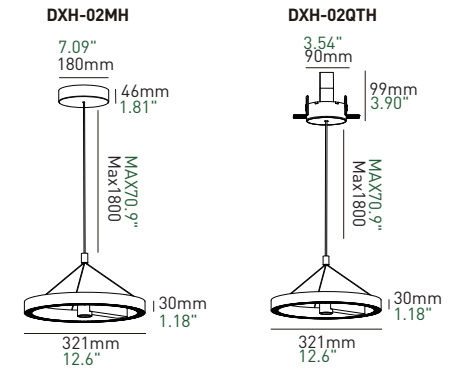

(Hover Freely)

(Embedded Hover Freely)

Basic Information

Model	DXH-02
Mounting	Surface mounted
Color	Black
Material	Aluminum
IP Rating	IP20
Power	Max. 30W
Led Voltage	DC36V
Input Current	Max. 800mA

Optical Parameters

Light Source	LED COB
Lumens	52lm/W
CRI	97Ra
CCT	3000K ● 3500K ● 4000K ○
CCT Changeable	2700K 6000K
Beam Angle	60° + 120°
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI




Game Pole

DZZ-02M



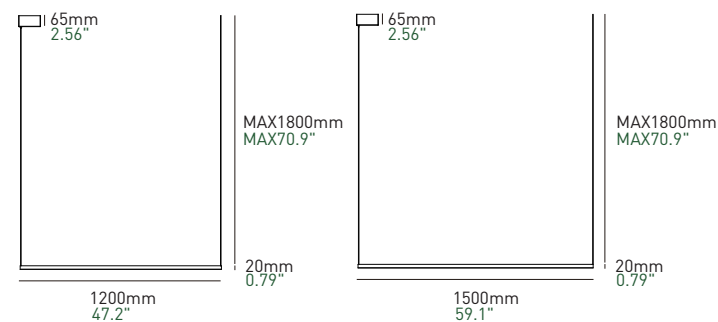

DZZ-02M



Basic Information

Model	DZZ-02M
Mounting	Surface mounted
Length	1.2m/1.5m
Color	Black
Material	Aluminum
IP Rating	IP20
Power	Max. 18W / Max. 24W
Led Voltage	DC36V
Input Current	Max. 450mA/ Max. 600mA

Optical Parameters

Light Source	LED COB
Lumens	40lm/W
CRI	97Ra
CCT	3000K ● 3500K ● 4000K ○
CCT Changeable	2700K  6000K
Beam Angle	 120°
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

DZZ-04

YEXI

Yexi uses a full-spectrum high CRI light source, which is infinitely close to natural light. The light source is hidden at a depth of 60MM; Matte metal surface, the inner surface is soft and anti-dazzling; artistry and function coexist.


The aviation-grade aluminum is integrally formed through precise CNC, avoiding the complex multi-layer structure of the lamp.




DZZ-04




DZZ-04M

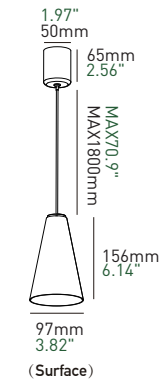

DZZ-04QT

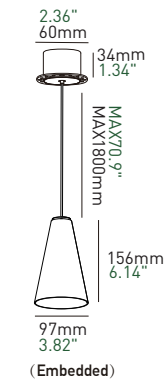

DZZ-04QTH

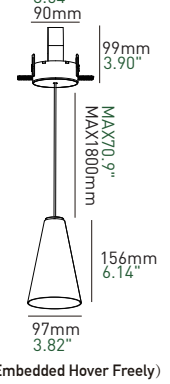

Basic Information

Model	DZZ-04
Mounting	Surface mounted
Color	White/Black
Material	Aluminum
IP Rating	IP20
Power	Max. 6W
Led Voltage	DC36V
Input Current	Max. 150mA

Optical Parameters

Light Source	LED COB
Lumens	72lm/W
CRI	98Ra
CCT	3000K ● 3500K ● 4000K ○
CCT Changeable	2700K 6000K 1800K 3000K
Beam Angle	▲ 60°
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI


DZZ-05

SAURI

Sauri, born from the modernism idea of "less is more", reconstruct the minimalist geometry into residential space, from the undefined light-emitting direction and geometric shape, to the undefined space and residents.

The LED part of the lamp adopts a unique optical reflecting design, creating bright, pure, upper and down dual lighting, anti-glare and uniform. The upper light is warm and soft, diffusing the space above and the down light is powerful. The fixture extend the ray while lighting the field.

DZZ-05

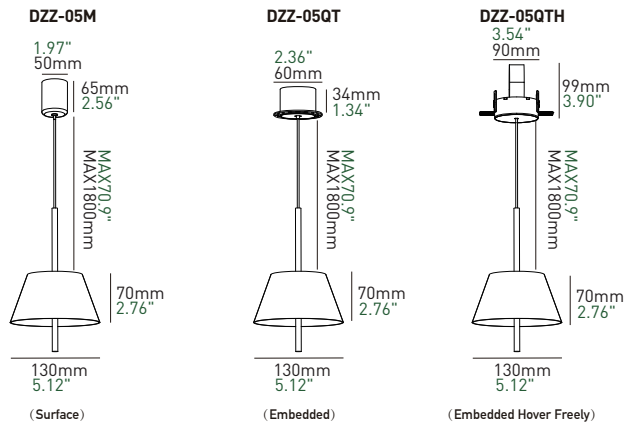

Basic Information

Model	DZZ-05
Mounting	Surface mounted
Color	Black+Golden/White+Golden
Material	Aluminum
IP Rating	IP20
Power	Upward 2W / Downward 6W
Led Voltage	DC36V
Input Current	Max. 200mA

Optical Parameters

Light Source	LED COB
Lumens	52lm/W
CRI	97Ra
CCT	3000K ● 3500K ● 4000K ○
CCT Changeable	2700K 6000K
Beam Angle	120°
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

DZZ-06



JOAER

The image of "Joaer" is taken from the Chinese character "Heng", which symbolizes the eternal Sun and the Moon that have existed since ancient times.

It is with simple but exquisite appearance, like a sculpture full of ancient flavors. The outer appearance is a combination of spraying and metal plating, creating a feeling of profound also light luxury.


The interaction between people and the zoom lens offers light the ability to be changeable.

The unique zoom function adapts to multiple lighting situations. With a bigger beam angle, the lighting is soft and comfortable; with a smaller beam angle, the light is focused and accent.



Decor Lights

DZZ-06

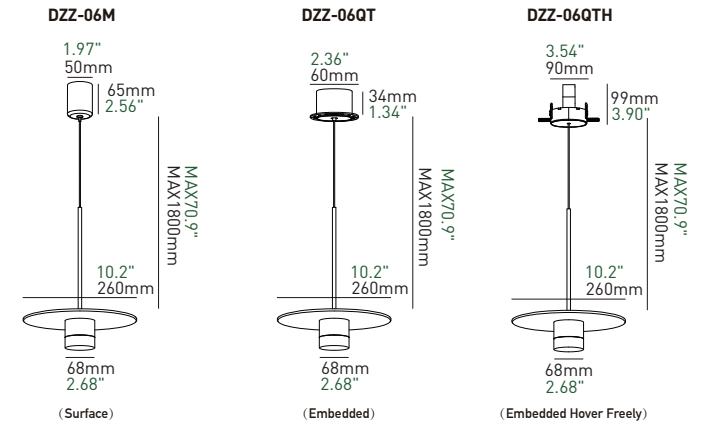

Basic Information

Model	DZZ-06
Mounting	Surface mounted
Color	Black+Golden
Material	Aluminum
IP Rating	IP20
Power	Max. 8W
Led Voltage	DC36V
Input Current	Max. 200mA

Optical Parameters

Light Source	LED COB
Lumens	60lm/W
CRI	98Ra
CCT	3000K ● 3500K ● 4000K ○
CCT Changeable	2700K — 6000K 1800K — 3000K
Beam Angle	20° - 50° Adjustable
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

NIMO Series

The image of "Joer" is taken from the Chinese character "Heng", which symbolizes the eternal Sun and the Moon that have existed since ancient times.

It is with simple but exquisite appearance, like a sculpture full of ancient flavors. The outer appearance is a combination of spraying and metal plating, creating a feeling of profound also light luxury.

The interaction between people and the zoom lens offers light the ability to be changeable.

The unique zoom function adapts to multiple lighting situations. With a bigger beam angle, the lighting is soft and comfortable; with a smaller beam angle, the light is focused and accent.



DYY-01M



DYY-01M



Decor Lights

Basic Information

Model	DYY-01M
Mounting	Surface mounted
Color	Black
Material	Aluminum
IP Rating	IP20
Power	Max. 8W
Led Voltage	DC36V
Input Current	Max. 200mA

Optical Parameters


Light Source	LED COB
Lumens	68lm/W
CRI	98Ra
CCT	3000K ● 3500K ● 4000K ○
CCT Changeable	2700K 6000K 1800K 3000K
Beam Angle	50°
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

DYY-03M



DYY-03M

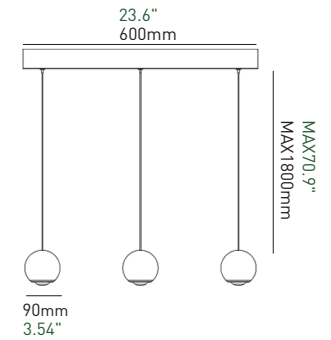

Basic Information

Model	DYY-03M
Mounting	Surface mounted
Color	Black
Material	Aluminum
IP Rating	IP20
Power	Max.8W*3
Led Voltage	DC36V
Input Current	Max. 200mA*3


Optical Parameters

Light Source	LED COB
Lumens	68lm/W
CRI	98Ra
CCT	3000K ● 3500K ● 4000K ○
CCT Changeable	2700K 6000K 1800K 3000K
Beam Angle	50°
UGR	< 13
LED Lifespan	50000hrs

Driver Voltage AC100-120V AC220-240V

Driver Options ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

DYY-03MS/05MS

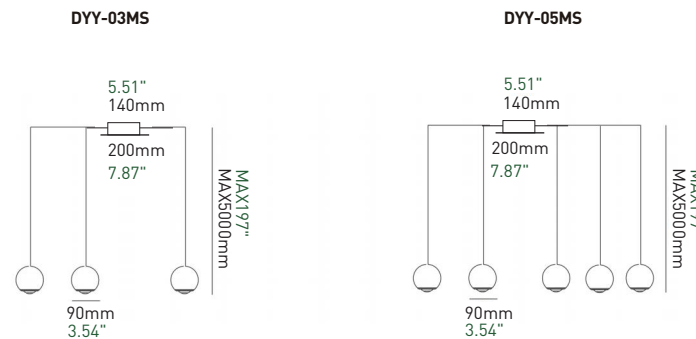

Basic Information

Model	DYY-03MS/DYY-05MS
Mounting	Surface mounted
Color	Black
Material	Aluminum
IP Rating	IP20
Power	Max. 3*8W / Max. 5*8W
Led Voltage	DC36V
Input Current	Max. 200mA*3 / Max. 200mA*5

Optical Parameters

Light Source	LED COB
Lumens	68lm/W
CRI	98Ra
CCT	3000K ● 3500K ● 4000K ○
CCT Changeable	2700K 6000K 1800K 3000K
Beam Angle	50°
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

Decor Lights

DYY-09

Galaxy




Decor Lights

DYY-09



Decor Lights

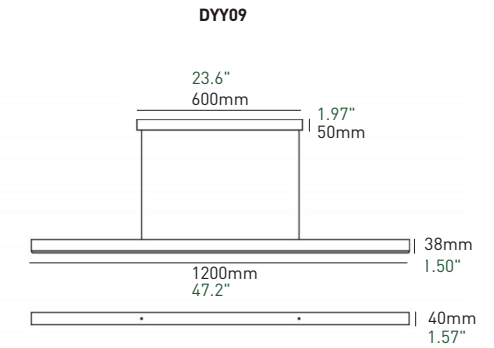

Basic Information

Model	DYY-09
Mounting	Surface mounted
Length	1.2m
Color	White/Black
Material	Aluminum
IP Rating	IP20
Power	Max.25W
Led Voltage	DC36V
Input Current	Max. 700mA

Optical Parameters

Light Source	LED COB
Lumens	55lm/W
CRI	97Ra
CCT	3000K ● 3500K ● 4000K ○
CCT Changeable	2700K 6000K
Beam Angle	▲ 120°
LED Lifespan	50000hrs


Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI



MCMQQ01




BUBBLE



MCMQQ01



MCMQQ01

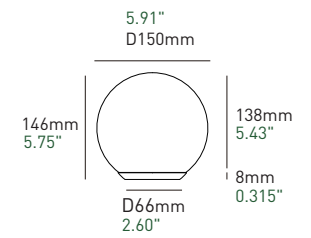

Wall Lamp

Basic Information

Model	MCMQQ01
Mounting	Surface mounted
Color	White/Black
Material	Glass
IP Rating	IP20
Power	Max.6W
LED Voltage	DC36V
Input Current	Max. 120mA

Optical Parameters

Light Source	LED COB
Lumens	51lm/W
CRI	97Ra
CCT	3000K ● 3500K ● 4000K ○
Beam Angle	120°
LED Lifespan	50000hrs

Driver Voltage AC100-120V AC220-240V

Driver Options ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI