



GK75-R03QS

GK75-R03QT



With Trim

Trimless




White



Black



Golden

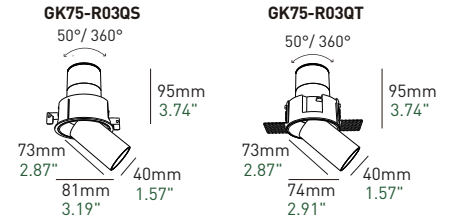

## Basic Information

Model	GK75-R03QS/R03QT
Embedded Parts	With Trim/Trimless
Mounting	Recessed
Trim Finishing Color	White/Black
Reflector Color	White/Black/Golden/ Black Mirror
Material	Pure Alu. (Heat Sink)/Die-casting Alu.
Cutout Size	75mm
Light Direction	50° 360°
IP Rating	IP20
Power	Max. 10W
Input Voltage	DC36V
Input Current	Max. 250mA

## Optical Parameters

Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra / 90Ra
CCT	3000K 3500K 4000K
CCT Changeable	2700K 6000K 1800K 3000K
Beam Angle	15° 25°
Shielding Angle	45°
UGR	< 13
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI