




GK75-R05QS



GK75-R05QT

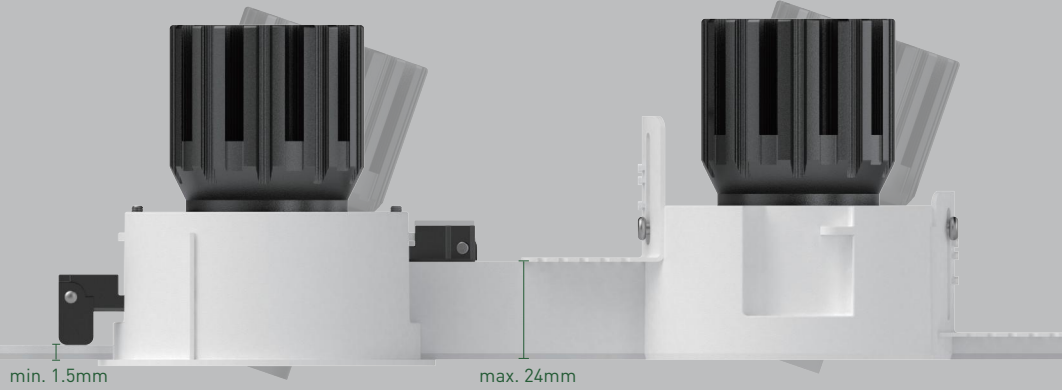


With Trim

Trimless





White



Black



Golden



Basic Information

Model	GK75-R05QS/R05QT
Embedded Parts	With Trim/Trimless
Mounting	Recessed
Trim Finishing Color	White/Black
Reflector Color	White/Black/Golden/ Black Mirror
Material	Cold Forged Pure Alu. (Heat Sink)/Die-casting Alu.
Cutout Size	∅ 75mm
Light Direction	↓ 20° ↔ 360°
IP Rating	IP20
Power	Max. 15W
Input Voltage	DC36V
Input Current	Max. 350mA

Optical Parameters

Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra / 90Ra
CCT	3000K ● 3500K ● 4000K ●
CCT Changeable	2700K — 6000K 1800K — 3000K
Beam Angle	▮ 15° ▮ 25° ▮ 35°
Shielding Angle	67°
UGR	<9
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI