



# GEEK Surface Square



GK75-S01M



GK75-S01M



## Basic Information

Model	GK75-S01M
Mounting	Surface mounted
Finishing Color	White/Black
Reflector Color	White/Black/Golden
Material	Cold Forged Pure Alu. (Heat Sink)/Die-casting Alu.
Light Direction	20° 360°
IP Rating	IP20
Power	Max. 10W
Input Voltage	DC36V
Input Current	Max. 250mA

## Optical Parameters

Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra / 90Ra
CCT	3000K 3500K 4000K
CCT Changeable	2700K 6000K 1800K 3000K
Beam Angle	15° 25° 35° 50°
Shielding Angle	50°
UGR	< 13
LED Lifespan	50000hrs




Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

# GEEK Surface Square Double



GK75-S02M

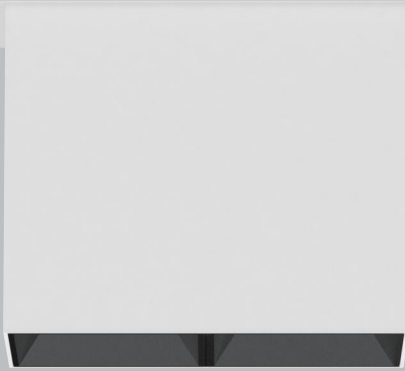


White




Black

Golden

White



Black



## Basic Information

Model	GK75-S02M
Mounting	Surface mounted
Finishing Color	White/Black
Reflector Color	White/Black/Golden
Material	Cold Forged Pure Alu. (Heat Sink)/Die-casting Alu.
Light Direction	20° / 360°
IP Rating	IP20
Power	Max. 2*10W
Input Voltage	DC36V
Input Current	Max. 2*250mA

## Optical Parameters

Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra / 90Ra
CCT	3000K ● 3500K ● 4000K ○
CCT Changeable	2700K — 6000K 1800K — 3000K
Beam Angle	15° 25° 35° 50°
Shielding Angle	50°
UGR	< 13
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI