



GEEK Surface Square IP44



GK75-S44M



GK75-S44M




Geek Family

Basic Information

Model	GK75-S44M
Mounting	Surface mounted
Finishing Color	White/Black
Reflector Color	White/Black/Golden
Material	Cold Forged Pure Alu. (Heat Sink)/Die-casting Alu.
Light Direction	Fixed
IP Rating	IP44
Power	Max. 10W
Input Voltage	DC36V
Input Current	Max. 250mA

Optical Parameters

Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra / 90Ra
CCT	3000K ● 3500K ● 4000K ●
CCT Changeable	2700K 6000K 1800K 3000K
Beam Angle	15° 25° 35° 50°
Shielding Angle	35°
UGR	< 16
LED Lifespan	50000hrs

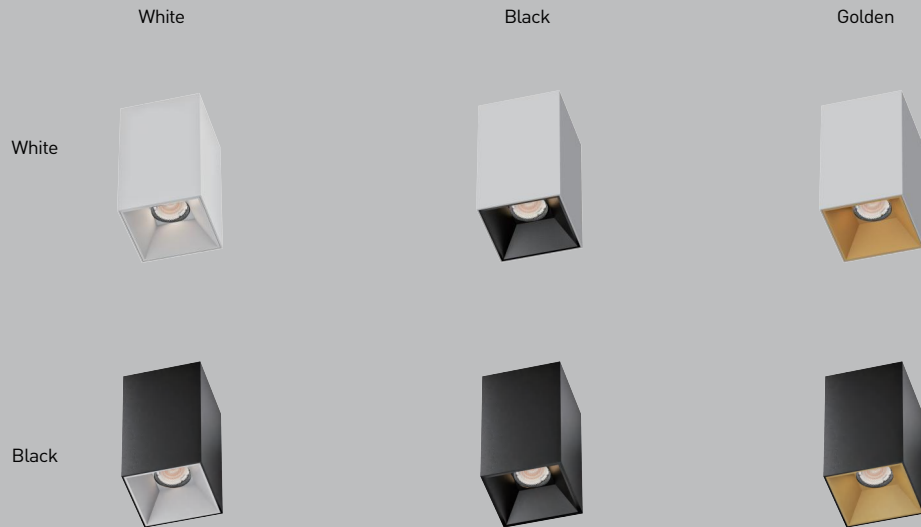


Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

GEEK Surface Square IP44 Double



GK75-S46M

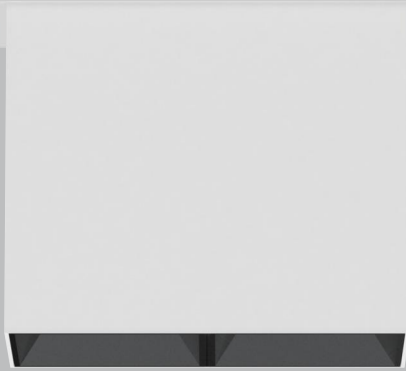

White




Black

Golden

White



Black



Basic Information

Model	GK75-S46M
Mounting	Surface mounted
Finishing Color	White/Black
Reflector Color	White/Black/Golden
Material	Cold Forged Pure Alu. (Heat Sink)/Die-casting Alu.
Light Direction	Fixed
IP Rating	IP44
Power	Max. 2*10W
Input Voltage	DC36V
Input Current	Max. 2*250mA

Optical Parameters

Light Source	LED COB
Lumens	65lm/W 90lm/W
CRI	97Ra / 90Ra
CCT	3000K ● 3500K ● 4000K ○
CCT Changeable	2700K 6000K 1800K 3000K
Beam Angle	15° 25° 35° 50°
Shielding Angle	35°
UGR	< 16
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI