




Gypsum · Concave



SG-S10QT



SG-S10QT


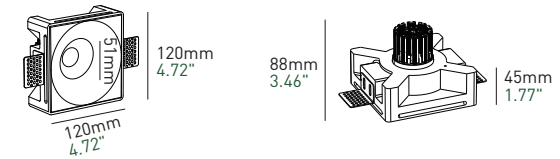


Basic Information

Model	HG-S10QT
Embedded Parts	Trimless
Mounting	Recessed
Trim Finishing Color	White
Reflector Color	White
Material	Gypsum Housing, Aluminium Light Body
Cutout Size	123*123mm
IP Rating	IP20
Power	Max. 15W
Input Voltage	DC36V
Input Current	Max. 350mA

Optical Parameters

Light Source	LED COB
Lumens	65lm/W
CRI	97Ra
CCT	3000K ● 3500K ● 4000K ○
CCT Changeable	2700K ● 6000K 1800K ● 3000K
Beam Angle	25° ▲ 60° ▲
Shielding Angle	39°
LED Lifespan	50000hrs

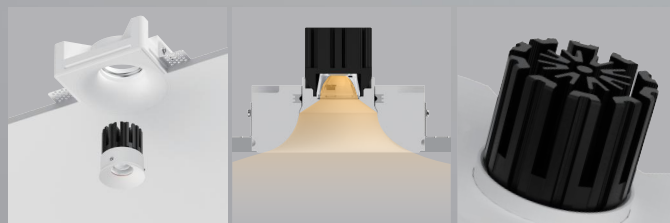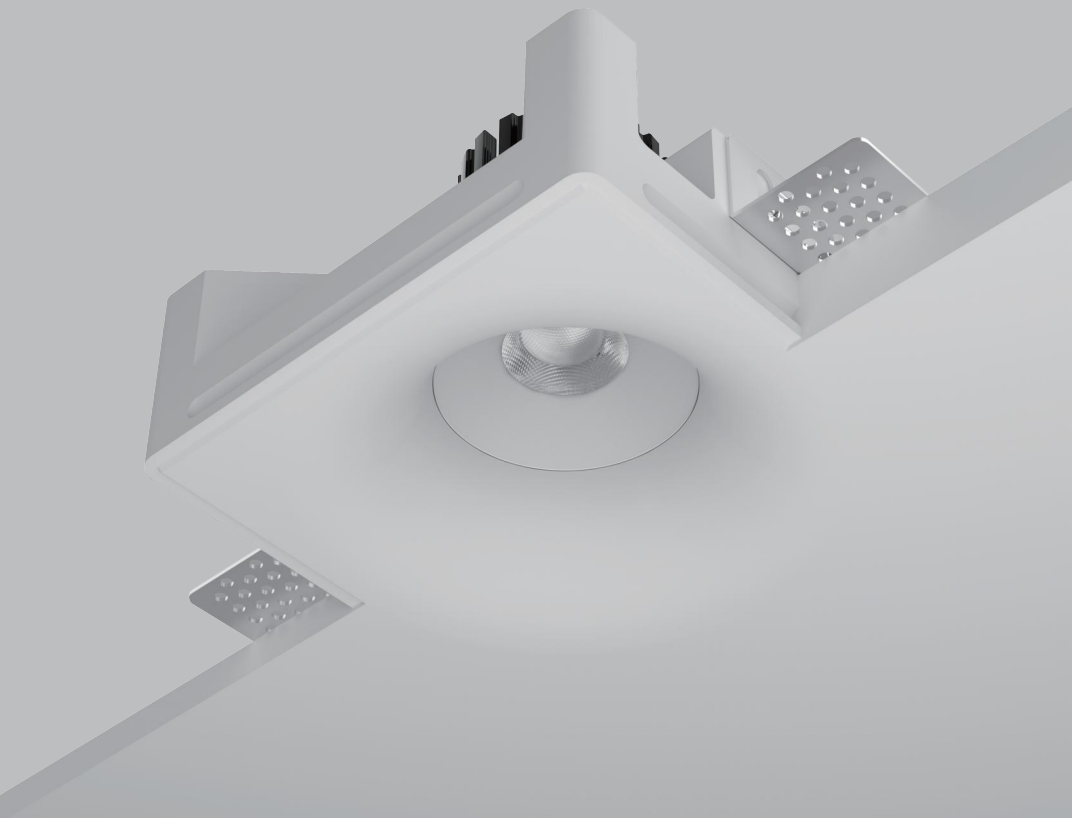

Split Design

LED COB Light Source

Cold Forged Pure Alu. Heat Sink


Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

SG-S05QT



Gypsum·Square

The minimalist design features clean, simple lines, and the curved back lines of the gypsum lamp are optimized to create an indirect lighting solution. The minimalist design style allows it to apply to many different interior designs.

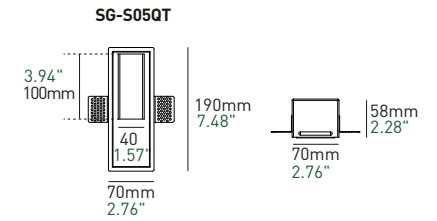

Gypsum Series

Basic Information

Model	SG-S05QT
Embedded Parts	Trimless
Mounting	Recessed
Trim Finishing Color	White
Reflector Color	White
Material	Gypsum Housing, Aluminium Light Body
Cutout Size	□L193*W73*D58
IP Rating	IP20
Power	Max. 3W
Input Voltage	DC3V
Input Current	Max. 350mA

Optical Parameters


Light Source	LED COB
Lumens	42lm/W
CRI	95Ra
CCT	3000K ● 3500K ● 4000K ○
Beam Angle	▲ 50°
Shielding Angle	/
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI

SG-S04QT




SG-S04QT

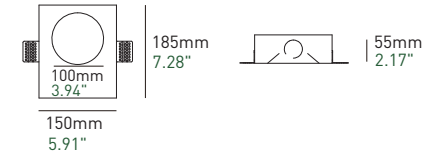

Gypsum Series

Gypsum·Circle

The lamp and the wall become a whole, and the light coming from the wall is as soft, eternal, and charming as the sunlight. The unique curved structure makes it not exposed to the light source. The installed depth of the Gypsum Lamp Circle is only 5.5 cm.



Basic Information

Model	SG-S04QT
Embedded Parts	Trimless
Mounting	Recessed
Trim Finishing Color	White
Reflector Color	White
Material	Gypsum Housing, Aluminium Light Body
Cutout Size	□L187*W153*D58
IP Rating	IP20
Power	Max. 3W
Input Voltage	DC3V
Input Current	Max. 350mA

Optical Parameters

Light Source	LED COB
Lumens	42lm/W
CRI	95Ra
CCT	3000K ● 3500K ● 4000K ○
Beam Angle	▲ 50°
Shielding Angle	/
LED Lifespan	50000hrs

Driver Voltage	AC100-120V AC220-240V
Driver Options	ON/OFF DIM TRIAC/ PHASE-CUT DIM 0/1-10V DIM DALI