



Geek Shorter with Snout





MCQJR12-R1S



MCQJR12-R1T

LED | 36V | 200mA/Max | IP20


CRI ≥ 97

CHIP / BRIDGELUX

INSTALL TYPE / RECESSED

CCT / 2700K ● 3000K ● 3500K ● 4000K ●
4500K ● 5000K ○ 5700K ●

TUNABLE WHITE / 
2700K 6000K


BEAM ANGLE / 
15° 25°

FINISHING COLOR / BLACK WHITE
REFLECTOR COLOR / BLACK BLACK MIRROR
 WHITE SILVER MIRROR
 GOLDEN MATTE SILVER

MATERIAL / DIE-CASTING ALU
(Heat sink cold-forged alu)

LUMENS / 57lm/W

POWER / 5W / 8W

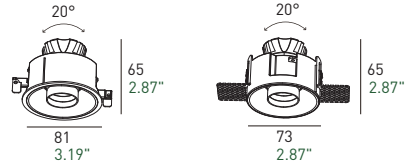

| DRIVER* | | |
|---------------------|---------------------|---------------------|
| COMMON IN | | |
| ON/OFF | 220-240V AC-50/60Hz | 100-277V AC-50/60Hz |
| CUSTOMIZE AVAILABLE | | |
| TRIAC DIM | 220-240V AC-50/60Hz | 100-277V AC-50/60Hz |
| 0-10V DIM | 220-240V AC-50/60Hz | 100-277V AC-50/60Hz |
| DALI DIM | 220-240V AC-50/60Hz | 100-277V AC-50/60Hz |