


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:110.10V I:0.1266A P:13.826W PF:0.9916 Freq:49.99Hz Lamp Flux:1382.48x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.: V10F90_3000K	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 99.99 lm/W			
MODEL	GK75-S65QS	I _{max} (cd)	1739	S/MH (C0/180)	0.79
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH (C90/270)	0.79
RATED VOLTAGE(V)	110	TOTAL FLUX(lm)	1382.5	η UP,DN(C0-180)	0.8,52.3
NOMINAL FLUX(lm)	1382.48	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.7,46.3
LAMPS INSIDE	1	η up (%)	1.5	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	110	η down (%)	98.5	CIBSE SHR MAX	0.85

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

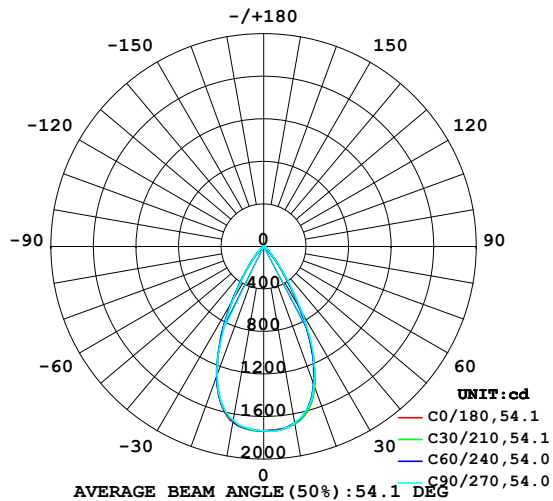

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

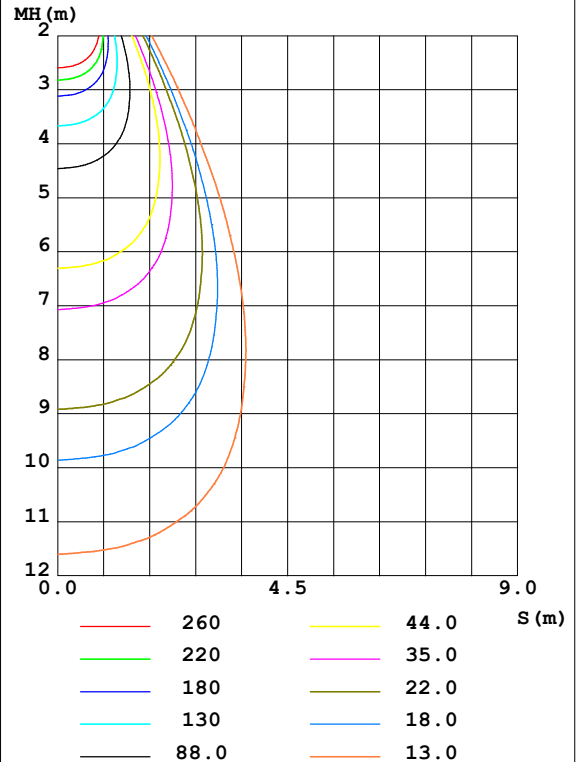

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2025-04-29

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: BXRE-30G10F4-A-83

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1692	1690	1685	1697	1678	1670	1659	1662	0- 10	163.3	163.3	11.8,11.8
20	1397	1388	1385	1401	1291	1288	1287	1273	10- 20	432.5	595.8	43.1,43.1
30	703.1	705.6	728.2	744.5	599.7	599.2	583.0	552.4	20- 30	457.1	1053	76.2,76.2
40	185.8	185.6	199.9	207.1	166.4	156.3	153.3	131.3	30- 40	227.5	1280	92.6,92.6
50	51.20	26.06	55.46	28.00	47.63	19.21	38.95	17.15	40- 50	63.69	1344	97.2,97.2
60	8.795	5.766	6.935	5.727	6.569	4.648	5.751	4.924	50- 60	11.96	1356	98.1,98.1
70	3.360	3.092	3.000	3.115	2.730	2.520	2.481	2.719	60- 70	4.091	1360	98.4,98.4
80	0.8786	0.9170	0.6907	0.9559	0.5234	0.5945	0.4380	0.6220	70- 80	1.861	1362	98.5,98.5
90	0.0958	0.0946	0.1113	0.1036	0.0934	0.0827	0.0881	0.0819	80- 90	0.2645	1362	98.5,98.5
100	0.2745	0.2655	0.2671	0.2367	0.2336	0.2218	0.2411	0.2425	90-100	0.1611	1362	98.5,98.5
110	0.9344	0.9413	0.9101	0.8653	0.8155	0.8139	0.8382	0.8713	100-110	0.5274	1363	98.6,98.6
120	2.373	2.392	2.337	2.279	2.175	2.184	2.213	2.278	110-120	1.491	1364	98.7,98.7
130	4.388	4.423	4.349	4.287	4.127	4.130	4.171	4.261	120-130	2.893	1367	98.9,98.9
140	6.496	6.538	6.480	6.384	6.122	6.094	6.184	6.269	130-140	4.094	1371	99.2,99.2
150	7.959	8.040	8.089	7.897	7.465	7.446	7.584	7.648	140-150	4.457	1376	99.5,99.5
160	8.087	8.256	8.431	8.162	7.595	7.667	7.858	7.819	150-160	3.689	1380	99.8,99.8
170	7.597	7.665	7.683	7.515	7.241	7.179	7.259	7.298	160-170	2.196	1382	99.9,99.9
180	7.512	7.585	7.521	7.575	7.540	7.584	7.513	7.576	170-180	0.7071	1382	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2025-04-29

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: BXRE-30G10F4-A-83

LUMINANCE LIMITATION CURVES

Test:U:110.10V I:0.1266A P:13.826W PF:0.9916 Freq:49.99Hz Lamp Flux:1382.48x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:BXRH-30V10F4-A-8X	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

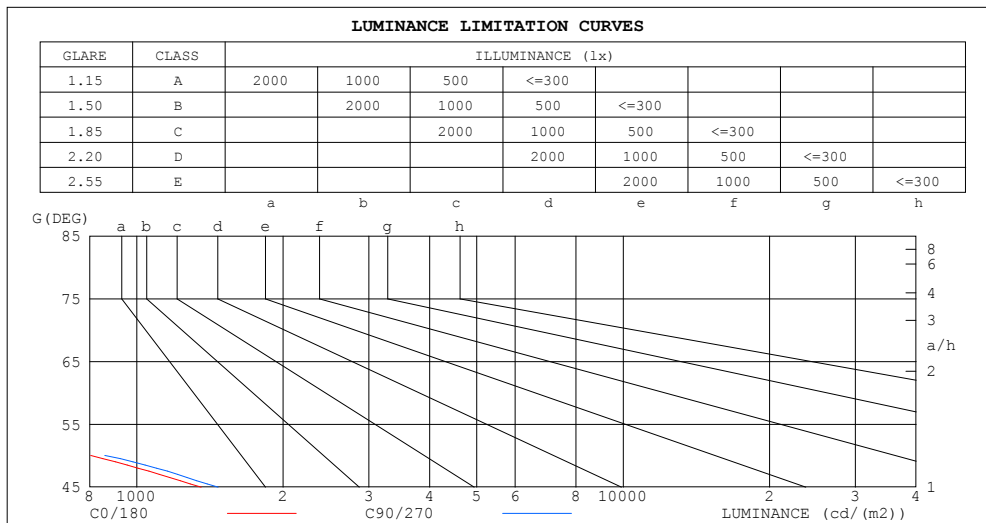

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	38	16
80	51	40
75	86	67
70	99	87
65	117	102
60	178	138
55	358	281
50	804	860
45	1355	1469

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2025-04-29

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: BXRE-30G10F4-A-83

```

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: BXRE-30G10F4-A-83

```

WEC AND CCEC

Test:U:110.10V I:0.1266A P:13.826W PF:0.9916 Freq:49.99Hz Lamp Flux:1382.48x1 lm					
NAME:		TYPE:COB		WEIGHT:	
SPEC.:BXRH-30V10F4-A-8X		DIM.: 9mm		SERIAL No.:	
MFR.: Hangzhou XRZLux Co.,Ltd		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.173	.099	.031	.166	.095	.030	.153	.088	.028	.140	.081	.026	.129	.075	.024	
2.0	.165	.091	.028	.159	.088	.027	.148	.082	.026	.138	.077	.024	.128	.072	.023	
3.0	.157	.084	.025	.152	.081	.025	.142	.077	.023	.133	.073	.022	.125	.069	.021	
4.0	.150	.078	.023	.145	.076	.022	.137	.073	.022	.129	.069	.021	.122	.066	.020	
5.0	.143	.073	.021	.139	.071	.021	.131	.068	.020	.124	.066	.020	.118	.063	.019	
6.0	.136	.068	.020	.133	.067	.019	.126	.065	.019	.120	.062	.018	.114	.060	.018	
7.0	.130	.064	.018	.127	.063	.018	.121	.061	.018	.116	.059	.017	.111	.058	.017	
8.0	.125	.061	.017	.122	.060	.017	.117	.058	.017	.112	.057	.016	.107	.055	.016	
9.0	.119	.058	.016	.117	.057	.016	.112	.056	.016	.108	.054	.015	.104	.053	.015	
10.0	.115	.055	.015	.112	.054	.015	.108	.053	.015	.104	.052	.015	.100	.050	.014	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.202	.202	.202	.172	.172	.172	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.182	.169	.156	.156	.145	.135	.107	.100	.093	.061	.058	.054	.020	.019	.018	
2.0	.167	.144	.125	.143	.124	.108	.098	.086	.075	.056	.050	.044	.018	.016	.014	
3.0	.154	.125	.102	.132	.108	.088	.091	.075	.062	.052	.044	.036	.017	.014	.012	
4.0	.144	.110	.085	.123	.095	.073	.085	.066	.052	.049	.039	.031	.016	.013	.010	
5.0	.135	.099	.072	.116	.085	.062	.080	.060	.044	.046	.035	.026	.015	.011	.009	
6.0	.127	.089	.062	.110	.077	.054	.076	.054	.038	.044	.032	.023	.014	.010	.007	
7.0	.121	.082	.054	.104	.071	.047	.072	.050	.033	.042	.029	.020	.013	.010	.007	
8.0	.115	.075	.048	.099	.065	.042	.069	.046	.030	.040	.027	.018	.013	.009	.006	
9.0	.110	.070	.043	.095	.061	.038	.066	.043	.027	.038	.025	.016	.012	.008	.005	
10.0	.106	.066	.039	.091	.057	.034	.063	.040	.024	.037	.024	.015	.012	.008	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2025-04-29

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: BXRE-30G10F4-A-83

UGR(Unified Glare Rating) Table

Test:U:110.10V I:0.1266A P:13.826W PF:0.9916 Freq:49.99Hz Lamp Flux:1382.48x1 lm										
NAME:					TYPE:COB			WEIGHT:		
SPEC.:BXRH-30V10F4-A-8X					DIM.: 9mm			SERIAL No.:		
MFR.: Hangzhou XRZLux Co.,Ltd					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	7.6	8.5	7.9	8.7	8.9	7.6	8.5	7.8	8.7	8.9
3H	7.5	8.3	7.8	8.5	8.8	7.4	8.3	7.7	8.5	8.7
4H	7.4	8.2	7.7	8.4	8.7	7.4	8.1	7.6	8.4	8.6
6H	7.3	8.1	7.6	8.3	8.6	7.3	8.0	7.6	8.3	8.5
8H	7.3	8.0	7.6	8.3	8.5	7.2	7.9	7.5	8.2	8.5
12H	7.2	7.9	7.6	8.2	8.5	7.2	7.8	7.5	8.1	8.4
4H 2H	7.4	8.2	7.7	8.4	8.7	7.3	8.1	7.6	8.4	8.6
3H	7.2	7.9	7.6	8.2	8.5	7.2	7.9	7.5	8.1	8.5
4H	7.1	7.8	7.5	8.1	8.4	7.1	7.7	7.5	8.0	8.4
6H	7.1	7.6	7.5	8.0	8.3	7.0	7.5	7.4	7.9	8.3
8H	7.0	7.5	7.4	7.9	8.3	6.9	7.4	7.4	7.8	8.2
12H	7.0	7.4	7.4	7.8	8.2	6.9	7.3	7.3	7.7	8.2
8H 4H	7.0	7.5	7.4	7.9	8.3	6.9	7.4	7.4	7.8	8.2
6H	6.9	7.3	7.4	7.7	8.2	6.8	7.3	7.3	7.7	8.1
8H	6.9	7.2	7.3	7.7	8.1	6.8	7.2	7.3	7.6	8.1
12H	6.8	7.1	7.3	7.6	8.1	6.7	7.0	7.2	7.5	8.0
12H 4H	6.9	7.4	7.4	7.8	8.2	6.9	7.3	7.3	7.7	8.2
6H	6.9	7.2	7.3	7.7	8.1	6.8	7.2	7.3	7.6	8.1
8H	6.8	7.1	7.3	7.6	8.1	6.7	7.0	7.2	7.5	8.0
Variations with the observer position at spacings:										
S = 1.0H	+ 3.2 / - 9.7					+ 3.4 / -11.0				
1.5H	+ 5.2 / - 9.8					+ 5.4 / -11.0				
2.0H	+ 6.6 / - 6.8					+ 7.5 / - 7.2				

CIE Pub.117, 1382 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.1)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2025-04-29

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: BXRE-30G10F4-A-83

UTILIZATION FACTORS TABLE

Test:U:110.10V I:0.1266A P:13.826W PF:0.9916 Freq:49.99Hz Lamp Flux:1382.48x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:BXRH-30V10F4-A-8X	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	87	81	77	86	80	77	86	80	77	73
0.80	94	89	85	94	88	85	92	87	84	80
1.00	99	93	90	98	93	89	96	92	89	85
1.25	103	98	94	102	97	94	100	96	93	89
1.50	106	101	98	104	100	97	102	98	96	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	106	104	106	104	102	95
4.00	113	111	108	111	109	107	107	106	104	97
5.00	115	112	111	112	110	109	108	107	106	97
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2025-04-29

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: BXRE-30G10F4-A-83

ISOCANDELA DIAGRAM

Test:U:110.10V I:0.1266A P:13.826W PF:0.9916 Freq:49.99Hz Lamp Flux:1382.48x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:BXRH-30V10F4-A-8X	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

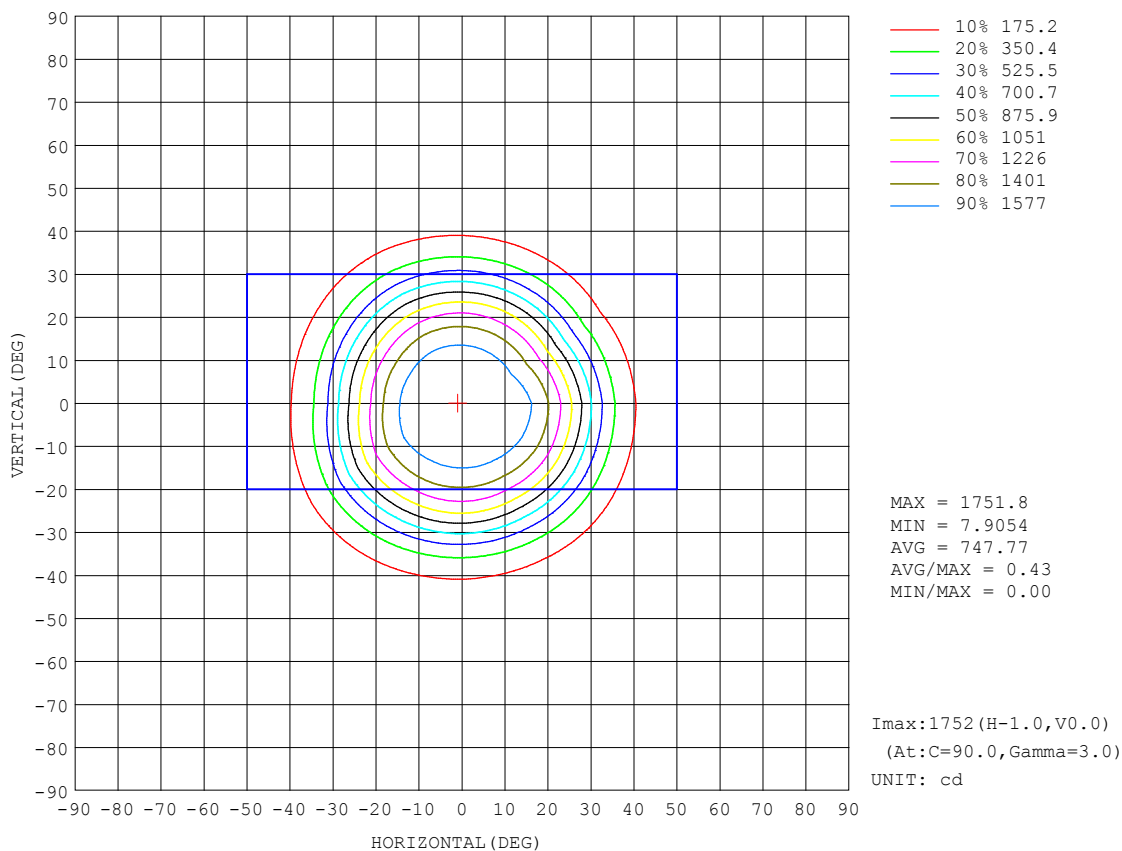


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2025-04-29

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: BXRE-30G10F4-A-83

AAI Figure

Test:U:110.10V I:0.1266A P:13.826W PF:0.9916 Freq:49.99Hz Lamp Flux:1382.48x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:BXRH-30V10F4-A-8X	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

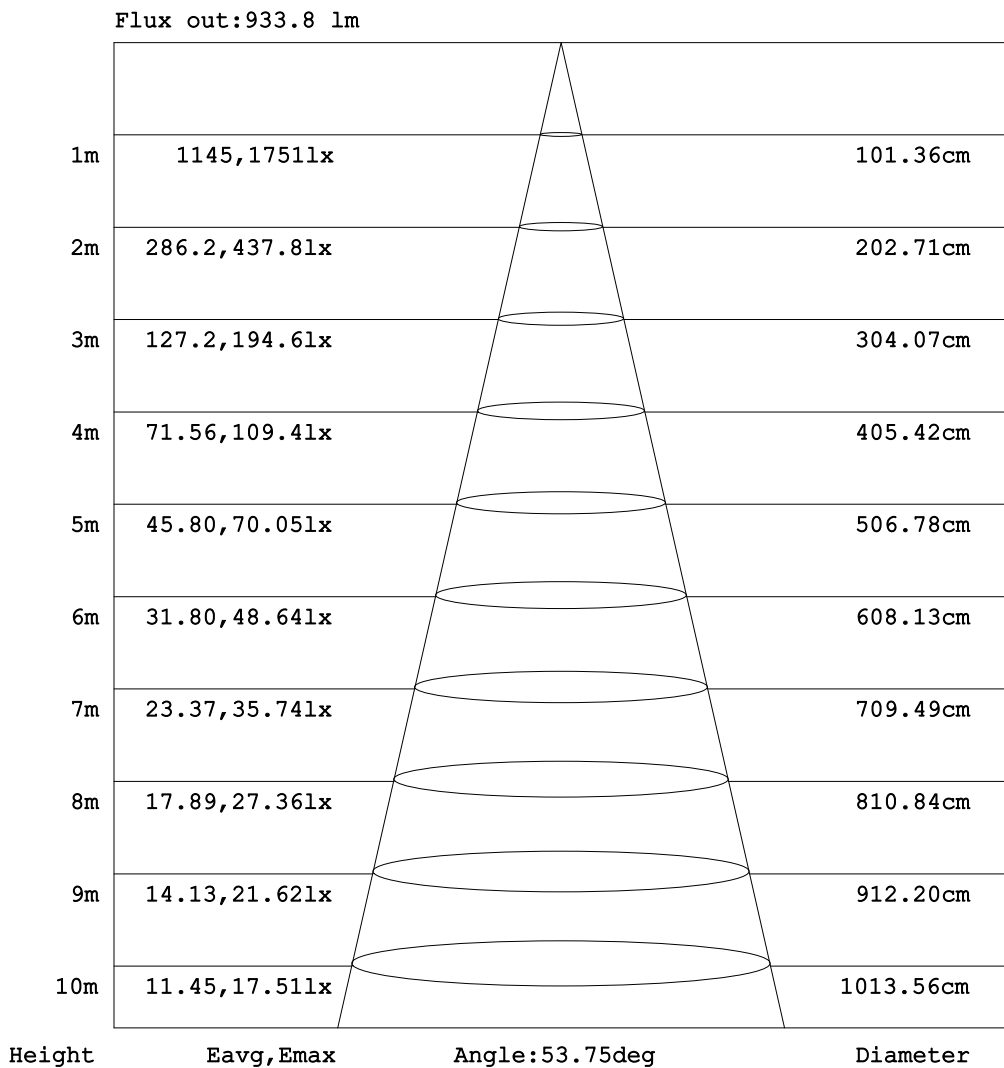


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2025-04-29

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: BXRE-30G10F4-A-83

ISOLUX DIAGRAM

Test:U:110.10V I:0.1266A P:13.826W PF:0.9916 Freq:49.99Hz Lamp Flux:1382.48x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:BXRH-30V10F4-A-8X	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

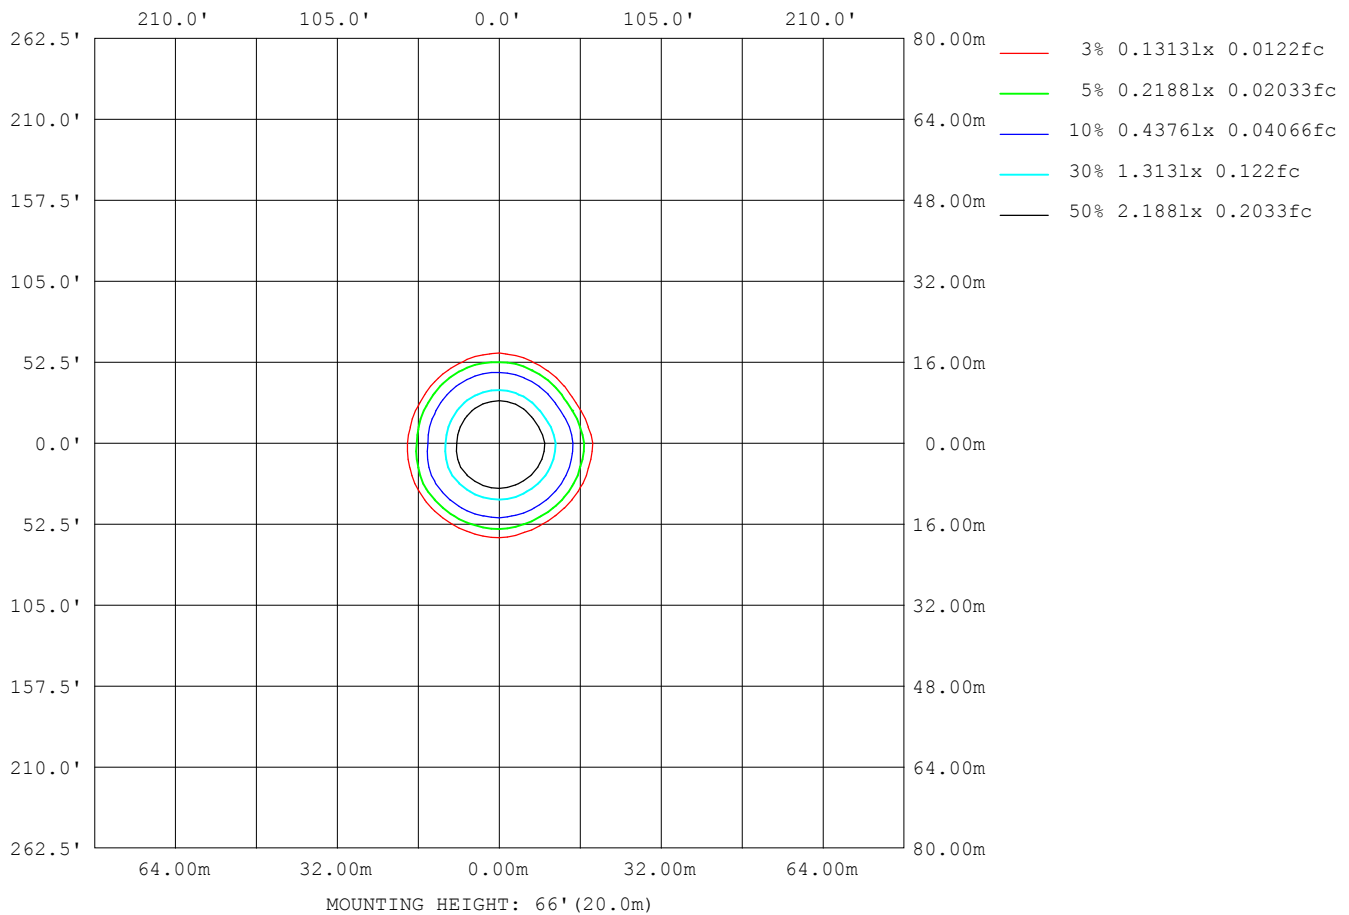

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2025-04-29

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: BXRE-30G10F4-A-83

LED Avg.L Report

Test:U:110.10V I:0.1266A P:13.826W PF:0.9916 Freq:49.99Hz Lamp Flux:1382.48x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:BXRH-30V10F4-A-8X	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	104
L_0~180 (75) av	76
L_0~180 (85) av	29
L_90~270 (65) av	96
L_90~270 (75) av	59
L_90~270 (85) av	15
L_45 (65) av	94
L_45 (75) av	68
L_45 (85) av	15

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:2025-04-29

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:4.234m [K=1.0000]
 Remarks: BXRE-30G10F4-A-83

Planar Illuminance Curve

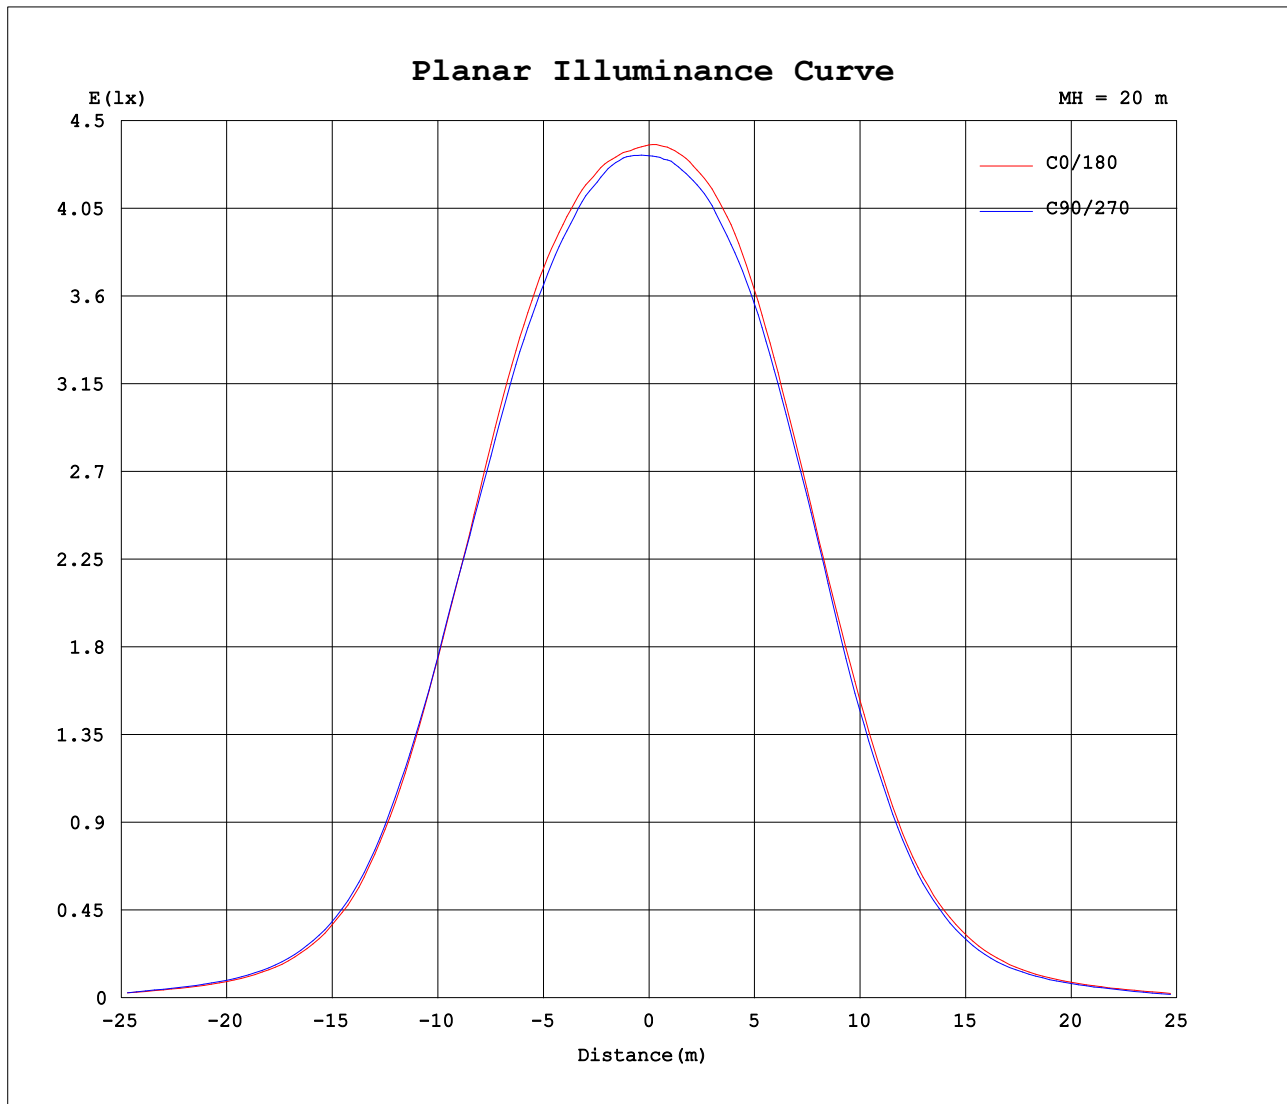

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-04-29

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 4.234m [K=1.0000]
 Remarks: BXRE-30G10F4-A-83

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:110.10V I:0.1266A P:13.826W PF:0.9916 Freq:49.99Hz Lamp Flux:1382.48x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:BXRH-30V10F4-A-8X	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1734	1734	1734	1734	1734	1734	1734	1734	1734	1734	1734	1734							
5	1724	1729	1729	1734	1730	1738	1726	1727	1720	1717	1715	1721							
10	1692	1695	1684	1685	1689	1704	1678	1672	1667	1659	1661	1664							
15	1599	1601	1583	1583	1587	1607	1540	1528	1536	1531	1523	1524							
20	1397	1404	1372	1385	1396	1406	1291	1281	1296	1287	1273	1272							
25	1079	1096	1070	1097	1099	1118	956	947	964	939	929	917							
30	703	716	695	728	735	754	600	592	606	583	556	549							
35	376	388	377	399	414	427	322	319	324	308	284	273							
40	186	187	184	200	204	210	166	156	157	153	136	126							
45	94.9	81.3	70.9	104	83.6	82.8	90.5	55.1	55.3	84.0	49.0	45.3							
50	51.2	28.8	23.3	55.5	29.7	26.3	47.6	19.2	19.2	39.0	17.6	16.7							
55	20.4	10.8	8.93	16.2	10.3	9.46	15.0	7.49	7.32	12.2	7.98	7.85							
60	8.80	6.09	5.44	6.93	5.79	5.67	6.57	4.64	4.66	5.75	4.90	4.95							
65	4.90	4.35	4.19	4.31	4.19	4.18	3.88	3.67	3.63	3.76	3.89	3.93							
70	3.36	3.26	2.93	3.00	3.05	3.18	2.73	2.60	2.44	2.48	2.66	2.77							
75	2.19	2.10	1.73	1.74	1.88	2.12	1.72	1.59	1.39	1.33	1.51	1.69							
80	0.88	1.11	0.73	0.69	0.80	1.11	0.52	0.72	0.46	0.44	0.51	0.73							
85	0.33	0.26	0.15	0.14	0.11	0.16	0.18	0.13	0.13	0.12	0.09	0.08							
90	0.10	0.09	0.10	0.11	0.13	0.08	0.09	0.08	0.08	0.09	0.08	0.08							
95	0.15	0.14	0.14	0.15	0.13	0.13	0.14	0.12	0.12	0.13	0.13	0.13							
100	0.27	0.27	0.27	0.27	0.24	0.23	0.23	0.22	0.22	0.24	0.24	0.25							
105	0.51	0.51	0.51	0.50	0.47	0.45	0.44	0.44	0.43	0.45	0.46	0.47							
110	0.93	0.93	0.95	0.91	0.88	0.85	0.82	0.82	0.81	0.84	0.86	0.88							
115	1.56	1.56	1.59	1.53	1.49	1.46	1.40	1.41	1.39	1.43	1.46	1.49							
120	2.37	2.37	2.41	2.34	2.29	2.26	2.18	2.20	2.17	2.21	2.26	2.30							
125	3.33	3.34	3.39	3.29	3.25	3.22	3.10	3.13	3.10	3.14	3.20	3.25							
130	4.39	4.40	4.45	4.35	4.30	4.27	4.13	4.14	4.12	4.17	4.24	4.28							
135	5.47	5.49	5.54	5.43	5.38	5.34	5.16	5.15	5.14	5.21	5.29	5.32							
140	6.50	6.51	6.57	6.48	6.42	6.35	6.12	6.10	6.09	6.18	6.26	6.28							
145	7.36	7.38	7.45	7.41	7.31	7.22	6.92	6.88	6.90	7.00	7.06	7.10							
150	7.96	8.01	8.07	8.09	7.96	7.83	7.47	7.43	7.46	7.58	7.63	7.67							
155	8.19	8.26	8.39	8.42	8.29	8.11	7.67	7.67	7.75	7.86	7.91	7.87							
160	8.09	8.16	8.35	8.43	8.25	8.07	7.60	7.61	7.73	7.86	7.90	7.74							
165	7.84	7.94	8.01	8.12	7.93	7.81	7.42	7.36	7.47	7.64	7.63	7.48							
170	7.60	7.67	7.66	7.68	7.51	7.52	7.24	7.20	7.16	7.26	7.31	7.29							
175	7.45	7.54	7.64	7.49	7.43	7.48	7.27	7.31	7.28	7.24	7.42	7.39							
180	7.51	7.58	7.59	7.52	7.54	7.61	7.54	7.56	7.61	7.51	7.55	7.60							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2025-04-29

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: BXRE-30G10F4-A-83