


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:217.72V I:0.1327A P:26.565W PF:0.9194 Freq:49.99Hz Lamp Flux:2359.49x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 88.82 lm/W			
MODEL	GK75-S01QS2_T2	I _{max} (cd)	5229	S/MH (C0/180)	0.69
NOMINAL POWER(W)	2x15	LOR(%)	100.0	S/MH (C90/270)	0.59
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	2359.5	η UP,DN(C0-180)	0.8,51.2
NOMINAL FLUX(lm)	2359.49	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.7,47.3
LAMPS INSIDE	1	η up (%)	1.5	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	220	η down (%)	98.5	CIBSE SHR MAX	0.65

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

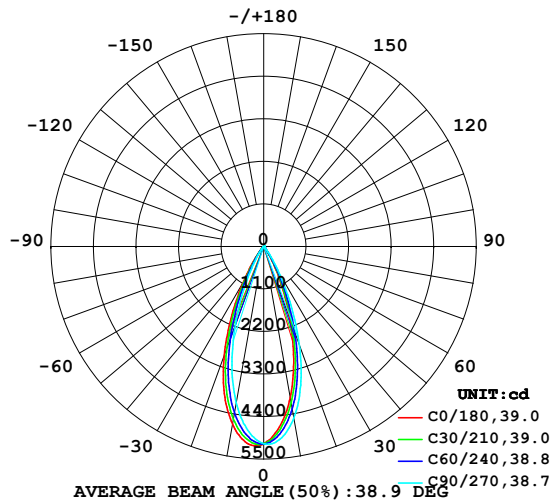

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

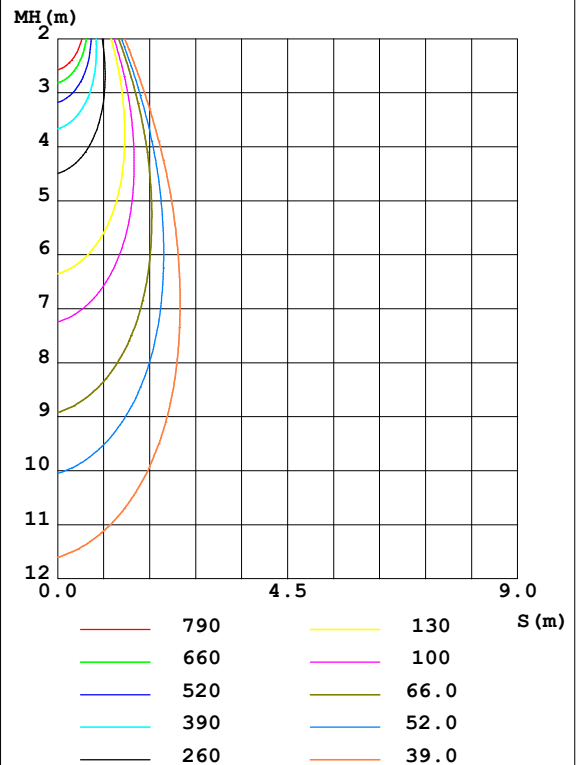

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3968	4181	4505	4759	4661	4450	4106	3862	0- 10	448.1	448.1	19,19
20	1972	2237	2701	3121	2991	2656	2148	1849	10- 20	945.6	1394	59.1,59.1
30	474.4	597.1	850.5	1128	1039	816.4	536.4	425.6	20- 30	683.5	2077	88,88
40	36.70	90.87	105.7	186.4	132.0	126.5	40.45	60.95	30- 40	205.9	2283	96.8,96.8
50	6.862	11.13	11.00	16.27	11.62	12.34	6.978	9.071	40- 50	29.20	2312	98,98
60	4.521	4.654	4.566	4.754	4.143	4.356	4.372	4.695	50- 60	6.046	2318	98.3,98.3
70	1.818	2.060	2.010	2.347	1.906	1.985	1.724	1.739	60- 70	3.211	2322	98.4,98.4
80	0.6619	0.7657	0.8235	0.9783	0.7997	0.7661	0.6276	0.5683	70- 80	1.397	2323	98.5,98.5
90	0.0953	0.1057	0.1019	0.1156	0.1076	0.1107	0.1096	0.1135	80- 90	0.3806	2323	98.5,98.5
100	0.3176	0.2752	0.2040	0.1761	0.1487	0.1791	0.2062	0.2594	90-100	0.1558	2323	98.5,98.5
110	1.525	1.271	0.9505	0.7566	0.5516	0.6779	0.9481	1.173	100-110	0.5309	2324	98.5,98.5
120	4.663	4.092	3.326	2.888	2.298	2.676	3.428	3.953	110-120	2.000	2326	98.6,98.6
130	9.030	8.545	7.621	6.719	5.722	6.340	7.448	8.254	120-130	4.742	2331	98.8,98.8
140	13.99	13.36	12.84	11.62	10.69	11.12	12.23	13.01	130-140	7.634	2338	99.1,99.1
150	15.93	16.08	15.95	15.29	14.18	14.67	15.47	15.47	140-150	8.782	2347	99.5,99.5
160	14.59	15.38	16.31	15.99	14.76	14.81	14.83	14.51	150-160	7.217	2354	99.8,99.8
170	11.64	12.41	13.11	13.21	12.36	12.19	11.99	11.48	160-170	3.972	2358	100,100
180	10.88	11.25	11.28	11.38	10.94	11.24	11.24	11.38	170-180	1.116	2359	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:217.72V I:0.1327A P:26.565W PF:0.9194 Freq:49.99Hz Lamp Flux:2359.49x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

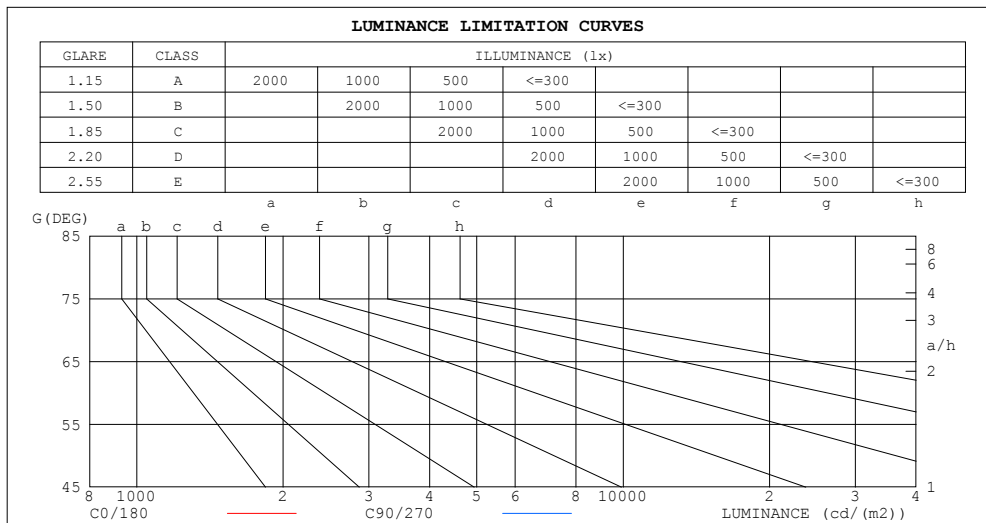

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	23	44
80	39	47
75	47	52
70	55	58
65	61	72
60	93	90
55	86	94
50	110	169
45	182	245


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:217.72V I:0.1327A P:26.565W PF:0.9194 Freq:49.99Hz Lamp Flux:2359.49x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

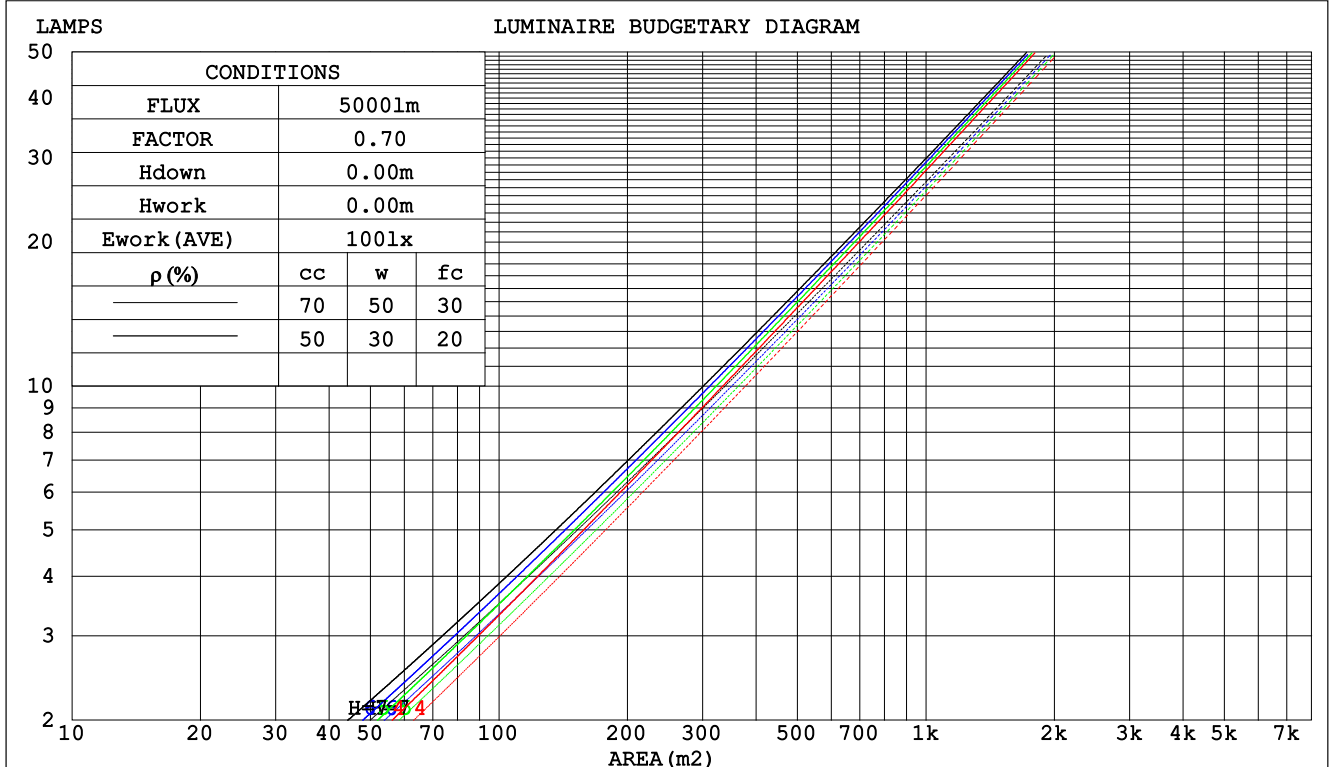

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:2026-04-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:4.234m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:217.72V I:0.1327A P:26.565W PF:0.9194 Freq:49.99Hz Lamp Flux:2359.49x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.156	.089	.028	.149	.085	.027	.136	.078	.025	.124	.071	.023	.112	.065	.021		
2.0	.147	.081	.025	.141	.078	.024	.130	.072	.022	.120	.067	.021	.110	.062	.020		
3.0	.139	.074	.022	.134	.072	.022	.124	.067	.020	.115	.063	.019	.107	.059	.018		
4.0	.131	.068	.020	.127	.067	.020	.119	.063	.019	.111	.060	.018	.104	.057	.017		
5.0	.125	.064	.018	.121	.062	.018	.114	.059	.017	.107	.057	.017	.101	.054	.016		
6.0	.119	.060	.017	.116	.058	.017	.109	.056	.016	.104	.054	.016	.098	.052	.015		
7.0	.114	.056	.016	.111	.055	.016	.105	.053	.015	.100	.051	.015	.095	.049	.015		
8.0	.109	.053	.015	.106	.052	.015	.101	.051	.014	.097	.049	.014	.092	.047	.014		
9.0	.104	.050	.014	.102	.050	.014	.098	.048	.014	.093	.047	.013	.089	.045	.013		
10.0	.100	.048	.013	.098	.047	.013	.094	.046	.013	.090	.045	.013	.087	.044	.013		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.202	.202	.202	.173	.173	.173	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.181	.169	.158	.155	.145	.136	.106	.100	.094	.061	.058	.055	.020	.019	.018	
2.0	.165	.144	.127	.141	.124	.110	.097	.086	.077	.056	.050	.045	.018	.016	.015	
3.0	.151	.125	.105	.130	.108	.091	.089	.075	.064	.051	.044	.038	.017	.014	.012	
4.0	.140	.110	.088	.120	.095	.076	.082	.066	.054	.048	.039	.032	.015	.013	.010	
5.0	.130	.098	.075	.112	.085	.065	.077	.059	.046	.045	.035	.027	.014	.011	.009	
6.0	.122	.089	.065	.105	.077	.056	.072	.054	.040	.042	.032	.024	.014	.010	.008	
7.0	.115	.081	.057	.099	.070	.050	.069	.049	.035	.040	.029	.021	.013	.009	.007	
8.0	.109	.075	.051	.094	.065	.044	.065	.045	.031	.038	.027	.019	.012	.009	.006	
9.0	.104	.069	.046	.090	.060	.040	.062	.042	.028	.036	.025	.017	.012	.008	.006	
10.0	.099	.065	.041	.086	.056	.036	.059	.039	.026	.035	.023	.015	.011	.008	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:217.72V I:0.1327A P:26.565W PF:0.9194 Freq:49.99Hz Lamp Flux:2359.49x1 lm										
NAME:					TYPE:COB			WEIGHT:		
SPEC.:3000K					DIM.: 9mm			SERIAL No.:		
MFR.: Hangzhou XRZLux Co.,Ltd					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	-0.7	0.1	-0.5	0.3	0.4	1.8	2.6	2.0	2.8	3.0
3H	-0.8	-0.1	-0.6	0.1	0.3	1.7	2.4	1.9	2.6	2.8
4H	-0.9	-0.2	-0.6	0.0	0.3	1.6	2.3	1.9	2.5	2.7
6H	-1.0	-0.4	-0.7	-0.1	0.2	1.5	2.1	1.8	2.4	2.7
8H	-1.0	-0.4	-0.7	-0.1	0.1	1.5	2.1	1.8	2.4	2.6
12H	-1.1	-0.5	-0.7	-0.2	0.1	1.4	2.0	1.8	2.3	2.6
4H 2H	-0.9	-0.2	-0.6	-0.0	0.2	1.6	2.3	1.9	2.5	2.7
3H	-1.1	-0.5	-0.7	-0.2	0.1	1.4	2.0	1.8	2.3	2.6
4H	-1.1	-0.6	-0.8	-0.3	0.0	1.3	1.9	1.7	2.2	2.5
6H	-1.2	-0.8	-0.8	-0.4	-0.0	1.2	1.7	1.6	2.1	2.4
8H	-1.3	-0.8	-0.9	-0.5	-0.1	1.2	1.6	1.6	2.0	2.4
12H	-1.3	-0.9	-0.9	-0.5	-0.1	1.1	1.5	1.6	1.9	2.4
8H 4H	-1.3	-0.8	-0.9	-0.5	-0.1	1.2	1.6	1.6	2.0	2.4
6H	-1.4	-1.0	-0.9	-0.6	-0.1	1.1	1.4	1.5	1.9	2.3
8H	-1.4	-1.1	-1.0	-0.7	-0.2	1.0	1.3	1.5	1.8	2.3
12H	-1.5	-1.2	-1.0	-0.7	-0.2	1.0	1.2	1.5	1.7	2.2
12H 4H	-1.3	-0.9	-0.9	-0.5	-0.1	1.1	1.5	1.6	1.9	2.3
6H	-1.4	-1.1	-1.0	-0.7	-0.2	1.0	1.3	1.5	1.8	2.3
8H	-1.5	-1.2	-1.0	-0.7	-0.2	1.0	1.2	1.5	1.7	2.2
Variations with the observer position at spacings:										
S = 1.0H	+ 2.7 / - 7.2					+ 4.4 / -10.3				
1.5H	+ 5.2 / - 6.7					+ 7.1 / - 9.1				
2.0H	+ 2.0 / - 1.1					+ 4.2 / - 2.1				

CIE Pub.117, 2359 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 3.0)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:217.72V I:0.1327A P:26.565W PF:0.9194 Freq:49.99Hz Lamp Flux:2359.49x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	90	84	80	89	84	80	88	83	80	77
0.80	97	91	88	96	91	88	95	90	87	84
1.00	101	95	92	100	95	92	98	94	91	87
1.25	104	99	96	103	99	96	101	97	95	91
1.50	107	102	99	105	101	99	103	100	97	93
2.00	109	105	102	107	104	101	105	102	100	94
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	106	104	103	96
4.00	114	111	109	112	110	108	108	106	105	97
5.00	115	113	111	113	111	110	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:217.72V I:0.1327A P:26.565W PF:0.9194 Freq:49.99Hz Lamp Flux:2359.49x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

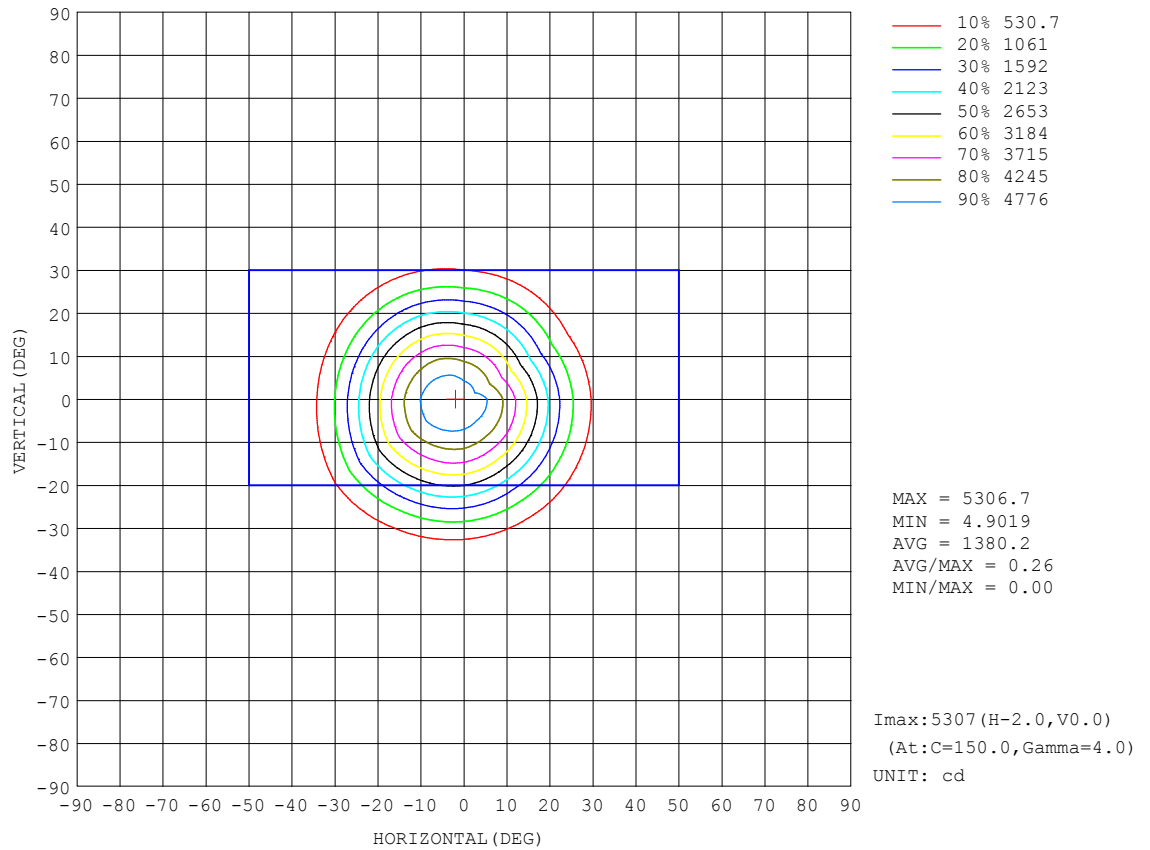


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

AAI Figure

Test:U:217.72V I:0.1327A P:26.565W PF:0.9194 Freq:49.99Hz Lamp Flux:2359.49x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

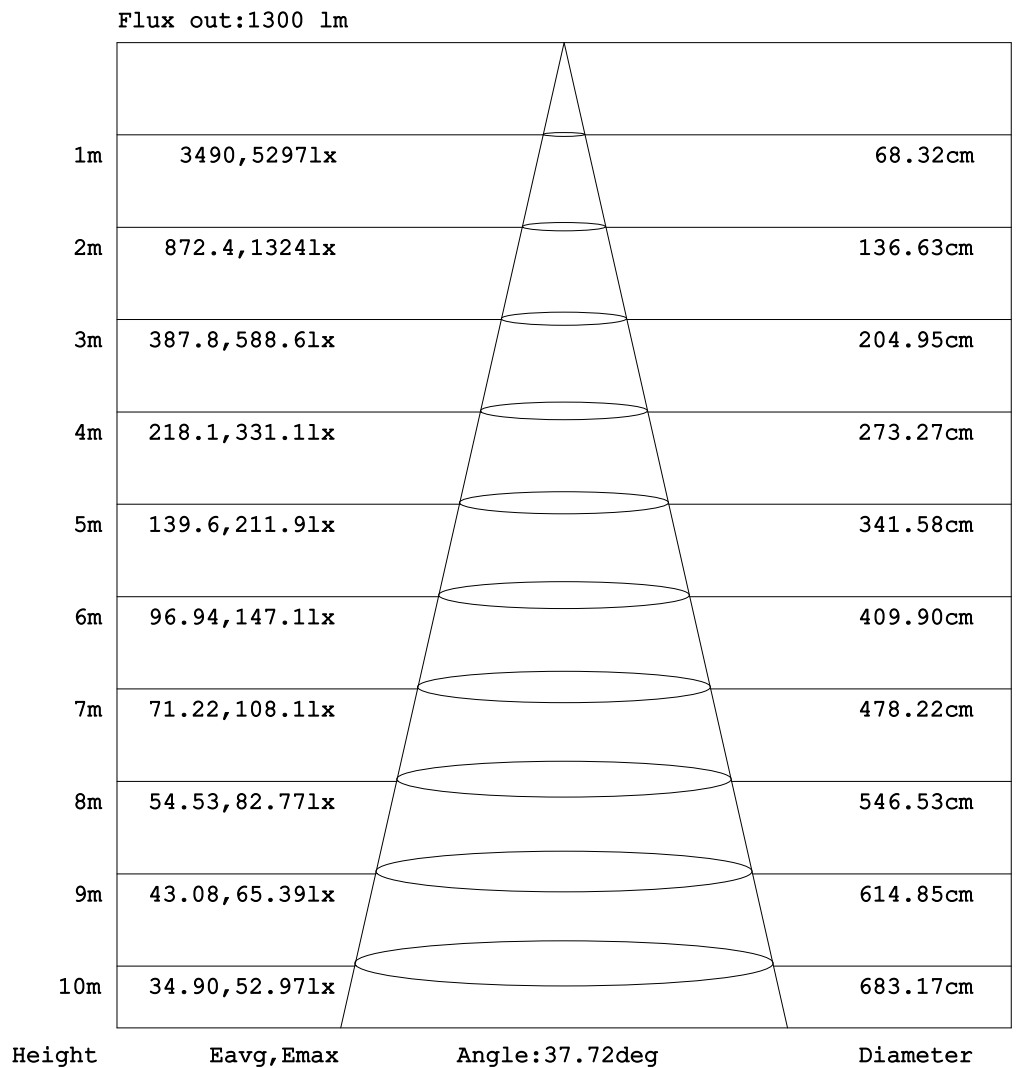


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators:
 Test Date: 2026-04-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 4.234m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:217.72V I:0.1327A P:26.565W PF:0.9194 Freq:49.99Hz Lamp Flux:2359.49x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

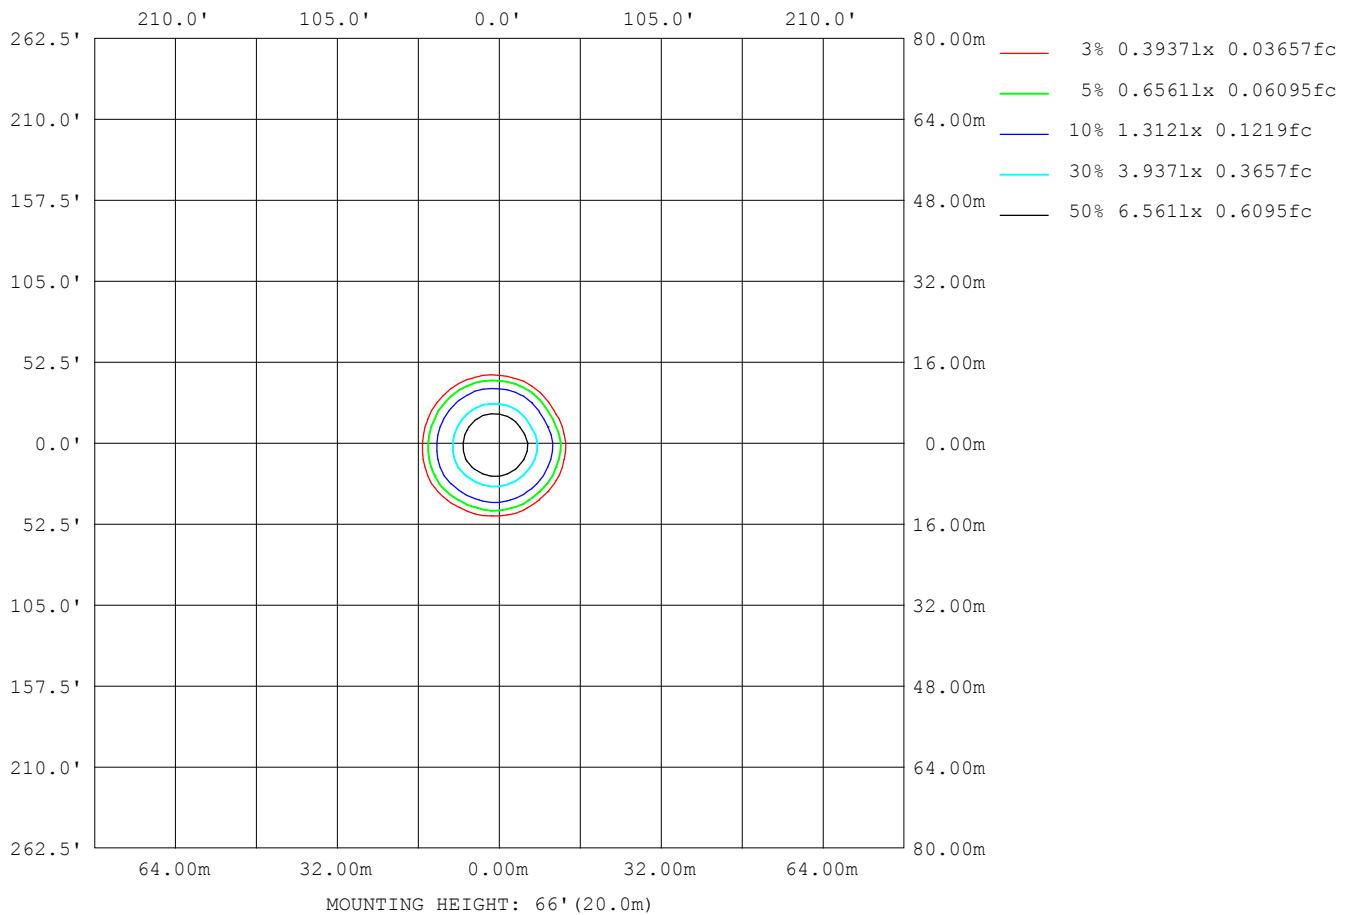

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:217.72V I:0.1327A P:26.565W PF:0.9194 Freq:49.99Hz Lamp Flux:2359.49x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	64
L_0~180 (75) av	48
L_0~180 (85) av	30
L_90~270 (65) av	65
L_90~270 (75) av	48
L_90~270 (85) av	36
L_45 (65) av	85
L_45 (75) av	52
L_45 (85) av	36

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:2026-04-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:4.234m [K=1.0000]
 Remarks:

Planar Illuminance Curve

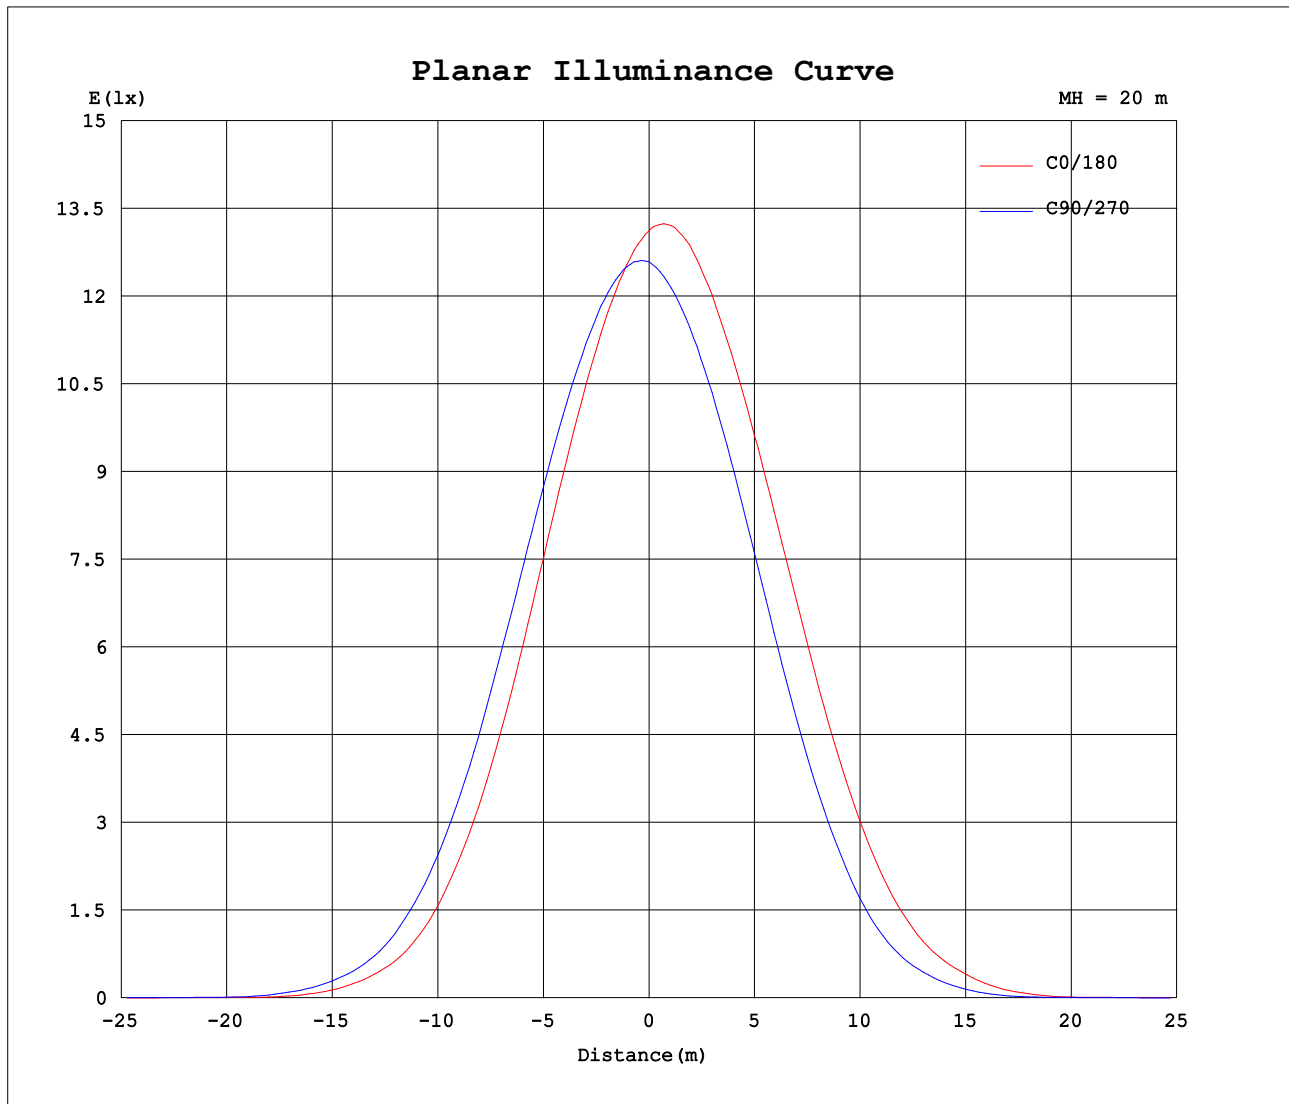

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators:
 Test Date: 2026-04-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 4.234m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:217.72V I:0.1327A P:26.565W PF:0.9194 Freq:49.99Hz Lamp Flux:2359.49x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	5103	5103	5103	5103	5103	5103	5103	5103	5103	5103	5103	5103						
5	4688	4767	4858	4993	5095	5214	5099	5005	4912	4767	4678	4586						
10	3968	4102	4261	4505	4660	4858	4661	4528	4370	4106	3944	3780						
15	3010	3183	3386	3708	3923	4187	3939	3770	3539	3185	2980	2766						
20	1972	2132	2343	2701	2966	3277	2991	2789	2520	2148	1955	1744						
25	1089	1210	1375	1672	1921	2239	1946	1756	1522	1214	1088	922						
30	474	545	650	850	1000	1256	1039	896	735	536	471	380						
35	174	211	254	342	423	559	448	376	295	196	178	145						
40	36.7	80.6	101	106	159	213	132	144	108	40.4	71.2	50.7						
45	12.5	17.0	37.8	17.6	49.0	81.0	19.2	50.5	25.4	13.1	19.3	13.3						
50	6.86	10.1	12.2	11.0	13.5	19.1	11.6	13.4	11.2	6.98	10.04	8.09						
55	4.79	5.64	7.01	5.44	7.64	10.2	5.43	7.70	5.86	4.66	5.62	5.17						
60	4.52	4.62	4.69	4.57	4.45	5.06	4.14	4.35	4.36	4.37	4.70	4.69						
65	2.52	3.57	3.89	3.09	4.02	3.97	2.88	3.63	3.64	2.42	2.78	2.49						
70	1.82	2.05	2.07	2.01	2.30	2.40	1.91	2.00	1.97	1.72	1.74	1.74						
75	1.19	1.35	1.36	1.37	1.58	1.59	1.30	1.32	1.30	1.12	1.09	1.09						
80	0.66	0.75	0.78	0.82	0.97	0.99	0.80	0.78	0.75	0.63	0.58	0.55						
85	0.20	0.28	0.32	0.39	0.47	0.46	0.33	0.36	0.31	0.23	0.18	0.14						
90	0.10	0.11	0.10	0.10	0.11	0.12	0.11	0.11	0.11	0.11	0.11	0.11						
95	0.15	0.15	0.14	0.12	0.12	0.12	0.12	0.12	0.13	0.13	0.15	0.15						
100	0.32	0.29	0.26	0.20	0.18	0.17	0.15	0.17	0.19	0.21	0.24	0.28						
105	0.72	0.64	0.56	0.43	0.37	0.32	0.27	0.30	0.35	0.43	0.50	0.59						
110	1.52	1.35	1.19	0.95	0.82	0.69	0.55	0.62	0.73	0.95	1.08	1.27						
115	2.89	2.53	2.28	1.88	1.70	1.48	1.17	1.39	1.63	1.98	2.11	2.45						
120	4.66	4.25	3.93	3.33	3.15	2.62	2.30	2.53	2.82	3.43	3.69	4.22						
125	6.81	6.34	5.98	5.26	5.00	4.28	3.84	4.02	4.47	5.19	5.58	6.09						
130	9.03	8.71	8.38	7.62	7.03	6.40	5.72	6.08	6.60	7.45	8.02	8.49						
135	11.5	11.3	10.7	10.2	9.42	9.11	8.04	8.67	9.02	9.89	10.4	11.2						
140	14.0	13.7	13.1	12.8	11.9	11.4	10.7	10.8	11.4	12.2	12.7	13.3						
145	15.5	15.1	15.0	14.5	14.0	13.5	12.6	12.9	13.4	14.1	14.4	14.8						
150	15.9	16.1	16.1	16.0	15.5	15.1	14.2	14.3	15.0	15.5	15.4	15.6						
155	15.7	16.0	16.6	16.6	16.3	15.8	15.0	15.1	15.5	15.5	15.5	15.4						
160	14.6	15.1	15.7	16.3	15.9	16.1	14.8	14.8	14.8	14.8	14.7	14.4						
165	13.0	13.7	14.2	15.0	14.7	15.6	13.7	13.7	13.7	13.7	13.3	12.6						
170	11.6	12.2	12.6	13.1	13.1	13.3	12.4	12.3	12.1	12.0	11.7	11.3						
175	10.8	11.3	11.9	11.9	12.0	12.1	11.3	11.3	11.3	11.1	11.2	10.8						
180	10.9	11.2	11.3	11.3	11.3	11.4	10.9	11.1	11.3	11.2	11.4	11.4						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: