


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:217.64V I:0.1400A P:28.264W PF:0.9274 Freq:49.99Hz Lamp Flux:1893.84x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 67.01 lm/W			
MODEL	GK75-S01QS2_T2	I _{max} (cd)	6864	S/MH(C0/180)	0.47
NOMINAL POWER(W)	2x15	LOR(%)	100.0	S/MH(C90/270)	0.43
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1893.8	η UP,DN(C0-180)	0.8,56.1
NOMINAL FLUX(lm)	1893.84	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.7,42.3
LAMPS INSIDE	1	η up(%)	1.5	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	220	η down(%)	98.5	CIBSE SHR MAX	0.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

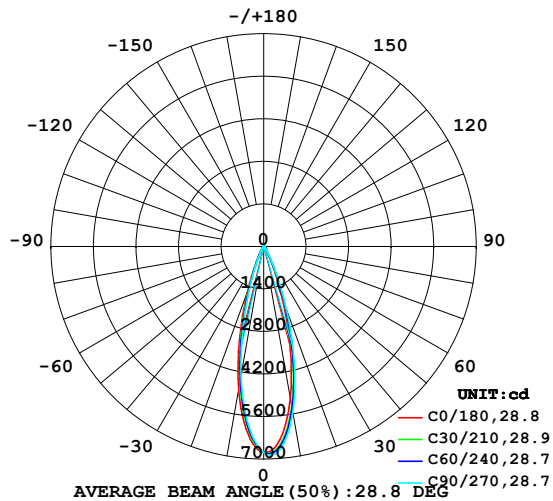

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

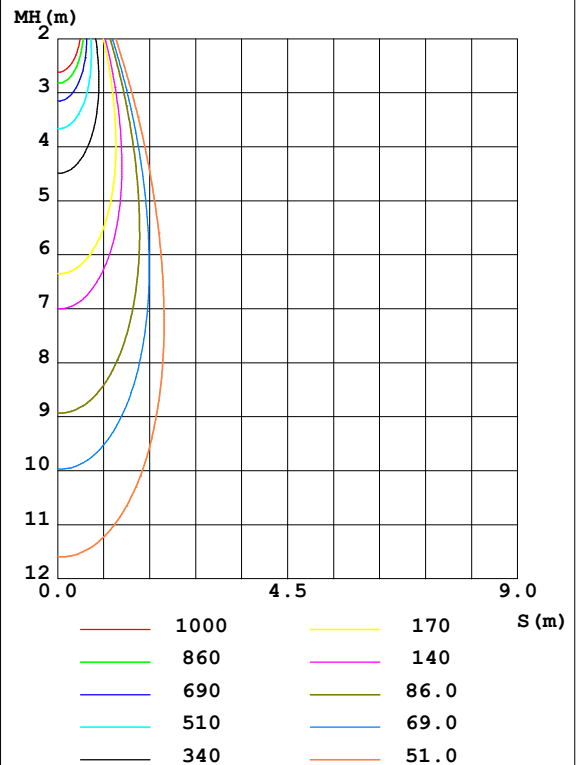

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	5069	5361	5531	5398	4775	4492	4315	4424	0- 10	553.9	553.9	29.2,29.2
20	1743	2032	2184	2049	1535	1317	1173	1230	10- 20	864.5	1418	74.9,74.9
30	285.9	348.7	385.9	358.2	263.4	222.9	188.7	191.9	20- 30	347.9	1766	93.3,93.3
40	35.77	63.34	55.56	70.72	34.56	45.20	19.40	38.61	30- 40	82.10	1848	97.6,97.6
50	2.715	4.005	3.292	4.305	2.838	3.505	2.451	3.106	40- 50	12.72	1861	98.3,98.3
60	1.664	1.672	1.629	1.767	1.784	1.811	1.723	1.679	50- 60	2.052	1863	98.4,98.4
70	0.7777	0.8711	0.8206	0.9288	0.8444	0.8824	0.7856	0.7774	60- 70	1.276	1864	98.4,98.4
80	0.3229	0.3593	0.3640	0.4075	0.3623	0.3522	0.3172	0.2930	70- 80	0.6145	1865	98.5,98.5
90	0.0668	0.0695	0.0667	0.0674	0.0793	0.0810	0.0796	0.0782	80- 90	0.1916	1865	98.5,98.5
100	0.1158	0.1123	0.1040	0.1011	0.1109	0.1194	0.1179	0.1265	90-100	0.0934	1865	98.5,98.5
110	0.4753	0.4121	0.3622	0.3642	0.3596	0.4014	0.4370	0.4177	100-110	0.2284	1866	98.5,98.5
120	2.233	1.941	1.758	1.799	1.748	1.887	2.042	1.924	110-120	0.9695	1867	98.6,98.6
130	6.148	5.766	5.524	5.562	5.372	5.761	6.008	5.749	120-130	3.221	1870	98.7,98.7
140	11.17	10.75	10.53	10.44	10.45	10.63	10.90	10.64	130-140	6.326	1876	99.1,99.1
150	13.85	13.77	13.73	13.41	13.26	13.23	13.50	13.29	140-150	7.716	1884	99.5,99.5
160	12.83	13.26	13.59	12.87	11.97	11.80	12.01	12.05	150-160	6.183	1890	99.8,99.8
170	9.197	9.697	9.788	9.236	8.272	7.872	7.846	8.019	160-170	3.113	1893	100,100
180	6.616	6.768	6.544	6.558	6.654	6.765	6.517	6.555	170-180	0.7324	1894	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:217.64V I:0.1400A P:28.264W PF:0.9274 Freq:49.99Hz Lamp Flux:1893.84x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

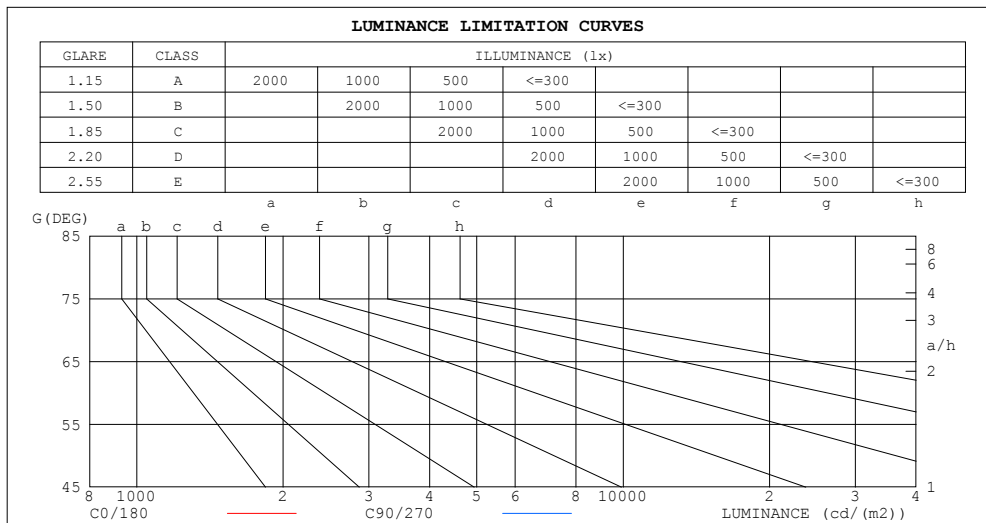

LUMINANCE cd/ (m2)		
G (DEG)	C0/180	C90/270
85	15	21
80	19	21
75	21	22
70	23	24
65	25	27
60	34	32
55	32	35
50	43	51
45	71	90


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:217.64V I:0.1400A P:28.264W PF:0.9274 Freq:49.99Hz Lamp Flux:1893.84x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.98
1.0	1.12	1.10	1.08	1.10	1.08	1.07	1.06	1.04	1.03	1.02	1.01	.00	.98	.97	.97	.95
2.0	1.07	1.04	1.01	1.05	1.02	.00	1.02	.99	.97	.98	.97	.95	.96	.94	.93	.91
3.0	1.02	.98	.95	1.00	.97	.94	.98	.95	.93	.95	.93	.91	.93	.91	.89	.88
4.0	.97	.93	.90	.96	.93	.90	.94	.91	.88	.92	.89	.87	.90	.88	.86	.85
5.0	.94	.89	.86	.93	.89	.86	.91	.87	.85	.89	.86	.84	.88	.85	.83	.82
6.0	.90	.86	.83	.89	.85	.82	.88	.84	.82	.86	.83	.81	.85	.82	.80	.79
7.0	.87	.82	.79	.86	.82	.79	.85	.81	.79	.84	.81	.78	.83	.80	.78	.77
8.0	.84	.79	.76	.83	.79	.76	.82	.79	.76	.81	.78	.76	.80	.77	.75	.74
9.0	.81	.77	.74	.81	.77	.74	.80	.76	.73	.79	.76	.73	.78	.75	.73	.72
10.0	.79	.74	.72	.78	.74	.71	.77	.74	.71	.77	.73	.71	.76	.73	.71	.70

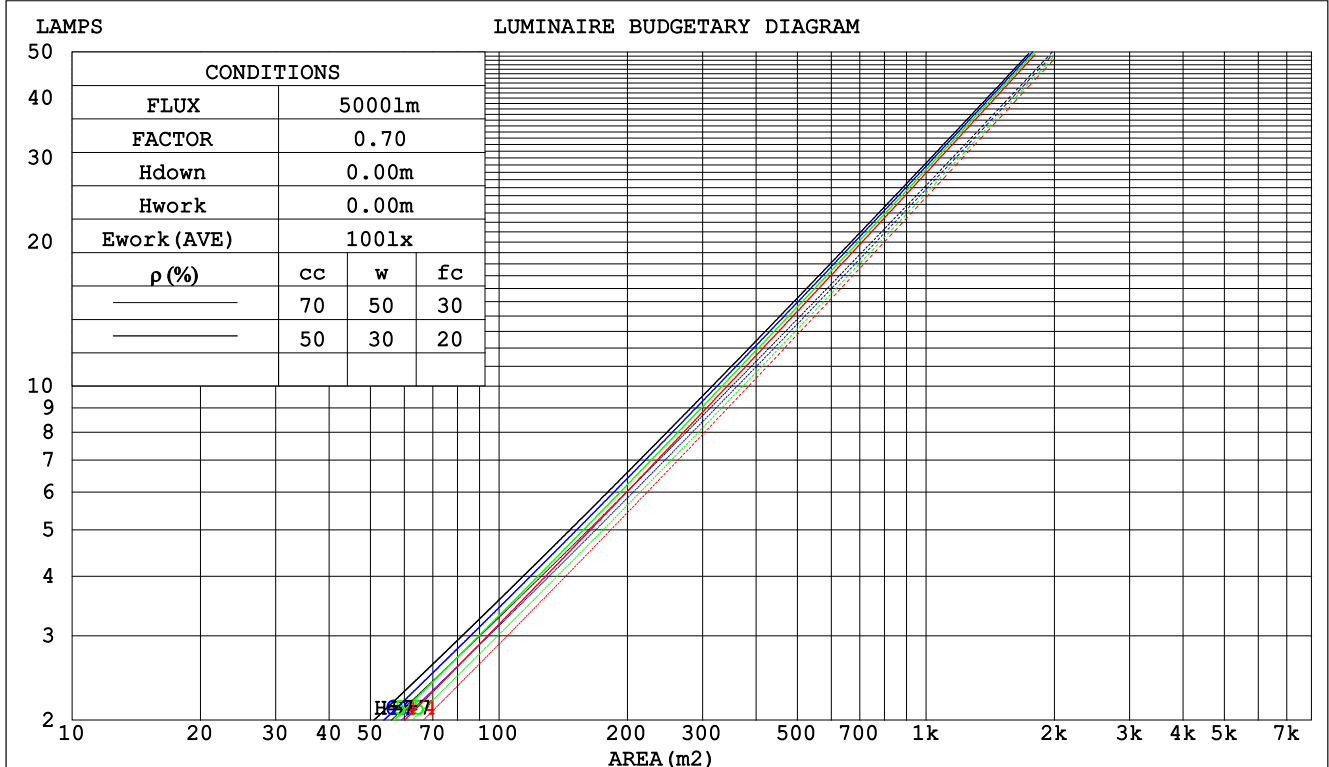

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:2026-04-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:4.234m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:217.64V I:0.1400A P:28.264W PF:0.9274 Freq:49.99Hz Lamp Flux:1893.84x1 lm					
NAME:		TYPE:COB		WEIGHT:	
SPEC.:3000K		DIM.: 6mm		SERIAL No.:	
MFR.: Hangzhou XRZLux Co.,Ltd		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.143	.081	.026	.135	.077	.025	.122	.070	.022	.110	.063	.020	.099	.057	.018	
2.0	.133	.073	.022	.127	.070	.021	.116	.064	.020	.105	.059	.019	.096	.054	.017	
3.0	.124	.066	.020	.119	.064	.019	.110	.059	.018	.101	.055	.017	.093	.051	.016	
4.0	.116	.061	.018	.112	.059	.017	.104	.055	.017	.097	.052	.016	.090	.049	.015	
5.0	.110	.056	.016	.106	.055	.016	.099	.052	.015	.093	.049	.015	.087	.047	.014	
6.0	.104	.052	.015	.101	.051	.015	.095	.049	.014	.090	.047	.014	.084	.044	.013	
7.0	.099	.049	.014	.097	.048	.014	.091	.046	.013	.086	.044	.013	.082	.042	.012	
8.0	.095	.046	.013	.092	.045	.013	.088	.044	.013	.083	.042	.012	.079	.041	.012	
9.0	.091	.044	.012	.089	.043	.012	.084	.042	.012	.080	.040	.012	.077	.039	.011	
10.0	.087	.042	.012	.085	.041	.011	.081	.040	.011	.078	.039	.011	.075	.037	.011	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.202	.202	.202	.173	.173	.173	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.180	.169	.159	.154	.145	.137	.106	.100	.095	.061	.058	.055	.019	.019	.018	
2.0	.163	.144	.129	.139	.124	.111	.095	.086	.078	.055	.050	.046	.018	.016	.015	
3.0	.148	.125	.107	.127	.108	.093	.087	.075	.065	.050	.044	.038	.016	.014	.013	
4.0	.136	.110	.090	.117	.095	.078	.080	.066	.055	.046	.039	.033	.015	.013	.011	
5.0	.126	.098	.077	.108	.084	.067	.074	.059	.047	.043	.035	.028	.014	.011	.009	
6.0	.117	.088	.067	.101	.076	.058	.069	.053	.041	.040	.031	.024	.013	.010	.008	
7.0	.110	.080	.059	.094	.069	.051	.065	.048	.036	.038	.029	.022	.012	.009	.007	
8.0	.103	.073	.052	.089	.063	.046	.062	.044	.032	.036	.026	.019	.012	.009	.006	
9.0	.098	.067	.047	.084	.059	.041	.058	.041	.029	.034	.024	.017	.011	.008	.006	
10.0	.093	.063	.043	.080	.055	.037	.056	.038	.026	.032	.023	.016	.011	.007	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:217.64V I:0.1400A P:28.264W PF:0.9274 Freq:49.99Hz Lamp Flux:1893.84x1 lm										
NAME:					TYPE:COB			WEIGHT:		
SPEC.:3000K					DIM.: 6mm			SERIAL No.:		
MFR.: Hangzhou XRZLux Co.,Ltd					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	-2.4	-1.7	-2.2	-1.5	-1.4	-1.2	-0.6	-1.0	-0.4	-0.2
3H	-2.5	-1.9	-2.3	-1.7	-1.5	-1.4	-0.8	-1.1	-0.5	-0.3
4H	-2.6	-2.0	-2.3	-1.8	-1.5	-1.5	-0.9	-1.2	-0.6	-0.4
6H	-2.7	-2.1	-2.4	-1.9	-1.6	-1.6	-1.0	-1.2	-0.7	-0.5
8H	-2.7	-2.2	-2.4	-1.9	-1.6	-1.6	-1.0	-1.3	-0.8	-0.5
12H	-2.8	-2.3	-2.4	-2.0	-1.7	-1.6	-1.1	-1.3	-0.8	-0.5
4H 2H	-2.6	-2.0	-2.3	-1.8	-1.5	-1.5	-0.9	-1.2	-0.6	-0.4
3H	-2.8	-2.3	-2.4	-2.0	-1.7	-1.6	-1.1	-1.3	-0.8	-0.5
4H	-2.9	-2.4	-2.5	-2.1	-1.7	-1.7	-1.3	-1.4	-0.9	-0.6
6H	-3.0	-2.5	-2.6	-2.2	-1.8	-1.8	-1.4	-1.4	-1.1	-0.7
8H	-3.0	-2.6	-2.6	-2.2	-1.9	-1.9	-1.5	-1.5	-1.1	-0.7
12H	-3.1	-2.7	-2.6	-2.3	-1.9	-1.9	-1.6	-1.5	-1.2	-0.8
8H 4H	-3.0	-2.6	-2.6	-2.3	-1.9	-1.9	-1.5	-1.5	-1.1	-0.7
6H	-3.1	-2.8	-2.7	-2.4	-1.9	-2.0	-1.7	-1.5	-1.3	-0.8
8H	-3.2	-2.9	-2.7	-2.5	-2.0	-2.1	-1.8	-1.6	-1.3	-0.9
12H	-3.2	-3.0	-2.8	-2.5	-2.0	-2.1	-1.9	-1.6	-1.4	-0.9
12H 4H	-3.1	-2.7	-2.7	-2.3	-1.9	-1.9	-1.6	-1.5	-1.2	-0.8
6H	-3.2	-2.9	-2.7	-2.5	-2.0	-2.1	-1.8	-1.6	-1.3	-0.9
8H	-3.2	-3.0	-2.8	-2.5	-2.0	-2.1	-1.9	-1.6	-1.4	-0.9
Variations with the observer position at spacings:										
S = 1.0H	+ 3.1 / -11.2					+ 3.8 / -12.5				
1.5H	+ 5.8 / -10.6					+ 6.5 / -11.7				
2.0H	+ 3.5 / - 1.3					+ 5.5 / - 2.3				

CIE Pub.117, 1894 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 2.2)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:217.64V I:0.1400A P:28.264W PF:0.9274 Freq:49.99Hz Lamp Flux:1893.84x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	90	84	81	90	84	81	89	84	81	77
0.80	97	92	88	96	91	88	95	91	88	84
1.00	101	96	93	100	95	92	98	95	92	88
1.25	104	100	97	103	99	96	101	98	95	91
1.50	107	103	100	106	102	99	103	100	98	93
2.00	109	105	102	108	104	102	105	102	100	95
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	96
4.00	114	111	109	112	110	108	108	106	105	98
5.00	115	113	111	113	111	110	109	108	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:217.64V I:0.1400A P:28.264W PF:0.9274 Freq:49.99Hz Lamp Flux:1893.84x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

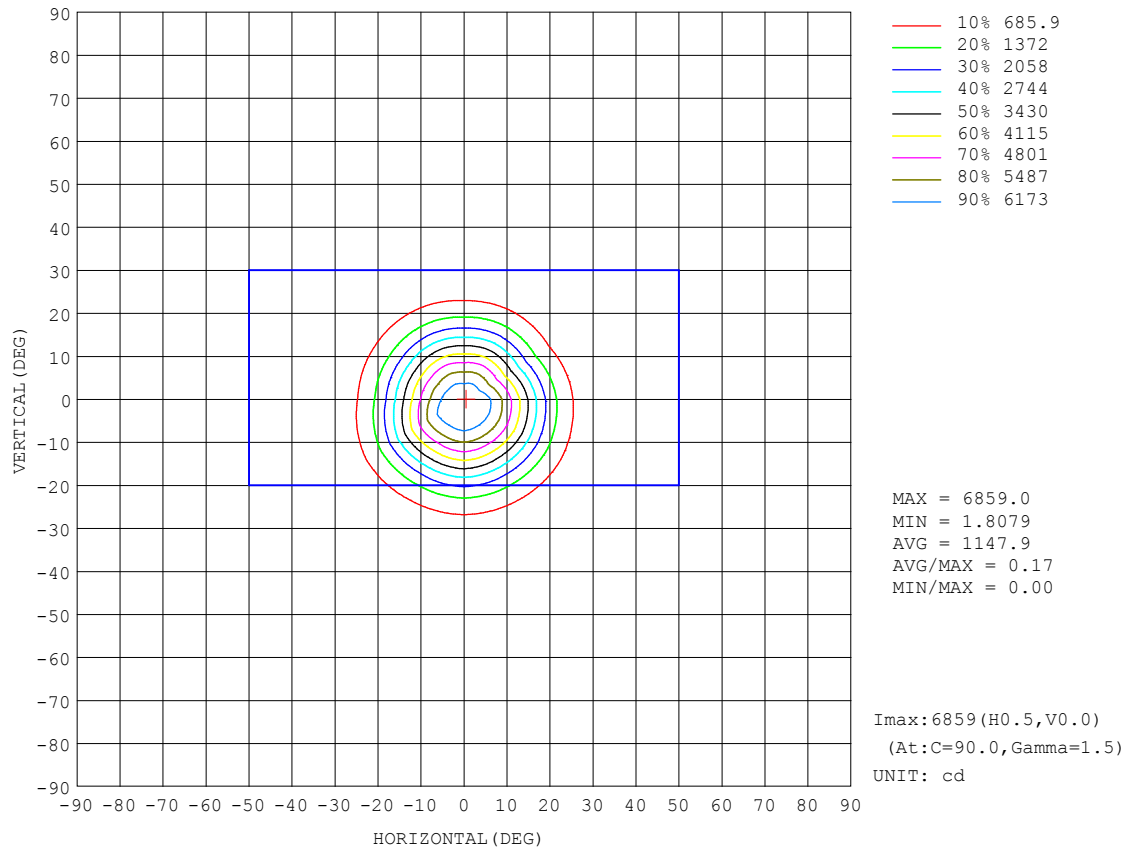


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

AAI Figure

Test:U:217.64V I:0.1400A P:28.264W PF:0.9274 Freq:49.99Hz Lamp Flux:1893.84x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

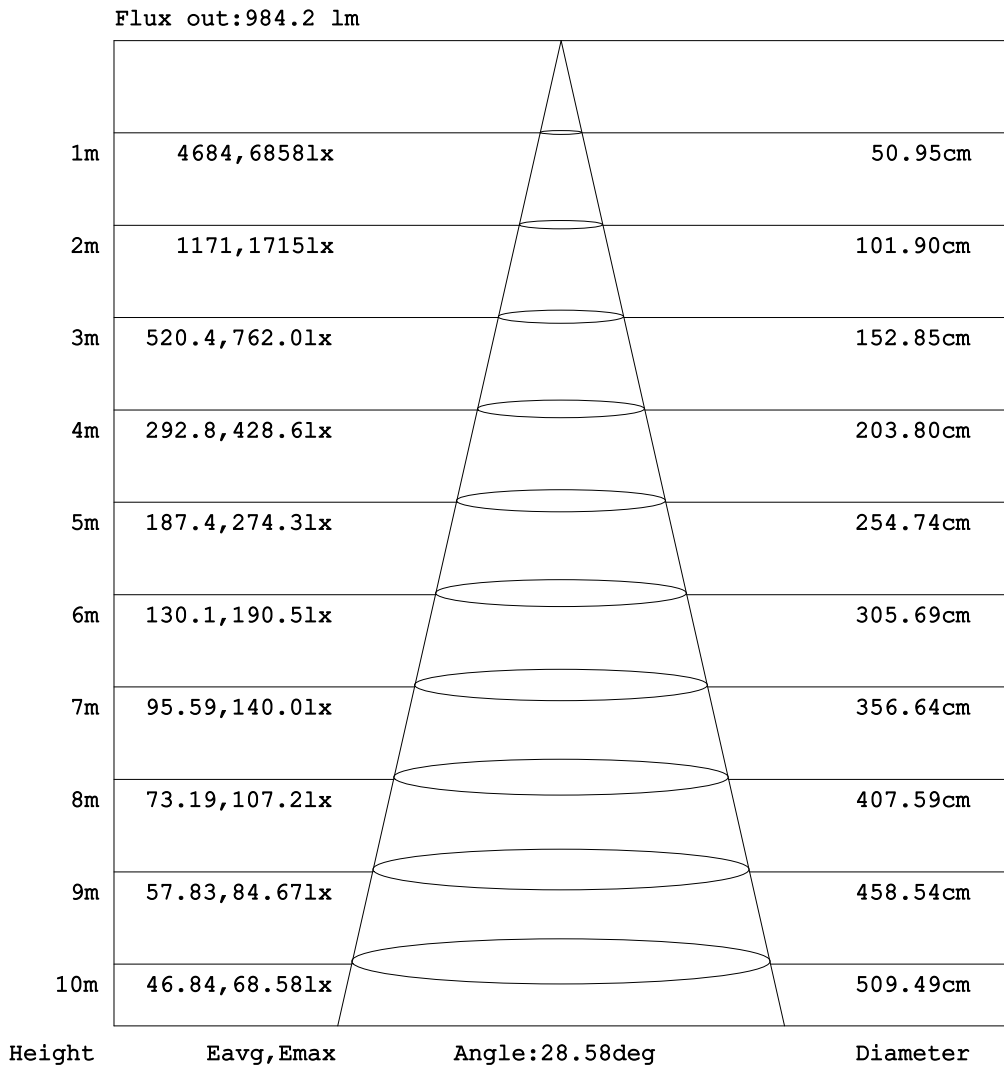


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:217.64V I:0.1400A P:28.264W PF:0.9274 Freq:49.99Hz Lamp Flux:1893.84x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

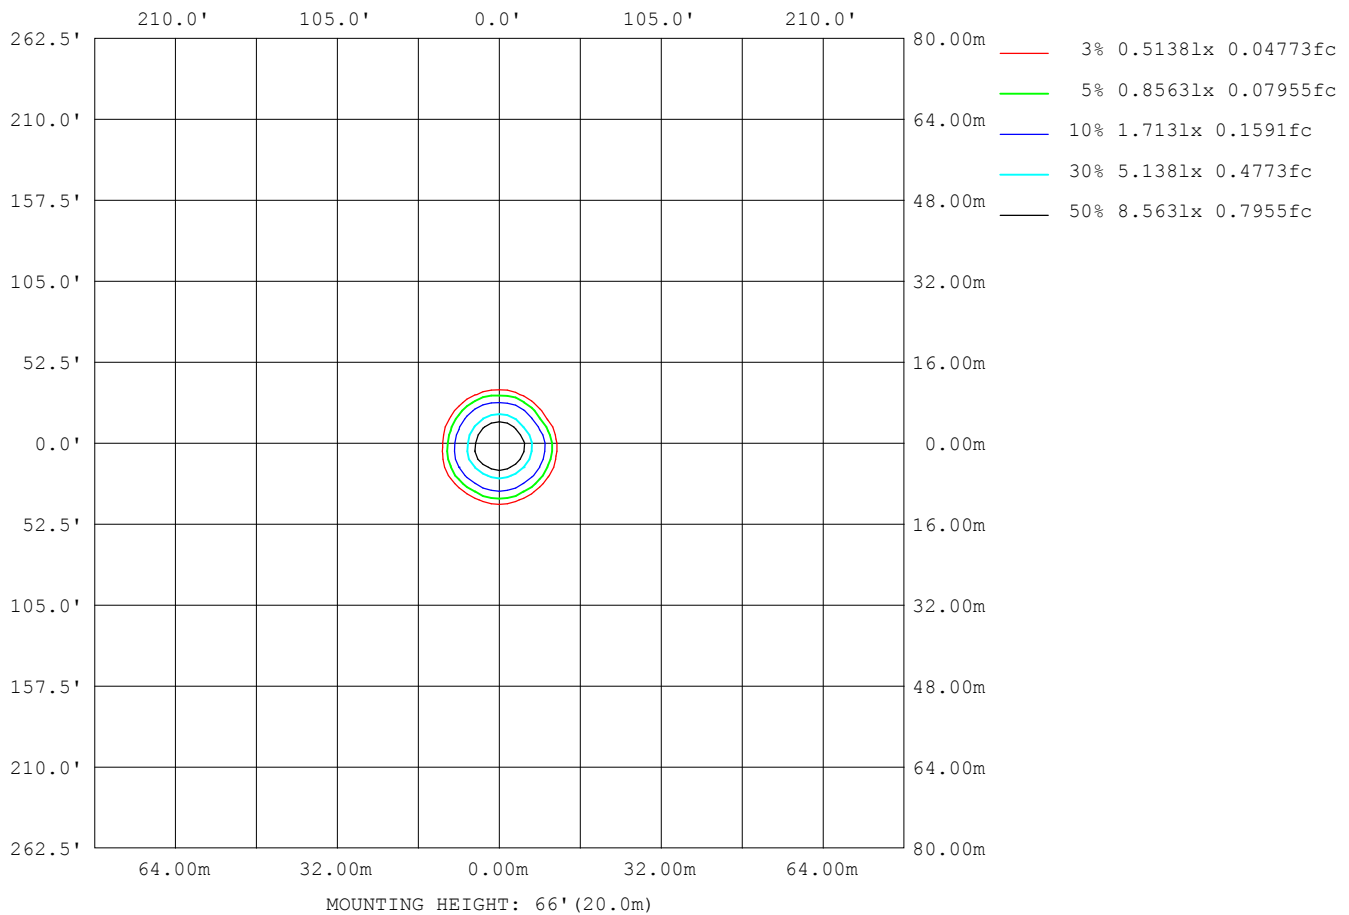

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:217.64V I:0.1400A P:28.264W PF:0.9274 Freq:49.99Hz Lamp Flux:1893.84x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	26
L_0~180 (75) av	22
L_0~180 (85) av	16
L_90~270 (65) av	26
L_90~270 (75) av	21
L_90~270 (85) av	18
L_45 (65) av	34
L_45 (75) av	23
L_45 (85) av	19

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

Planar Illuminance Curve

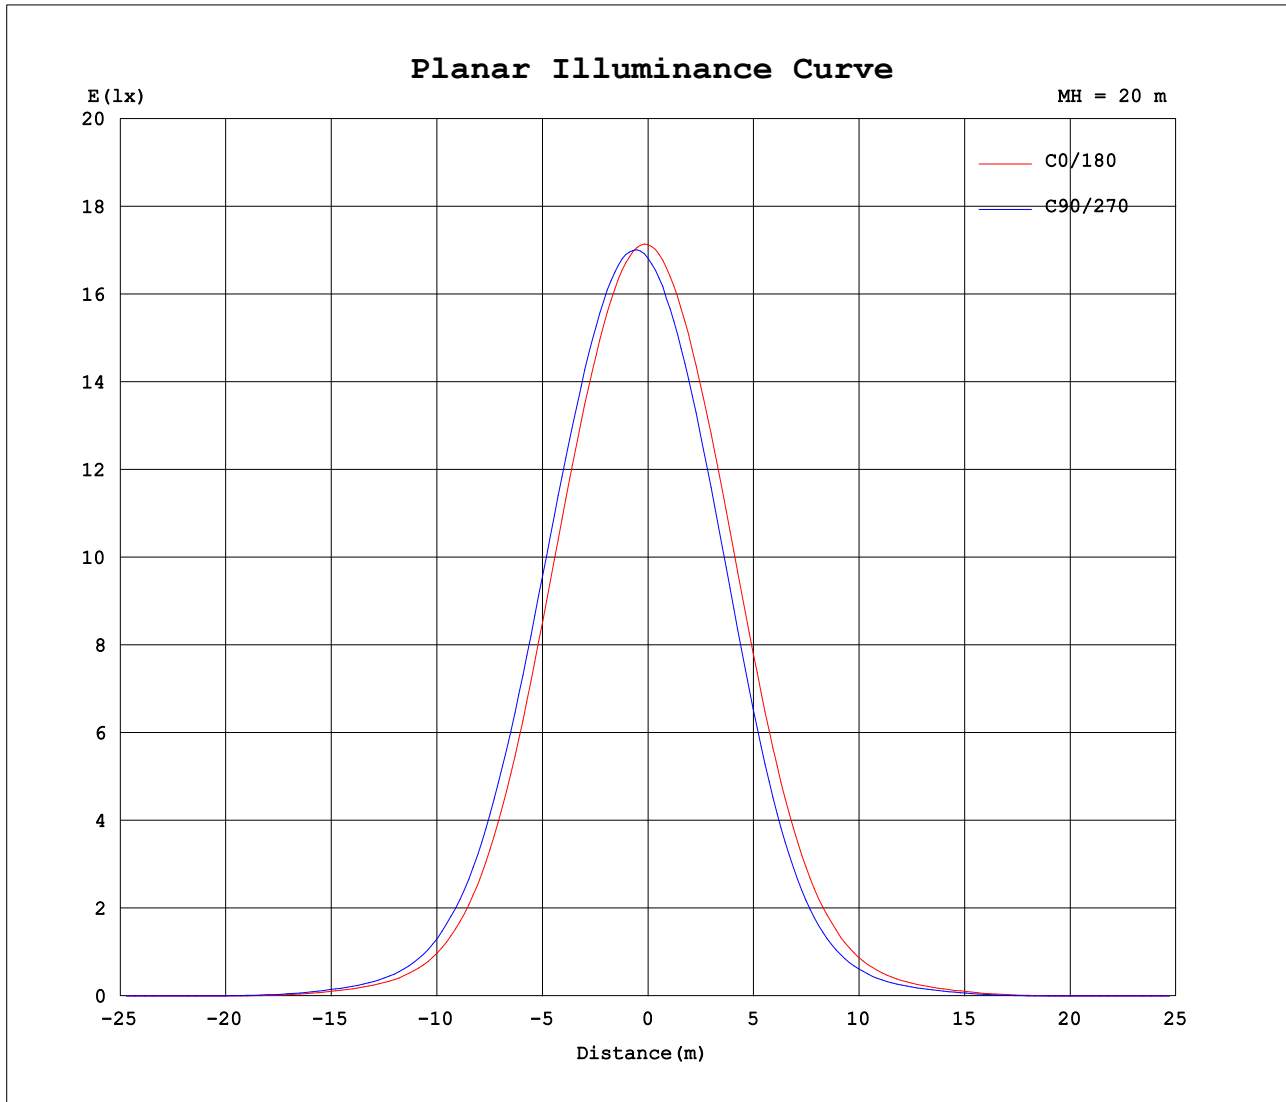

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators:
 Test Date: 2026-04-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 4.234m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:217.64V I:0.1400A P:28.264W PF:0.9274 Freq:49.99Hz Lamp Flux:1893.84x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	6778	6778	6778	6778	6778	6778	6778	6778	6778	6778	6778	6778						
5	6351	6518	6555	6649	6541	6571	6156	6020	5965	5882	5953	5935						
10	5069	5331	5392	5531	5381	5415	4775	4533	4451	4315	4437	4412						
15	3349	3661	3718	3881	3711	3744	3040	2784	2681	2546	2661	2637						
20	1743	2015	2049	2184	2043	2056	1535	1363	1271	1173	1235	1224						
25	729	899	903	986	892	912	646	568	515	462	478	476						
30	286	340	358	386	358	358	263	234	212	189	192	192						
35	121	141	148	164	153	154	117	106	97.0	84.3	89.0	87.9						
40	35.8	60.7	66.0	55.6	70.3	71.2	34.6	48.3	42.1	19.4	39.6	37.6						
45	4.98	15.2	24.0	6.42	22.0	27.5	4.96	15.0	8.67	4.04	9.10	6.33						
50	2.72	3.68	4.33	3.29	4.05	4.56	2.84	3.65	3.36	2.45	3.20	3.01						
55	1.84	2.19	2.53	2.02	2.42	2.69	1.95	2.30	2.15	1.84	2.04	1.94						
60	1.66	1.65	1.70	1.63	1.72	1.81	1.78	1.84	1.78	1.72	1.70	1.66						
65	1.05	1.39	1.40	1.17	1.51	1.56	1.12	1.48	1.41	1.07	1.27	1.10						
70	0.78	0.87	0.87	0.82	0.91	0.94	0.84	0.88	0.88	0.79	0.80	0.76						
75	0.53	0.59	0.59	0.57	0.64	0.66	0.58	0.60	0.59	0.53	0.52	0.50						
80	0.32	0.36	0.36	0.36	0.40	0.41	0.36	0.36	0.35	0.32	0.30	0.29						
85	0.13	0.16	0.18	0.19	0.21	0.20	0.15	0.16	0.15	0.13	0.12	0.11						
90	0.07	0.07	0.07	0.07	0.07	0.07	0.08	0.08	0.08	0.08	0.08	0.08						
95	0.08	0.08	0.08	0.07	0.07	0.07	0.09	0.09	0.09	0.08	0.09	0.09						
100	0.12	0.12	0.11	0.10	0.10	0.10	0.11	0.12	0.12	0.12	0.13	0.12						
105	0.22	0.21	0.19	0.18	0.17	0.18	0.18	0.19	0.20	0.21	0.21	0.21						
110	0.48	0.43	0.39	0.36	0.36	0.36	0.36	0.39	0.41	0.44	0.42	0.42						
115	1.09	1.00	0.87	0.81	0.83	0.82	0.80	0.89	0.90	0.98	0.92	0.91						
120	2.23	2.02	1.86	1.76	1.82	1.78	1.75	1.86	1.91	2.04	1.93	1.92						
125	3.98	3.62	3.48	3.34	3.43	3.36	3.28	3.48	3.58	3.76	3.53	3.55						
130	6.15	5.85	5.68	5.52	5.60	5.52	5.37	5.71	5.82	6.01	5.74	5.75						
135	8.68	8.48	8.19	8.05	8.09	8.09	7.87	8.28	8.34	8.54	8.24	8.35						
140	11.2	10.9	10.6	10.5	10.5	10.4	10.4	10.6	10.7	10.9	10.6	10.7						
145	13.0	12.7	12.6	12.5	12.3	12.3	12.2	12.3	12.5	12.7	12.4	12.4						
150	13.8	13.8	13.7	13.7	13.5	13.3	13.3	13.2	13.3	13.5	13.3	13.3						
155	13.9	13.9	14.1	14.1	13.7	13.4	13.2	12.9	13.1	13.3	13.2	13.1						
160	12.8	13.2	13.4	13.6	13.1	12.7	12.0	11.7	11.8	12.0	12.1	12.0						
165	11.1	11.7	11.8	12.0	11.5	11.1	10.2	9.91	10.1	10.3	10.3	10.1						
170	9.20	9.69	9.70	9.79	9.29	9.18	8.27	7.98	7.76	7.85	8.03	8.01						
175	7.41	7.83	8.07	7.81	7.52	7.46	6.82	6.72	6.50	6.34	6.66	6.56						
180	6.62	6.81	6.72	6.54	6.54	6.58	6.65	6.78	6.75	6.52	6.55	6.56						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: