


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:110.07V I:0.5194A P:56.623W PF:0.9905 Freq:49.99Hz Lamp Flux:5395.28x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.: V10F90_3000K	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 95.28 lm/W			
MODEL	GK75-S01Q4	I _{max} (cd)	7371	S/MH (C0/180)	0.77
NOMINAL POWER(W)	4*15	LOR(%)	100.0	S/MH (C90/270)	0.78
RATED VOLTAGE(V)	110	TOTAL FLUX (lm)	5395.3	η UP,DN (C0-180)	0.8,51.4
NOMINAL FLUX(lm)	5395.28	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.7,47.2
LAMPS INSIDE	1	η up (%)	1.5	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	110	η down (%)	98.5	CIBSE SHR MAX	0.80

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

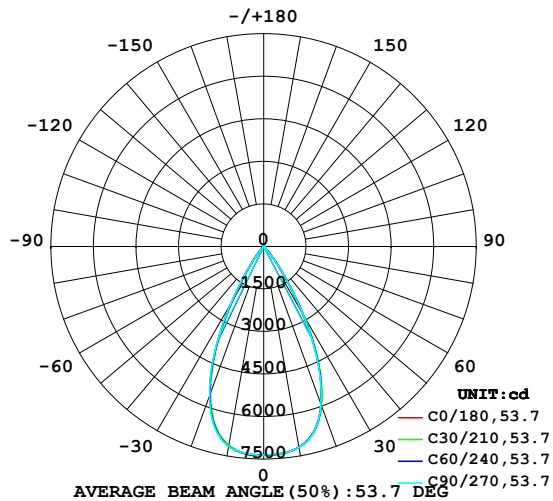

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

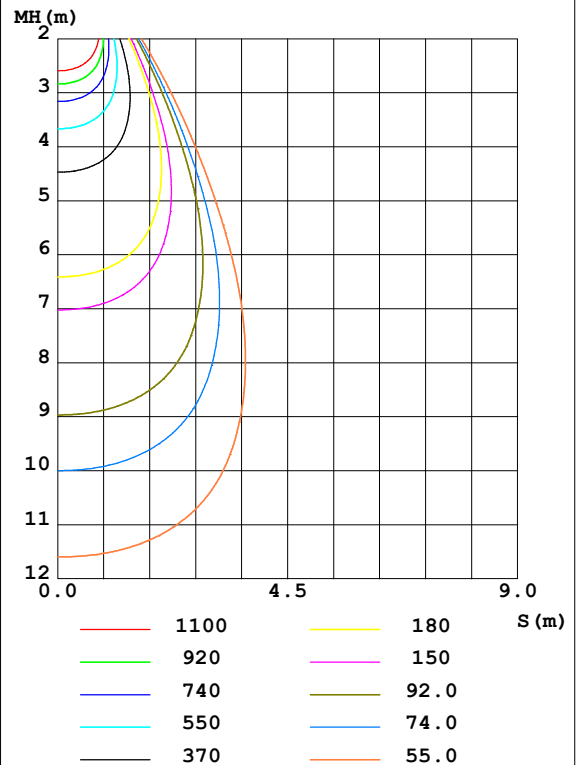

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2025-12-02

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: BXRE-30G10F4-A-83

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	7184	7185	7193	7196	7130	7133	7154	7156	0- 10	694.7	694.7	12.9,12.9
20	5926	5948	5914	5825	5553	5529	5598	5682	10- 20	1855	2550	47.3,47.3
30	2812	2878	2803	2641	2244	2233	2310	2428	20- 30	1920	4470	82.8,82.8
40	385.2	474.6	375.5	399.5	193.8	316.3	244.1	348.4	30- 40	743.0	5213	96.6,96.6
50	17.27	24.85	15.55	19.80	12.36	17.95	13.77	19.99	40- 50	82.31	5295	98.1,98.1
60	9.303	9.223	8.709	8.594	7.887	8.635	8.743	9.129	50- 60	10.53	5305	98.3,98.3
70	4.548	4.764	4.194	4.309	3.490	4.004	3.931	4.402	60- 70	6.451	5312	98.5,98.5
80	1.890	1.940	1.694	1.626	1.205	1.407	1.490	1.653	70- 80	3.038	5315	98.5,98.5
90	0.2164	0.2294	0.2266	0.2340	0.2405	0.2471	0.2381	0.2430	80- 90	0.7790	5316	98.5,98.5
100	0.5468	0.5907	0.6069	0.6462	0.5008	0.5401	0.4883	0.4784	90-100	0.3560	5316	98.5,98.5
110	2.958	2.971	3.122	3.201	2.621	2.657	2.567	2.407	100-110	1.496	5318	98.6,98.6
120	8.927	8.885	9.372	9.387	8.378	8.320	8.201	7.825	110-120	5.363	5323	98.7,98.7
130	17.51	17.48	17.84	17.89	16.68	16.39	16.27	15.99	120-130	11.30	5334	98.9,98.9
140	26.43	26.35	26.83	26.68	25.00	24.84	24.81	24.75	130-140	16.48	5351	99.2,99.2
150	32.49	32.64	32.64	32.57	30.66	30.41	30.46	30.84	140-150	18.15	5369	99.5,99.5
160	32.74	33.40	33.88	33.07	31.09	31.03	31.42	31.78	150-160	15.02	5384	99.8,99.8
170	29.21	29.61	29.43	28.82	28.11	27.65	27.99	28.55	160-170	8.730	5393	100,100
180	28.27	28.44	27.99	28.50	28.35	28.44	27.94	28.50	170-180	2.696	5395	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2025-12-02

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: BXRE-30G10F4-A-83

LUMINANCE LIMITATION CURVES

Test:U:110.07V I:0.5194A P:56.623W PF:0.9905 Freq:49.99Hz Lamp Flux:5395.28x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:BXRH-30V10F4-A-83	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

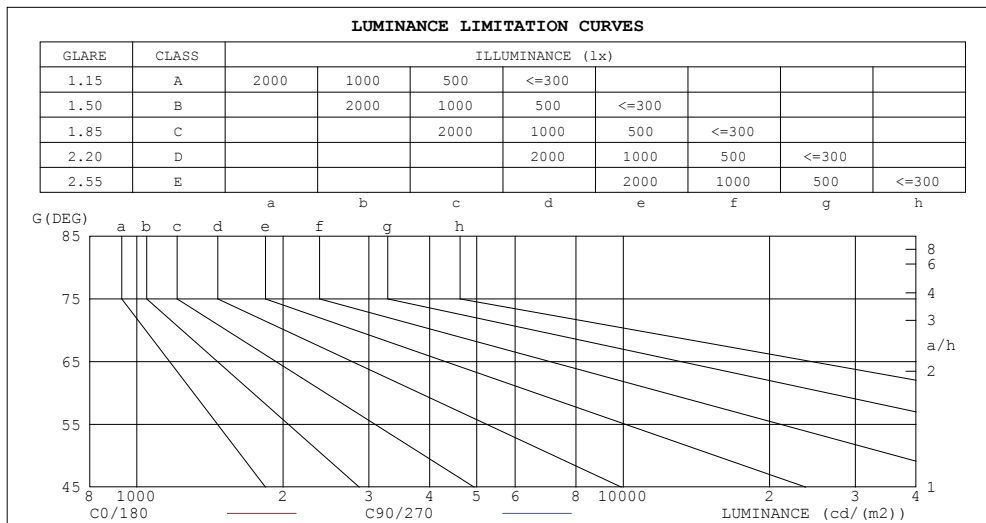

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	87	82
80	109	98
75	123	110
70	134	123
65	145	133
60	187	174
55	186	170
50	270	242
45	641	566


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2025-12-02

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: BXRE-30G10F4-A-83

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:110.07V I:0.5194A P:56.623W PF:0.9905 Freq:49.99Hz Lamp Flux:5395.28x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:BXRH-30V10F4-A-83	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.04	1.03	1.01	1.00	.99	.98	.97	.96	.95	.93
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.93	.92	.93	.91	.89	.88
3.0	.98	.93	.90	.96	.92	.89	.94	.90	.87	.91	.88	.86	.89	.86	.84	.83
4.0	.92	.87	.83	.91	.86	.83	.89	.85	.82	.87	.83	.81	.85	.82	.79	.78
5.0	.87	.82	.78	.86	.81	.77	.84	.80	.77	.82	.79	.76	.81	.78	.75	.74
6.0	.82	.77	.73	.82	.76	.73	.80	.75	.72	.78	.74	.72	.77	.74	.71	.70
7.0	.78	.73	.69	.77	.72	.68	.76	.71	.68	.75	.71	.68	.73	.70	.67	.66
8.0	.74	.69	.65	.73	.68	.65	.72	.68	.64	.71	.67	.64	.70	.66	.64	.62
9.0	.70	.65	.61	.70	.65	.61	.69	.64	.61	.68	.64	.61	.67	.63	.60	.59
10.0	.67	.62	.58	.67	.62	.58	.66	.61	.58	.65	.61	.58	.64	.60	.57	.56

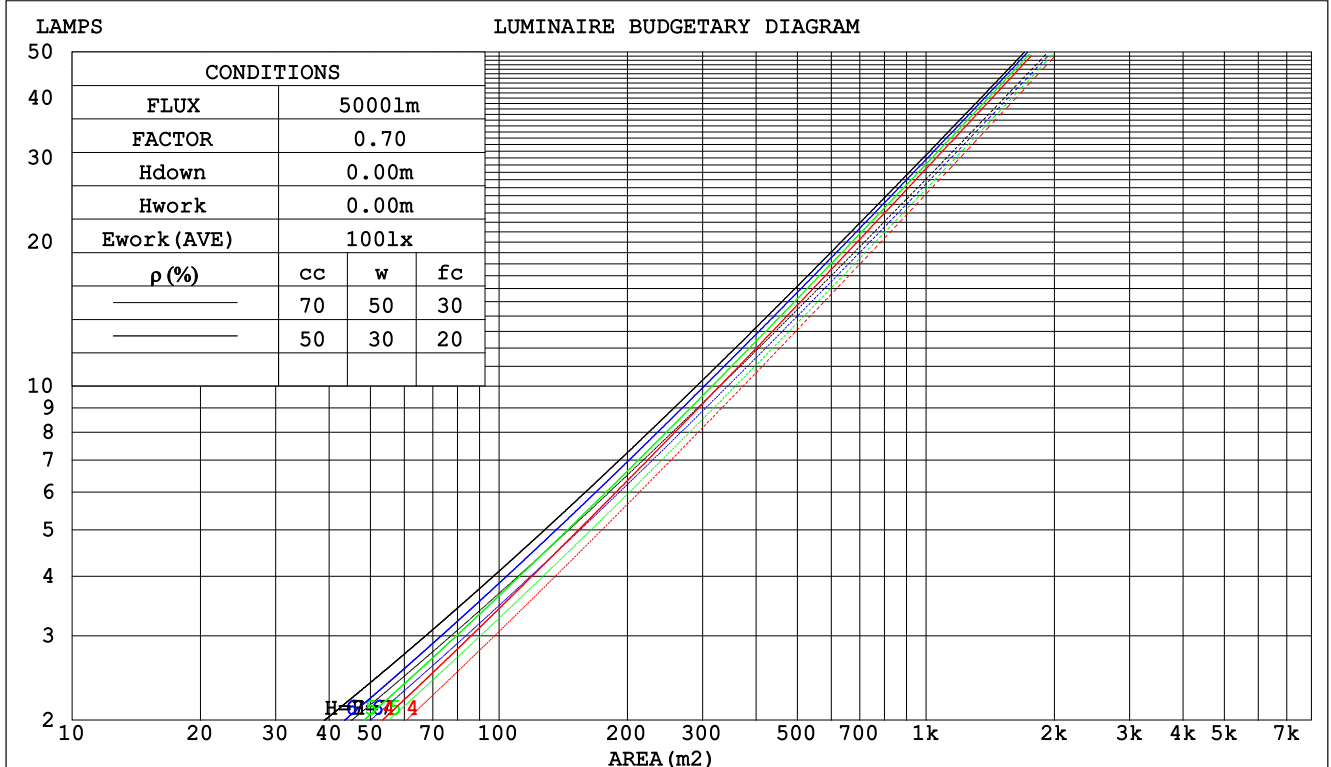

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2025-12-02

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: BXRE-30G10F4-A-83

WEC AND CCEC

Test:U:110.07V I:0.5194A P:56.623W PF:0.9905 Freq:49.99Hz Lamp Flux:5395.28x1 lm					
NAME:		TYPE:COB		WEIGHT:	
SPEC.:BXRH-30V10F4-A-83		DIM.: 9mm		SERIAL No.:	
MFR.: Hangzhou XRZLux Co.,Ltd		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.166	.094	.030	.159	.091	.029	.145	.083	.027	.133	.077	.025	.122	.071	.023		
2.0	.157	.086	.026	.151	.083	.026	.140	.078	.024	.130	.073	.023	.120	.068	.021		
3.0	.149	.079	.024	.144	.077	.023	.135	.073	.022	.126	.069	.021	.117	.065	.020		
4.0	.142	.074	.022	.137	.072	.021	.129	.069	.020	.121	.065	.020	.114	.062	.019		
5.0	.135	.069	.020	.131	.067	.020	.124	.065	.019	.117	.062	.018	.111	.059	.018		
6.0	.129	.065	.019	.126	.064	.018	.119	.061	.018	.113	.059	.017	.108	.057	.017		
7.0	.124	.061	.017	.121	.060	.017	.115	.058	.017	.110	.056	.016	.105	.054	.016		
8.0	.118	.058	.016	.116	.057	.016	.111	.055	.016	.106	.054	.015	.101	.052	.015		
9.0	.114	.055	.015	.111	.054	.015	.107	.053	.015	.103	.051	.015	.098	.050	.014		
10.0	.109	.052	.015	.107	.052	.014	.103	.051	.014	.099	.049	.014	.096	.048	.014		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.202	.202	.202	.172	.172	.172	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.182	.169	.157	.155	.145	.135	.106	.100	.093	.061	.058	.054	.020	.019	.018	
2.0	.166	.144	.126	.142	.124	.109	.097	.086	.076	.056	.050	.044	.018	.016	.014	
3.0	.153	.125	.103	.131	.108	.089	.090	.075	.063	.052	.044	.037	.017	.014	.012	
4.0	.142	.110	.086	.122	.095	.075	.084	.066	.052	.048	.039	.031	.016	.013	.010	
5.0	.133	.098	.073	.114	.085	.063	.079	.059	.045	.046	.035	.027	.015	.011	.009	
6.0	.125	.089	.063	.108	.077	.055	.074	.054	.039	.043	.032	.023	.014	.010	.008	
7.0	.119	.081	.055	.102	.070	.048	.071	.049	.034	.041	.029	.020	.013	.010	.007	
8.0	.113	.075	.049	.097	.065	.043	.067	.046	.030	.039	.027	.018	.013	.009	.006	
9.0	.108	.070	.044	.093	.061	.038	.064	.043	.027	.037	.025	.016	.012	.008	.005	
10.0	.103	.065	.040	.089	.057	.035	.062	.040	.025	.036	.024	.015	.012	.008	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2025-12-02

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: BXRE-30G10F4-A-83

UGR(Unified Glare Rating) Table

Test:U:110.07V I:0.5194A P:56.623W PF:0.9905 Freq:49.99Hz Lamp Flux:5395.28x1 lm										
NAME:					TYPE:COB			WEIGHT:		
SPEC.:BXRH-30V10F4-A-83					DIM.: 9mm			SERIAL No.:		
MFR.: Hangzhou XRZLux Co.,Ltd					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	6.2	7.0	6.4	7.2	7.4	6.0	6.9	6.3	7.1	7.3
3H	6.0	6.8	6.3	7.0	7.2	5.9	6.6	6.1	6.9	7.1
4H	5.9	6.7	6.2	6.9	7.1	5.8	6.5	6.1	6.8	7.0
6H	5.8	6.5	6.1	6.8	7.1	5.7	6.4	6.0	6.6	6.9
8H	5.8	6.5	6.1	6.7	7.0	5.6	6.3	6.0	6.6	6.9
12H	5.7	6.4	6.1	6.7	7.0	5.6	6.2	5.9	6.5	6.8
4H 2H	5.9	6.7	6.2	6.9	7.1	5.8	6.5	6.1	6.8	7.0
3H	5.7	6.4	6.1	6.7	7.0	5.6	6.2	5.9	6.5	6.8
4H	5.6	6.2	6.0	6.5	6.9	5.5	6.1	5.9	6.4	6.7
6H	5.5	6.1	5.9	6.4	6.8	5.4	5.9	5.8	6.3	6.6
8H	5.5	6.0	5.9	6.3	6.7	5.3	5.8	5.8	6.2	6.6
12H	5.4	5.9	5.9	6.3	6.7	5.3	5.7	5.7	6.1	6.5
8H 4H	5.5	6.0	5.9	6.3	6.7	5.3	5.8	5.8	6.2	6.6
6H	5.4	5.8	5.8	6.2	6.6	5.2	5.6	5.7	6.0	6.5
8H	5.3	5.7	5.8	6.1	6.6	5.2	5.5	5.7	6.0	6.4
12H	5.3	5.6	5.8	6.0	6.5	5.1	5.4	5.6	5.9	6.4
12H 4H	5.4	5.9	5.9	6.3	6.7	5.3	5.7	5.7	6.1	6.5
6H	5.3	5.7	5.8	6.1	6.6	5.2	5.5	5.7	6.0	6.4
8H	5.3	5.6	5.8	6.0	6.5	5.1	5.4	5.6	5.9	6.4
Variations with the observer position at spacings:										
S = 1.0H	+ 3.9 / -14.5					+ 3.9 / -14.8				
1.5H	+ 6.6 / -13.8					+ 6.7 / -14.2				
2.0H	+ 5.2 / - 2.2					+ 5.6 / - 2.8				

CIE Pub.117, 5395 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 5.9)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2025-12-02

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: BXRE-30G10F4-A-83

UTILIZATION FACTORS TABLE

Test:U:110.07V I:0.5194A P:56.623W PF:0.9905 Freq:49.99Hz Lamp Flux:5395.28x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:BXRH-30V10F4-A-83	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	90	84	80	89	83	80	88	83	80	76
0.80	97	91	88	96	91	88	95	90	87	84
1.00	100	95	92	100	95	92	98	94	91	87
1.25	104	99	96	103	99	96	101	97	95	91
1.50	107	102	99	105	101	99	103	100	97	93
2.00	109	105	102	107	104	101	105	102	100	94
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	104	103	96
4.00	114	111	109	112	110	108	108	106	105	97
5.00	115	113	111	113	111	110	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2025-12-02

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: BXRE-30G10F4-A-83

ISOCANDELA DIAGRAM

Test:U:110.07V I:0.5194A P:56.623W PF:0.9905 Freq:49.99Hz Lamp Flux:5395.28x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:BXRH-30V10F4-A-83	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

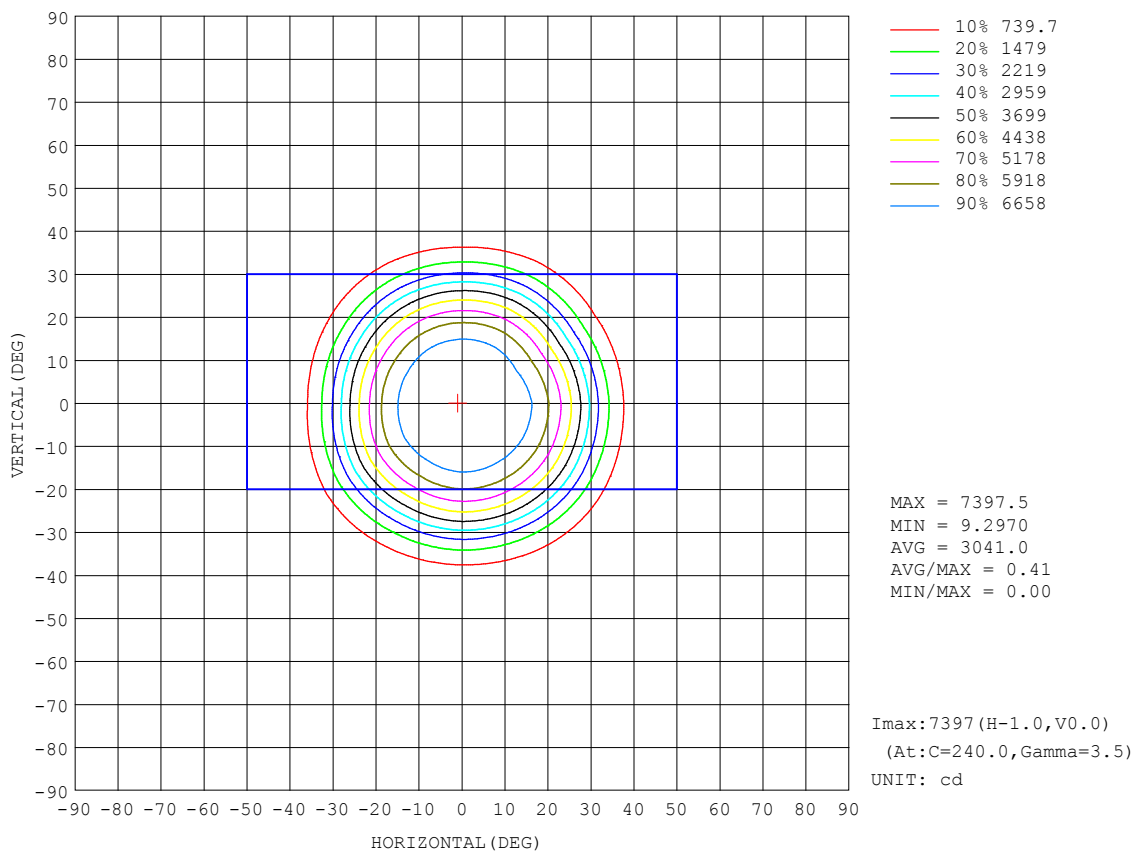


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2025-12-02

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: BXRE-30G10F4-A-83

AAI Figure

Test:U:110.07V I:0.5194A P:56.623W PF:0.9905 Freq:49.99Hz Lamp Flux:5395.28x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:BXRH-30V10F4-A-83	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

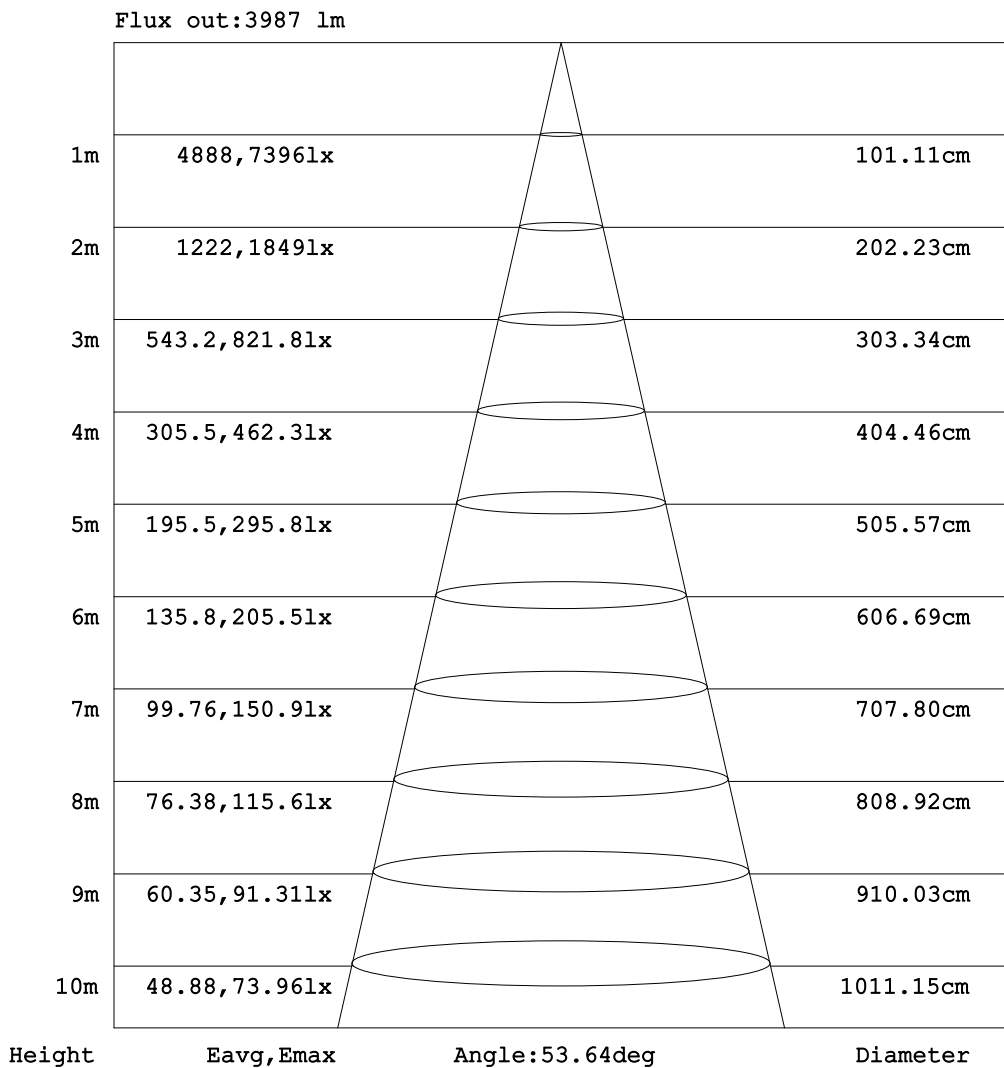


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2025-12-02

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: BXRE-30G10F4-A-83

ISOLUX DIAGRAM

Test:U:110.07V I:0.5194A P:56.623W PF:0.9905 Freq:49.99Hz Lamp Flux:5395.28x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:BXRH-30V10F4-A-83	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

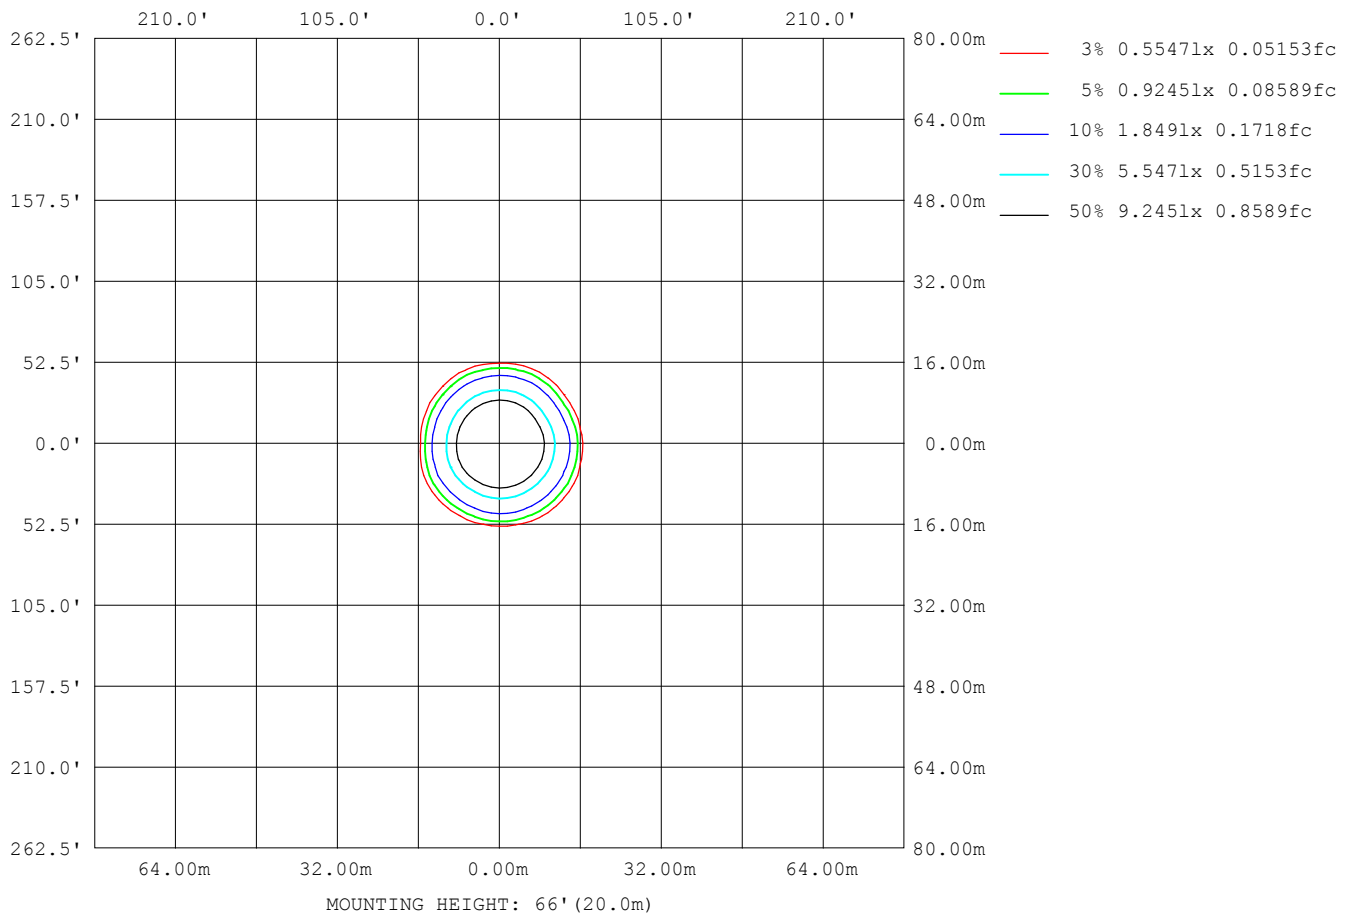

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2025-12-02

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: BXRE-30G10F4-A-83

LED Avg.L Report

Test:U:110.07V I:0.5194A P:56.623W PF:0.9905 Freq:49.99Hz Lamp Flux:5395.28x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:BXRH-30V10F4-A-83	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	130
L_0~180 (75) av	105
L_0~180 (85) av	64
L_90~270 (65) av	130
L_90~270 (75) av	106
L_90~270 (85) av	72
L_45 (65) av	172
L_45 (75) av	113
L_45 (85) av	72

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2025-12-02

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: BXRE-30G10F4-A-83

Planar Illuminance Curve

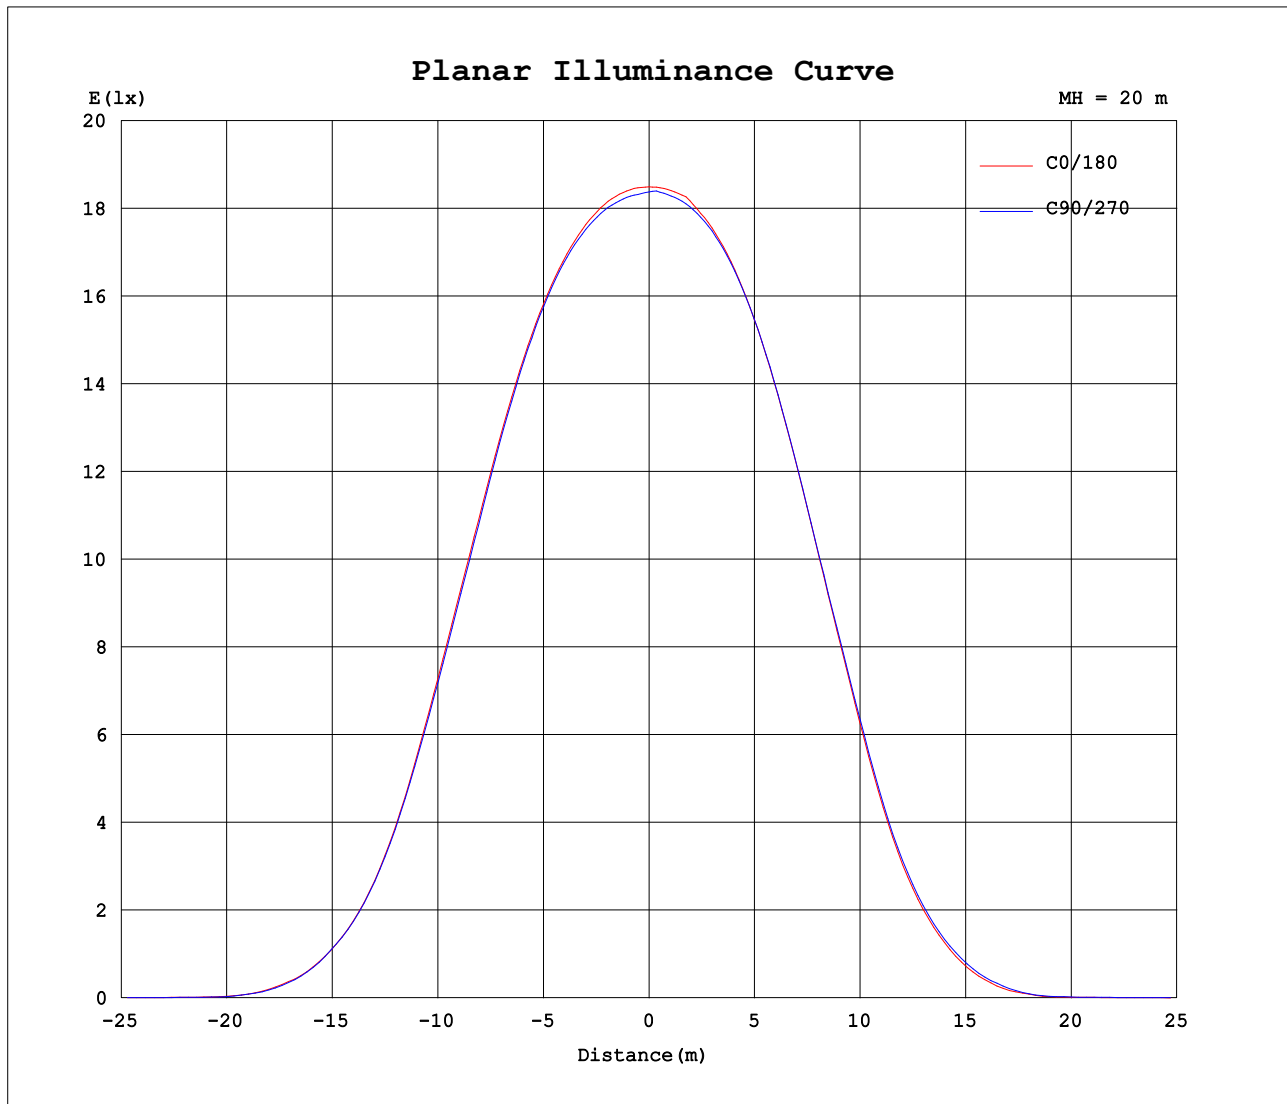

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators:
Test Date: 2025-12-02

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity: 65.0%
Test Distance: 4.234m [K=1.0000]
Remarks: BXRE-30G10F4-A-83

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:110.07V I:0.5194A P:56.623W PF:0.9905 Freq:49.99Hz Lamp Flux:5395.28x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:BXRH-30V10F4-A-83	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	7353	7353	7353	7353	7353	7353	7353	7353	7353	7353	7353	7353						
5	7330	7337	7324	7317	7333	7337	7347	7322	7338	7327	7333	7322						
10	7184	7189	7182	7193	7196	7195	7130	7116	7150	7154	7171	7141						
15	6785	6795	6787	6797	6756	6764	6596	6566	6615	6639	6694	6654						
20	5926	5968	5927	5914	5813	5837	5553	5502	5556	5598	5702	5662						
25	4560	4630	4575	4527	4386	4416	4035	3981	4044	4094	4230	4178						
30	2812	2915	2841	2803	2631	2651	2244	2189	2276	2310	2462	2394						
35	1272	1340	1299	1273	1159	1163	916	911	978	977	1060	1005						
40	385	477	472	376	397	402	194	306	327	244	357	340						
45	45.0	117	137	40.0	76.4	108	23.4	52.6	72.3	29.0	86.2	79.3						
50	17.3	22.2	27.5	15.6	18.2	21.4	12.4	17.1	18.8	13.8	19.9	20.1						
55	10.6	12.3	13.2	9.76	10.8	11.6	8.75	10.1	10.9	9.42	11.4	11.4						
60	9.30	9.22	9.23	8.71	8.57	8.62	7.89	8.40	8.87	8.74	9.08	9.18						
65	6.09	8.07	7.79	5.62	6.91	7.02	4.86	5.50	6.63	5.36	7.21	7.45						
70	4.55	4.87	4.66	4.19	4.41	4.21	3.49	3.85	4.16	3.93	4.37	4.44						
75	3.17	3.36	3.15	2.86	2.94	2.77	2.26	2.47	2.71	2.62	2.90	2.96						
80	1.89	2.03	1.85	1.69	1.68	1.57	1.20	1.32	1.49	1.49	1.66	1.64						
85	0.75	0.91	0.79	0.71	0.64	0.54	0.36	0.40	0.48	0.55	0.64	0.59						
90	0.22	0.23	0.23	0.23	0.23	0.24	0.24	0.25	0.25	0.24	0.24	0.24						
95	0.26	0.29	0.31	0.29	0.32	0.32	0.28	0.31	0.30	0.26	0.29	0.28						
100	0.55	0.57	0.61	0.61	0.65	0.64	0.50	0.54	0.54	0.49	0.48	0.48						
105	1.35	1.35	1.42	1.45	1.53	1.49	1.17	1.23	1.20	1.15	1.07	1.07						
110	2.96	2.92	3.02	3.12	3.23	3.17	2.62	2.68	2.63	2.57	2.40	2.41						
115	5.49	5.41	5.63	5.89	5.87	5.92	5.06	5.04	5.07	4.91	4.63	4.69						
120	8.93	8.76	9.02	9.37	9.37	9.41	8.38	8.28	8.36	8.20	7.76	7.89						
125	13.0	12.8	13.1	13.4	13.5	13.4	12.3	12.2	12.1	12.0	11.6	11.7						
130	17.5	17.4	17.6	17.8	18.1	17.7	16.7	16.4	16.3	16.3	16.0	16.0						
135	22.1	21.9	21.9	22.5	22.7	22.3	20.9	20.8	20.7	20.7	20.4	20.5						
140	26.4	26.4	26.3	26.8	26.7	26.7	25.0	24.9	24.8	24.8	24.6	24.9						
145	30.3	30.2	30.0	30.0	30.3	30.1	28.7	28.2	28.1	28.1	28.1	28.4						
150	32.5	32.5	32.7	32.6	32.7	32.4	30.7	30.4	30.4	30.5	30.7	30.9						
155	33.4	33.8	34.1	34.0	33.9	33.4	31.6	31.4	31.5	31.7	32.1	32.2						
160	32.7	33.1	33.7	33.9	33.5	32.7	31.1	30.9	31.1	31.4	31.9	31.7						
165	31.0	31.5	31.9	31.9	31.6	30.8	29.7	29.4	29.7	30.0	30.8	30.2						
170	29.2	29.5	29.7	29.4	28.8	28.9	28.1	27.8	27.5	28.0	28.8	28.3						
175	28.2	28.6	29.0	28.3	28.2	28.4	27.7	27.7	27.5	27.4	28.2	28.0						
180	28.3	28.4	28.4	28.0	28.3	28.7	28.4	28.4	28.5	27.9	28.4	28.6						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2025-12-02

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: BXRE-30G10F4-A-83