


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:217.66V I:0.1341A P:26.817W PF:0.9187 Freq:49.99Hz Lamp Flux:2660.36x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 99.20 lm/W			
MODEL	GK75-S44QS2_T2	I _{max} (cd)	3425	S/MH(C0/180)	0.82
NOMINAL POWER(W)	2x15	LOR(%)	100.0	S/MH(C90/270)	0.79
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	2660.4	η UP,DN(C0-180)	0.8,50.1
NOMINAL FLUX(lm)	2660.36	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.7,48.4
LAMPS INSIDE	1	η up(%)	1.5	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	220	η down(%)	98.5	CIBSE SHR MAX	0.80

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

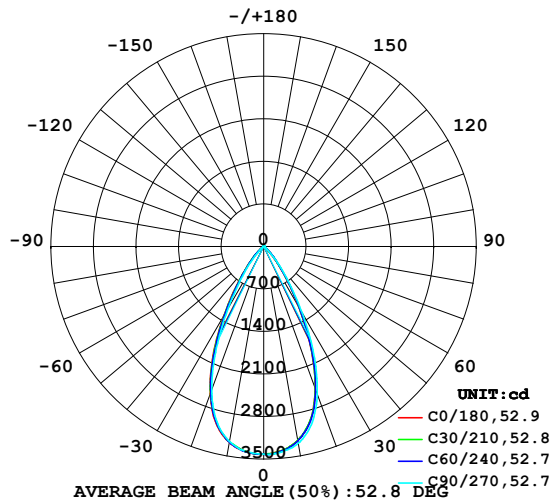

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

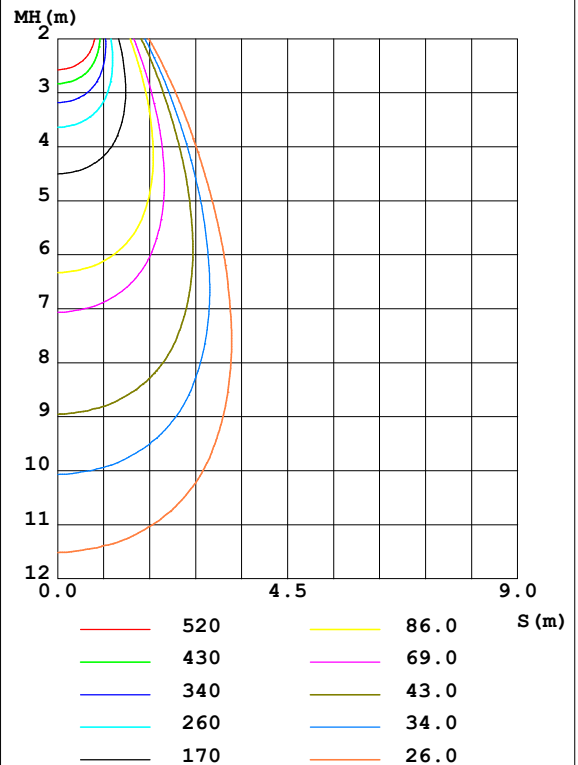

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-23

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3240	3242	3287	3314	3270	3266	3258	3223	0- 10	319.3	319.3	12,12
20	2484	2494	2580	2659	2574	2560	2507	2413	10- 20	828.9	1148	43.2,43.2
30	1170	1189	1276	1378	1307	1273	1164	1073	20- 30	857.0	2005	75.4,75.4
40	328.8	363.6	381.9	431.0	411.3	401.6	326.0	300.9	30- 40	449.2	2454	92.3,92.3
50	39.77	73.85	50.28	98.50	54.21	83.28	38.32	52.44	40- 50	144.1	2599	97.7,97.7
60	0.9501	4.382	1.875	7.534	1.857	5.256	0.9435	2.773	50- 60	21.30	2620	98.5,98.5
70	0.2198	0.2262	0.2207	0.2467	0.2158	0.2198	0.2018	0.1949	60- 70	0.9582	2621	98.5,98.5
80	0.1313	0.1341	0.1263	0.1419	0.1262	0.1278	0.1251	0.1240	70- 80	0.1761	2621	98.5,98.5
90	0.1665	0.1995	0.1521	0.1559	0.1214	0.1475	0.1250	0.1662	80- 90	0.1404	2621	98.5,98.5
100	0.6783	0.6742	0.5815	0.5181	0.4097	0.4450	0.4629	0.5324	90-100	0.3327	2622	98.5,98.5
110	2.186	2.144	1.982	1.789	1.469	1.513	1.632	1.768	100-110	1.126	2623	98.6,98.6
120	5.091	5.021	4.809	4.489	3.891	3.944	4.192	4.406	110-120	2.985	2626	98.7,98.7
130	9.003	8.894	8.668	8.265	7.508	7.523	7.853	8.110	120-130	5.607	2631	98.9,98.9
140	12.99	12.86	12.66	12.22	11.39	11.35	11.72	11.95	130-140	7.860	2639	99.2,99.2
150	15.58	15.56	15.48	15.12	14.24	14.16	14.39	14.66	140-150	8.545	2648	99.5,99.5
160	15.56	15.87	16.17	15.69	14.79	14.89	15.15	15.12	150-160	7.097	2655	99.8,99.8
170	14.57	14.77	14.82	14.60	14.11	14.09	14.27	14.27	160-170	4.251	2659	99.9,99.9
180	14.41	14.57	14.41	14.62	14.47	14.57	14.39	14.60	170-180	1.372	2660	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-23

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:217.66V I:0.1341A P:26.817W PF:0.9187 Freq:49.99Hz Lamp Flux:2660.36x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

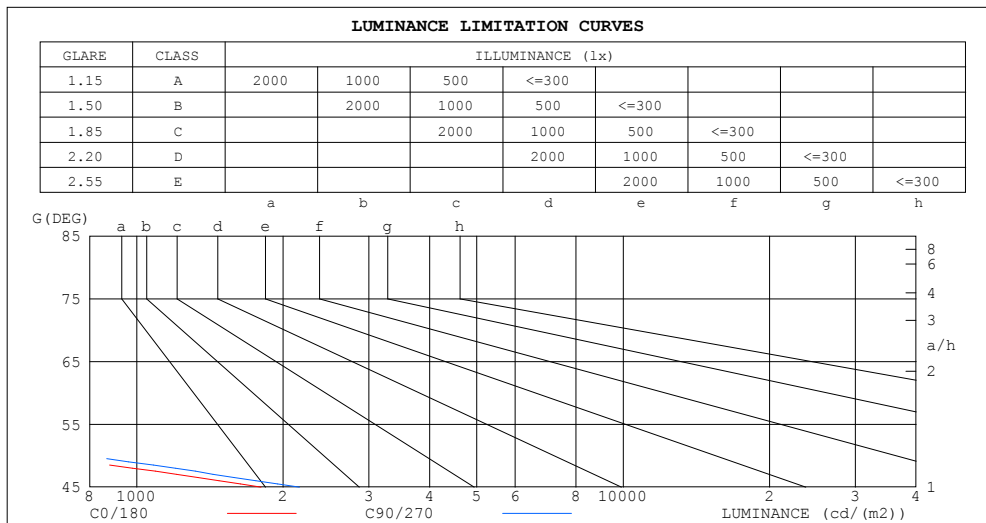

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	13	13
80	8	7
75	7	6
70	6	6
65	7	7
60	19	37
55	136	195
50	624	780
45	1802	2158


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-23

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:217.66V I:0.1341A P:26.817W PF:0.9187 Freq:49.99Hz Lamp Flux:2660.36x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.11	1.08	1.06	1.08	1.06	1.04	1.04	1.02	1.01	1.00	.99	.98	.96	.95	.95	.93
2.0	1.03	.99	.96	1.01	.98	.95	.98	.95	.93	.95	.93	.91	.92	.90	.88	.87
3.0	.97	.92	.88	.95	.91	.87	.92	.89	.86	.90	.87	.84	.87	.85	.83	.81
4.0	.91	.85	.81	.89	.85	.81	.87	.83	.80	.85	.81	.79	.83	.80	.78	.76
5.0	.85	.80	.75	.84	.79	.75	.82	.78	.74	.80	.77	.73	.79	.75	.73	.71
6.0	.80	.74	.70	.79	.74	.70	.78	.73	.69	.76	.72	.69	.75	.71	.68	.67
7.0	.76	.70	.66	.75	.70	.66	.74	.69	.65	.72	.68	.65	.71	.67	.64	.63
8.0	.72	.66	.62	.71	.65	.62	.70	.65	.61	.69	.64	.61	.68	.64	.61	.59
9.0	.68	.62	.58	.67	.62	.58	.66	.61	.58	.65	.61	.58	.64	.60	.57	.56
10.0	.64	.59	.55	.64	.59	.55	.63	.58	.55	.62	.58	.55	.61	.57	.54	.53

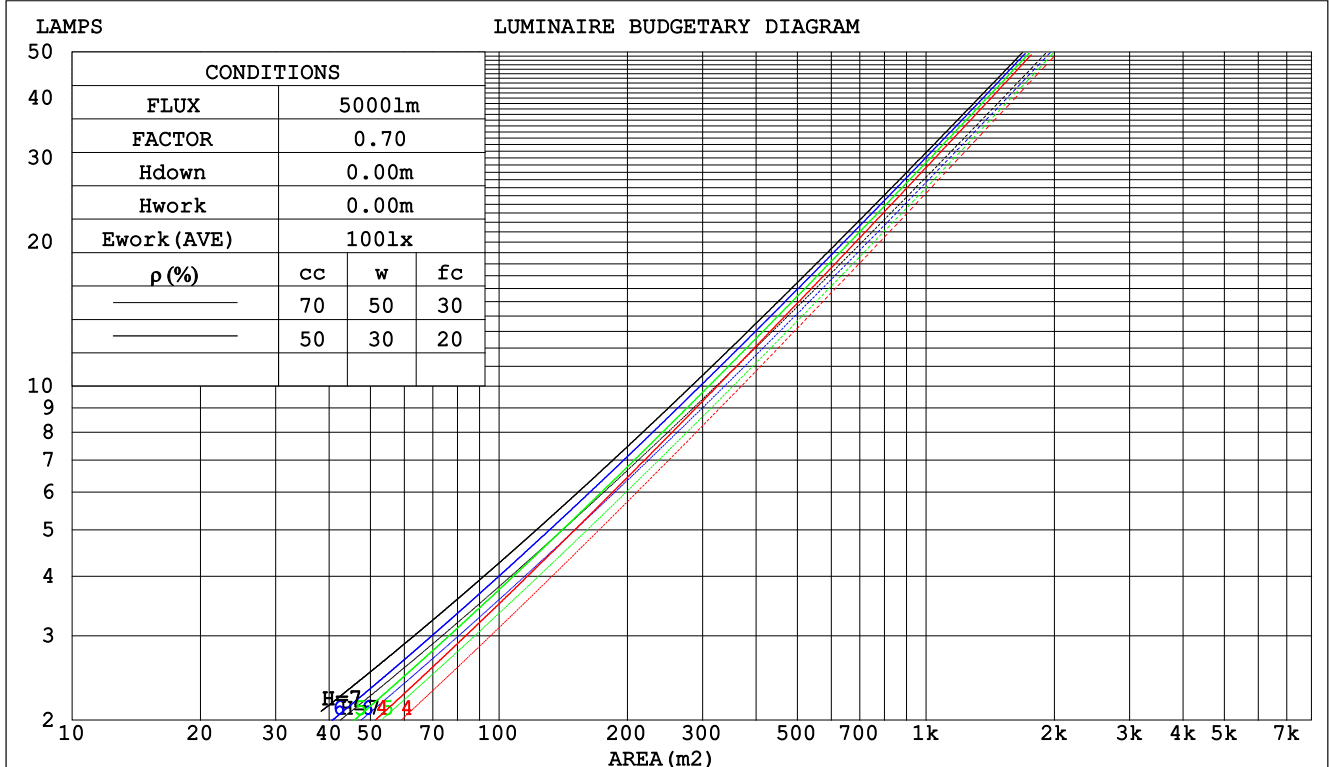

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-23

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:217.66V I:0.1341A P:26.817W PF:0.9187 Freq:49.99Hz Lamp Flux:2660.36x1 lm					
NAME:		TYPE:COB		WEIGHT:	
SPEC.:3000K		DIM.: 9mm		SERIAL No.:	
MFR.: Hangzhou XRZLux Co.,Ltd		SUR.:		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.172	.098	.031	.165	.094	.030	.152	.087	.028	.140	.080	.026	.128	.074	.024	
2.0	.165	.090	.028	.159	.087	.027	.147	.082	.025	.137	.077	.024	.127	.072	.023	
3.0	.157	.083	.025	.152	.081	.024	.142	.077	.023	.133	.073	.022	.125	.069	.021	
4.0	.149	.078	.023	.145	.076	.022	.136	.072	.022	.129	.069	.021	.121	.066	.020	
5.0	.142	.073	.021	.139	.071	.021	.131	.068	.020	.124	.066	.020	.118	.063	.019	
6.0	.136	.068	.020	.133	.067	.019	.126	.065	.019	.120	.062	.018	.114	.060	.018	
7.0	.130	.064	.018	.127	.063	.018	.121	.061	.018	.116	.059	.017	.111	.058	.017	
8.0	.125	.061	.017	.122	.060	.017	.117	.058	.017	.112	.057	.016	.107	.055	.016	
9.0	.119	.058	.016	.117	.057	.016	.112	.056	.016	.108	.054	.015	.104	.053	.015	
10.0	.115	.055	.015	.112	.054	.015	.108	.053	.015	.104	.052	.015	.100	.051	.015	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.202	.202	.202	.172	.172	.172	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.182	.169	.157	.156	.145	.135	.107	.100	.093	.061	.058	.054	.020	.019	.018	
2.0	.167	.144	.125	.143	.124	.108	.098	.086	.075	.056	.050	.044	.018	.016	.014	
3.0	.154	.125	.102	.132	.108	.088	.091	.075	.062	.052	.044	.036	.017	.014	.012	
4.0	.144	.110	.085	.123	.095	.074	.085	.066	.052	.049	.039	.031	.016	.013	.010	
5.0	.135	.099	.072	.116	.085	.062	.080	.060	.044	.046	.035	.026	.015	.011	.009	
6.0	.128	.089	.062	.110	.077	.054	.076	.054	.038	.044	.032	.023	.014	.010	.007	
7.0	.121	.082	.054	.104	.071	.047	.072	.050	.033	.042	.029	.020	.014	.010	.007	
8.0	.115	.076	.048	.099	.065	.042	.069	.046	.030	.040	.027	.018	.013	.009	.006	
9.0	.110	.070	.043	.095	.061	.038	.066	.043	.027	.038	.025	.016	.012	.008	.005	
10.0	.106	.066	.039	.091	.057	.034	.063	.040	.024	.037	.024	.015	.012	.008	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-23

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:217.66V I:0.1341A P:26.817W PF:0.9187 Freq:49.99Hz Lamp Flux:2660.36x1 lm										
NAME:			TYPE:COB			WEIGHT:				
SPEC.:3000K			DIM.: 9mm			SERIAL No.:				
MFR.: Hangzhou XRZLux Co.,Ltd			SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	6.9	7.8	7.1	8.0	8.2	7.3	8.2	7.5	8.4	8.6
3H	6.7	7.6	7.0	7.8	8.0	7.1	7.9	7.4	8.2	8.4
4H	6.6	7.4	6.9	7.7	7.9	7.0	7.8	7.3	8.0	8.3
6H	6.5	7.3	6.9	7.5	7.8	6.9	7.6	7.2	7.9	8.2
8H	6.5	7.2	6.8	7.5	7.8	6.9	7.6	7.2	7.9	8.1
12H	6.4	7.1	6.8	7.4	7.7	6.8	7.5	7.2	7.8	8.1
4H 2H	6.6	7.4	6.9	7.7	7.9	7.0	7.8	7.3	8.0	8.3
3H	6.5	7.1	6.8	7.4	7.7	6.8	7.5	7.2	7.8	8.1
4H	6.4	7.0	6.7	7.3	7.6	6.7	7.3	7.1	7.7	8.0
6H	6.3	6.8	6.7	7.1	7.5	6.6	7.2	7.0	7.5	7.9
8H	6.2	6.7	6.6	7.1	7.5	6.6	7.1	7.0	7.4	7.8
12H	6.1	6.6	6.6	7.0	7.4	6.5	7.0	7.0	7.4	7.8
8H 4H	6.2	6.7	6.6	7.1	7.5	6.6	7.1	7.0	7.4	7.8
6H	6.1	6.5	6.5	6.9	7.4	6.5	6.9	6.9	7.3	7.7
8H	6.0	6.4	6.5	6.8	7.3	6.4	6.8	6.9	7.2	7.7
12H	6.0	6.3	6.5	6.8	7.3	6.4	6.7	6.8	7.1	7.6
12H 4H	6.1	6.6	6.6	7.0	7.4	6.5	7.0	7.0	7.4	7.8
6H	6.0	6.4	6.5	6.8	7.3	6.4	6.8	6.9	7.2	7.7
8H	6.0	6.3	6.5	6.8	7.3	6.4	6.7	6.8	7.1	7.6
Variations with the observer position at spacings:										
S = 1.0H	+ 2.9 / -22.2					+ 3.2 / -20.3				
1.5H	+ 5.0 / -12.4					+ 5.2 / -10.5				
2.0H	+ 6.6 / -23.4					+ 6.5 / -21.5				

CIE Pub.117, 2660 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 3.4)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-23

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:217.66V I:0.1341A P:26.817W PF:0.9187 Freq:49.99Hz Lamp Flux:2660.36x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	87	80	77	86	80	76	85	80	76	73
0.80	94	88	85	93	88	84	92	87	84	80
1.00	99	93	90	98	93	89	96	92	89	85
1.25	103	98	94	102	97	94	100	96	93	88
1.50	106	101	98	104	100	97	102	98	96	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	107	104	106	104	102	95
4.00	113	111	108	111	109	107	107	106	104	96
5.00	115	112	111	112	110	109	108	107	105	97
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-23

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:217.66V I:0.1341A P:26.817W PF:0.9187 Freq:49.99Hz Lamp Flux:2660.36x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

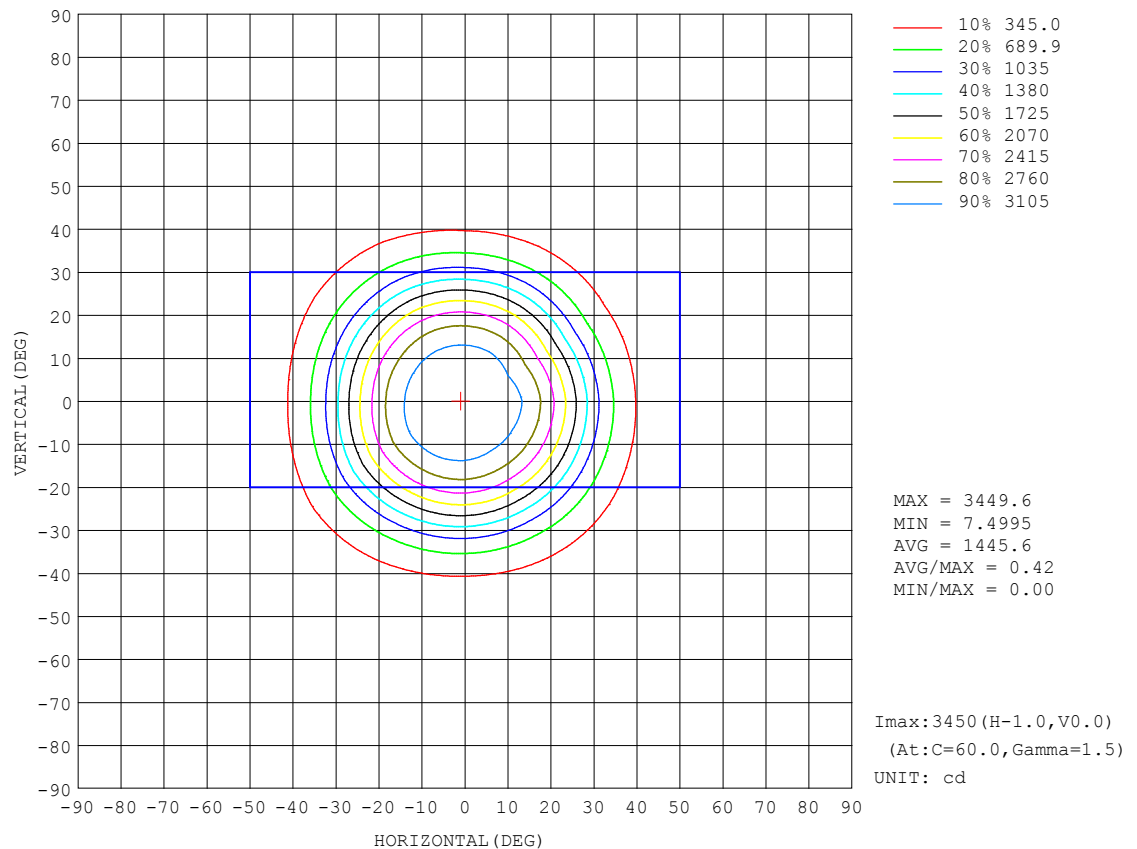


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-23

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

AAI Figure

Test:U:217.66V I:0.1341A P:26.817W PF:0.9187 Freq:49.99Hz Lamp Flux:2660.36x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

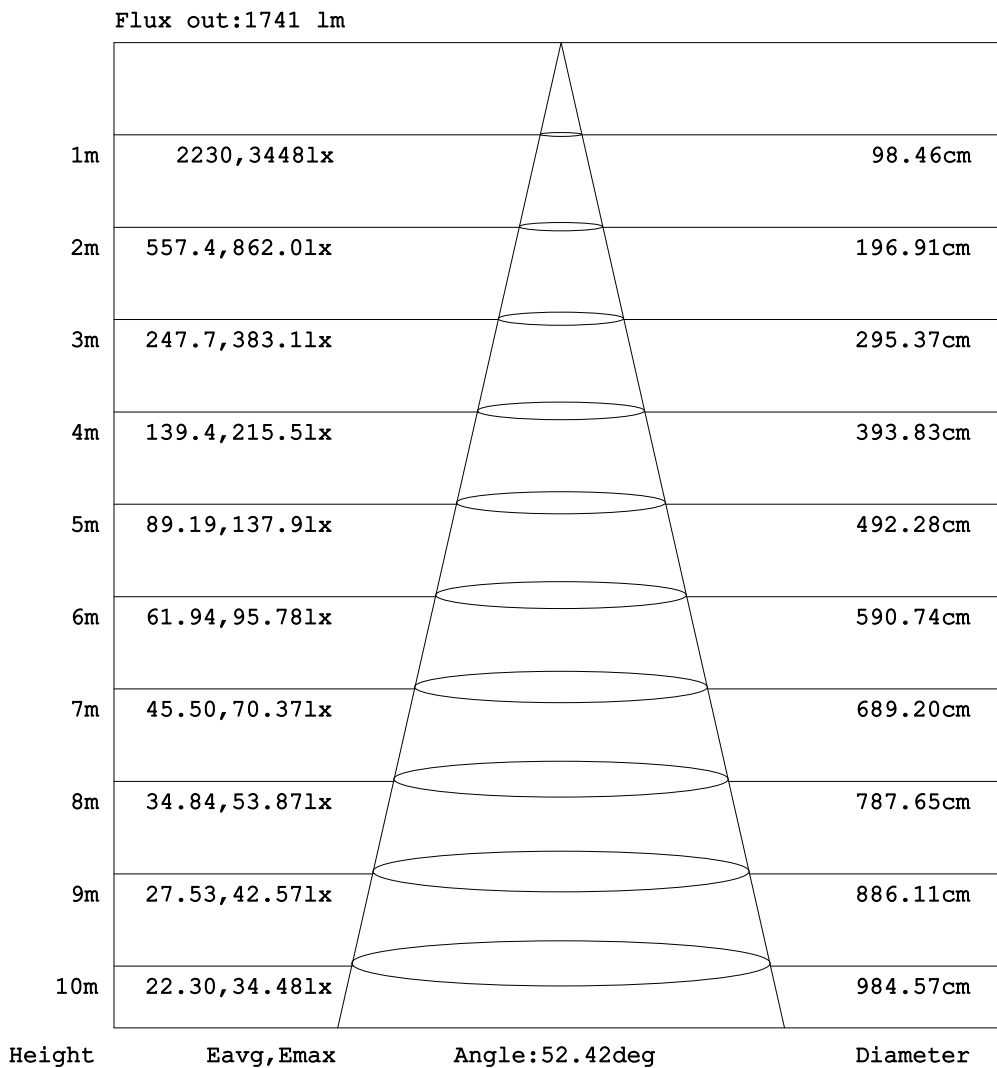


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:2026-04-23

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:4.234m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:217.66V I:0.1341A P:26.817W PF:0.9187 Freq:49.99Hz Lamp Flux:2660.36x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

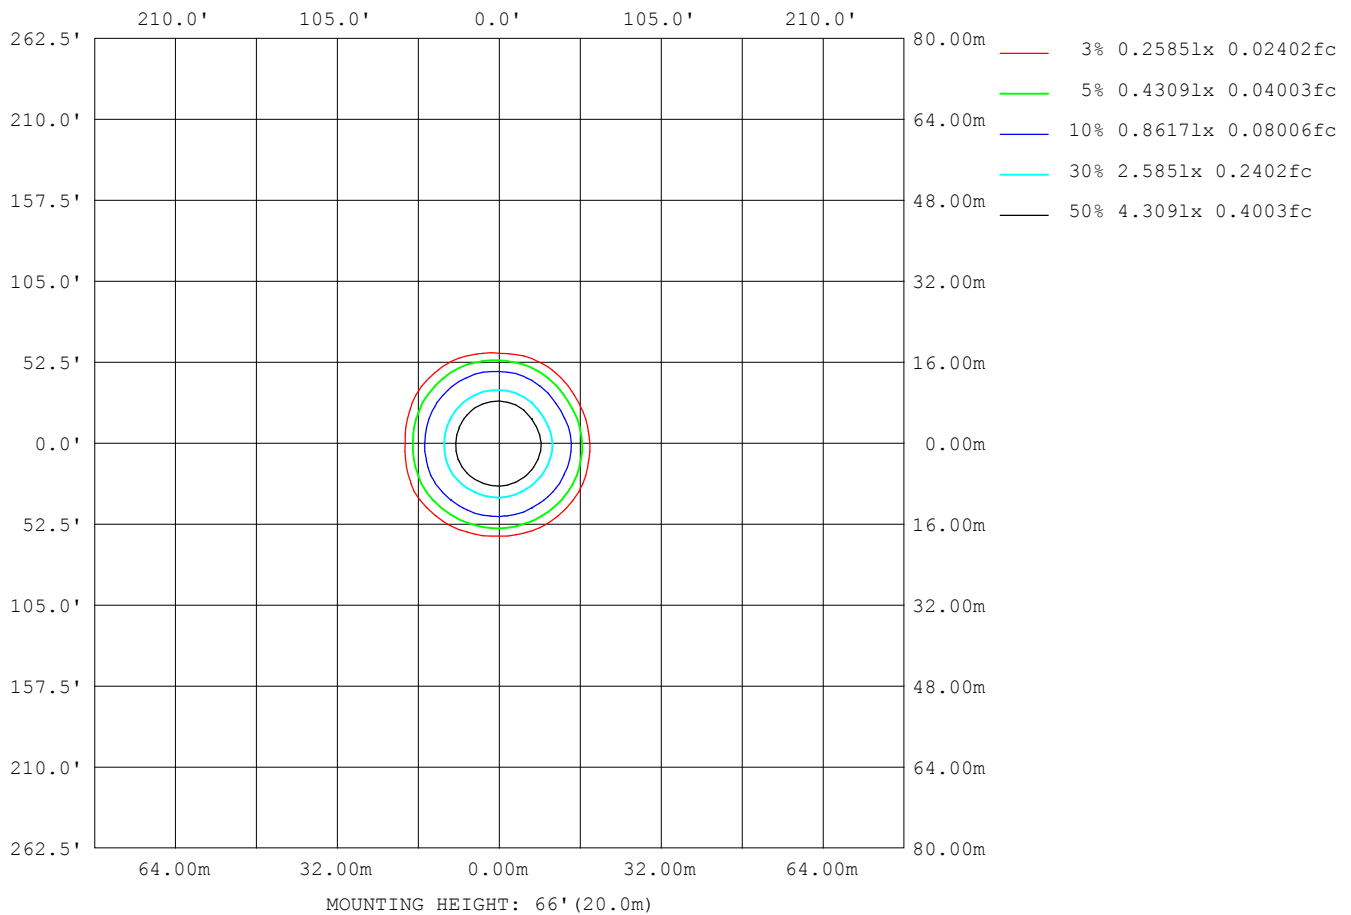

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-23

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:217.66V I:0.1341A P:26.817W PF:0.9187 Freq:49.99Hz Lamp Flux:2660.36x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	7
L_0~180 (75) av	6
L_0~180 (85) av	13
L_90~270 (65) av	7
L_90~270 (75) av	6
L_90~270 (85) av	13
L_45 (65) av	16
L_45 (75) av	6
L_45 (85) av	15

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-23

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

Planar Illuminance Curve

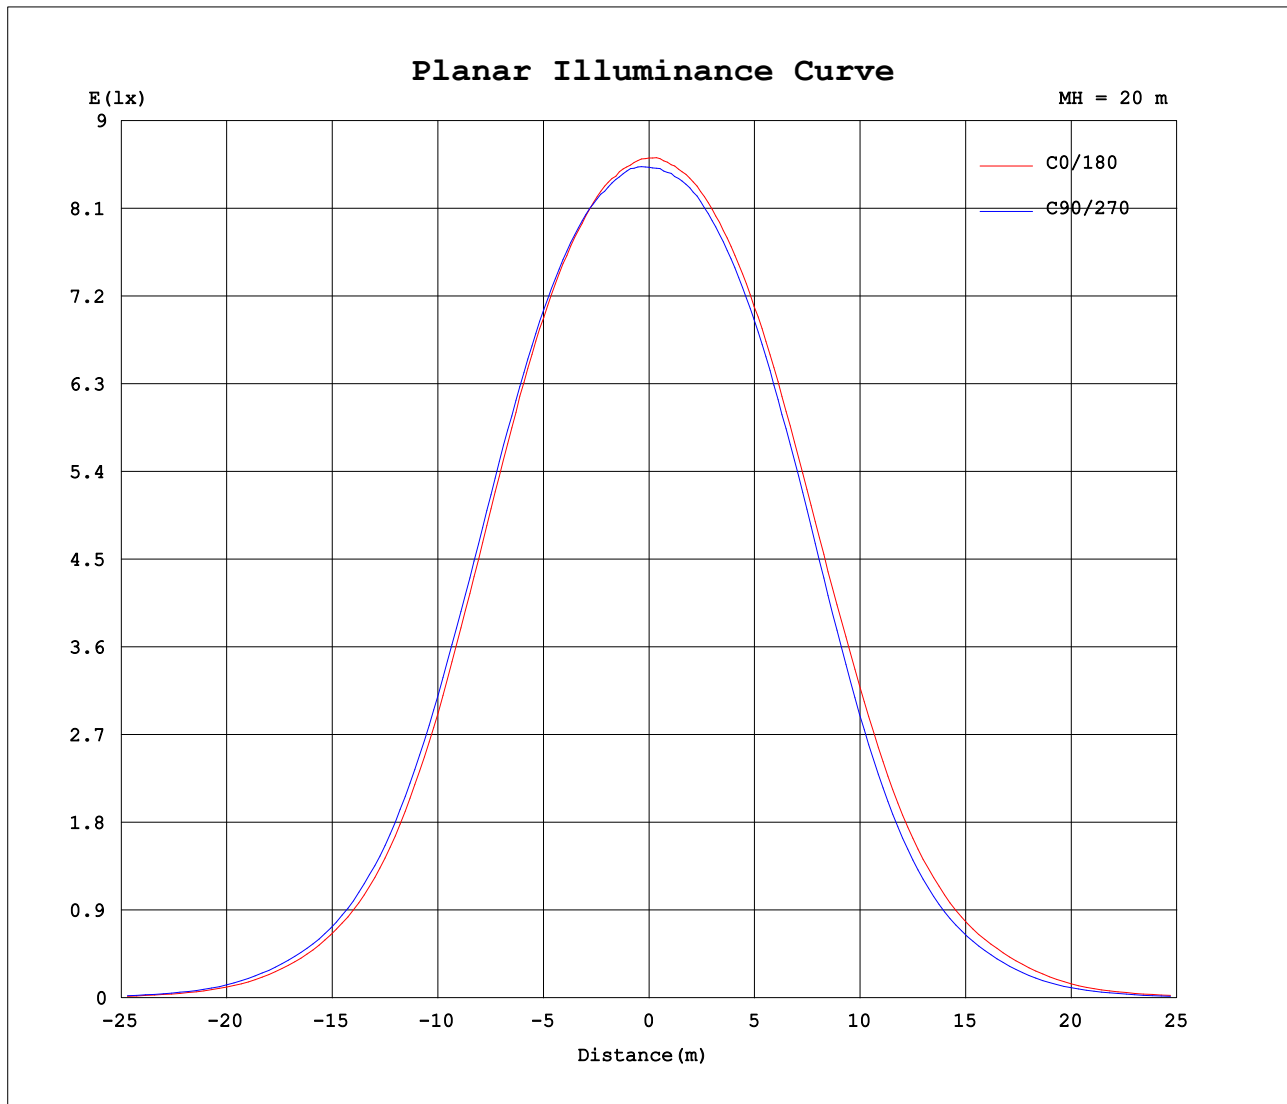

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators:
 Test Date: 2026-04-23

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 4.234m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:217.66V I:0.1341A P:26.817W PF:0.9187 Freq:49.99Hz Lamp Flux:2660.36x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 9mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	3419	3419	3419	3419	3419	3419	3419	3419	3419	3419	3419	3419						
5	3375	3371	3380	3393	3400	3405	3392	3386	3392	3387	3377	3358						
10	3240	3238	3246	3287	3307	3321	3270	3262	3270	3258	3246	3200						
15	2968	2962	2976	3036	3076	3105	3024	3004	3008	2985	2962	2885						
20	2484	2484	2504	2580	2631	2688	2574	2568	2551	2507	2461	2366						
25	1838	1853	1864	1954	2009	2100	1975	1950	1925	1844	1791	1696						
30	1170	1184	1195	1276	1331	1426	1307	1289	1256	1164	1116	1029						
35	652	673	680	728	765	837	765	752	722	646	604	554						
40	329	360	367	382	410	452	411	413	390	326	314	287						
45	126	180	195	153	218	249	164	224	202	120	157	131						
50	39.8	69.0	78.8	50.3	81.7	115	54.2	88.2	78.4	38.3	57.7	47.2						
55	7.72	18.9	26.1	11.2	24.6	38.1	12.6	29.5	23.2	7.78	16.8	11.8						
60	0.95	3.53	5.23	1.87	5.45	9.61	1.86	5.80	4.71	0.94	3.28	2.27						
65	0.30	0.43	0.55	0.31	0.73	1.44	0.31	0.70	0.52	0.27	0.35	0.28						
70	0.22	0.22	0.23	0.22	0.24	0.25	0.22	0.23	0.21	0.20	0.19	0.20						
75	0.17	0.17	0.17	0.17	0.18	0.18	0.16	0.17	0.16	0.15	0.15	0.15						
80	0.13	0.13	0.14	0.13	0.14	0.14	0.13	0.13	0.12	0.13	0.13	0.12						
85	0.12	0.14	0.14	0.12	0.13	0.13	0.11	0.12	0.12	0.11	0.12	0.12						
90	0.17	0.20	0.20	0.15	0.16	0.16	0.12	0.14	0.15	0.13	0.16	0.17						
95	0.34	0.36	0.35	0.29	0.28	0.27	0.21	0.24	0.25	0.23	0.28	0.30						
100	0.68	0.68	0.67	0.58	0.54	0.50	0.41	0.44	0.45	0.46	0.51	0.56						
105	1.26	1.26	1.22	1.12	1.03	0.95	0.79	0.82	0.84	0.90	0.95	1.03						
110	2.19	2.17	2.12	1.98	1.85	1.72	1.47	1.50	1.53	1.63	1.71	1.83						
115	3.47	3.45	3.39	3.22	3.05	2.87	2.49	2.52	2.57	2.73	2.83	3.00						
120	5.09	5.05	4.99	4.81	4.60	4.37	3.89	3.91	3.98	4.19	4.30	4.52						
125	6.98	6.92	6.84	6.66	6.42	6.16	5.60	5.59	5.67	5.93	6.04	6.30						
130	9.00	8.94	8.84	8.67	8.41	8.12	7.51	7.48	7.57	7.85	7.97	8.25						
135	11.1	11.0	10.9	10.7	10.4	10.1	9.49	9.42	9.54	9.83	9.94	10.2						
140	13.0	12.9	12.8	12.7	12.4	12.1	11.4	11.3	11.4	11.7	11.8	12.1						
145	14.5	14.5	14.4	14.3	14.0	13.8	13.0	12.9	13.0	13.3	13.4	13.6						
150	15.6	15.6	15.6	15.5	15.2	15.0	14.2	14.1	14.2	14.4	14.6	14.8						
155	15.9	15.9	16.2	16.1	15.9	15.5	14.8	14.8	14.9	15.1	15.2	15.2						
160	15.6	15.7	16.1	16.2	15.9	15.5	14.8	14.8	15.0	15.2	15.2	15.0						
165	15.0	15.2	15.4	15.5	15.3	15.1	14.5	14.4	14.6	14.8	14.9	14.8						
170	14.6	14.7	14.8	14.8	14.6	14.6	14.1	14.1	14.1	14.3	14.4	14.2						
175	14.3	14.5	14.8	14.5	14.4	14.5	14.1	14.2	14.2	14.1	14.4	14.3						
180	14.4	14.6	14.6	14.4	14.6	14.7	14.5	14.5	14.6	14.4	14.6	14.6						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-23

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: