


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:217.70V I:0.2830A P:57.157W PF:0.9276 Freq:49.99Hz Lamp Flux:3821.96x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 66.87 lm/W			
MODEL	GK75-S44QS4_T4	Imax(cd)	12240	S/MH(C0/180)	0.46
NOMINAL POWER(W)	4x15	LOR(%)	100.0	S/MH(C90/270)	0.47
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	3822.0	η UP,DN(C0-180)	0.8,52.9
NOMINAL FLUX(lm)	3821.96	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.7,45.7
LAMPS INSIDE	1	η up(%)	1.5	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	220	η down(%)	98.5	CIBSE SHR MAX	0.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

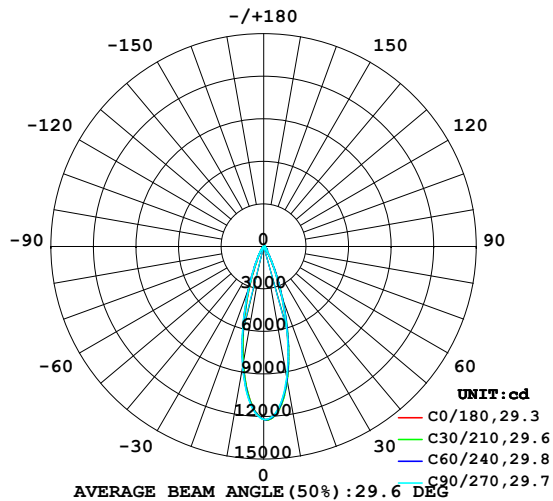

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

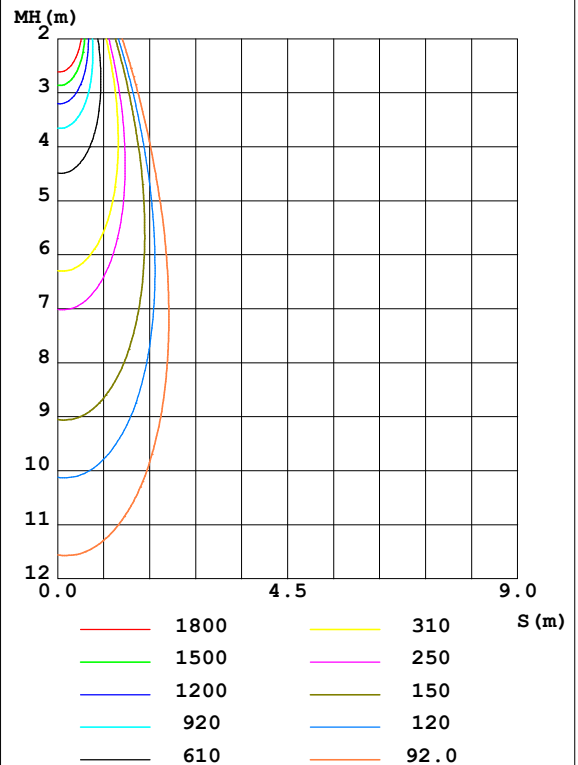

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	949.4	954.9	937.5	913.9	836.0	842.7	859.1	870.8	0- 10	1003	1003	26.2,26.2
20	368.4	387.3	370.1	337.2	278.9	293.8	306.4	302.8	10- 20	1618	2621	68.6,68.6
30	83.10	92.36	88.51	73.81	61.22	67.41	69.13	66.50	20- 30	769.6	3390	88.7,88.7
40	24.12	26.09	24.40	22.15	18.77	20.76	20.32	20.62	30- 40	257.1	3647	95.4,95.4
50	4.346	8.140	4.344	6.769	2.547	5.599	2.974	5.755	40- 50	98.87	3746	98,98
60	0.1836	0.5435	0.1798	0.4470	0.0755	0.2755	0.0842	0.3371	50- 60	17.90	3764	98.5,98.5
70	0.0282	0.0282	0.0268	0.0267	0.0247	0.0248	0.0254	0.0246	60- 70	0.8622	3765	98.5,98.5
80	0.0181	0.0180	0.0169	0.0178	0.0174	0.0176	0.0177	0.0174	70- 80	0.2235	3765	98.5,98.5
90	0.0165	0.0190	0.0180	0.0194	0.0191	0.0208	0.0180	0.0193	80- 90	0.1877	3765	98.5,98.5
100	0.0398	0.0423	0.0432	0.0436	0.0424	0.0440	0.0408	0.0387	90-100	0.3084	3766	98.5,98.5
110	0.1220	0.1290	0.1363	0.1347	0.1216	0.1258	0.1178	0.1049	100-110	0.7774	3766	98.5,98.5
120	0.4326	0.4469	0.4702	0.4755	0.4207	0.4262	0.4034	0.3666	110-120	2.436	3769	98.6,98.6
130	1.156	1.165	1.205	1.228	1.133	1.126	1.087	1.037	120-130	6.690	3776	98.8,98.8
140	2.062	2.054	2.088	2.115	2.034	2.003	1.974	1.942	130-140	12.24	3788	99.1,99.1
150	2.624	2.601	2.613	2.605	2.534	2.486	2.507	2.524	140-150	14.67	3802	99.5,99.5
160	2.524	2.526	2.550	2.450	2.298	2.274	2.359	2.418	150-160	11.80	3814	99.8,99.8
170	1.918	1.926	1.877	1.802	1.658	1.643	1.697	1.767	160-170	6.127	3820	100,100
180	1.443	1.476	1.413	1.451	1.450	1.475	1.407	1.451	170-180	1.541	3822	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:217.70V I:0.2830A P:57.157W PF:0.9276 Freq:49.99Hz Lamp Flux:3821.96x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

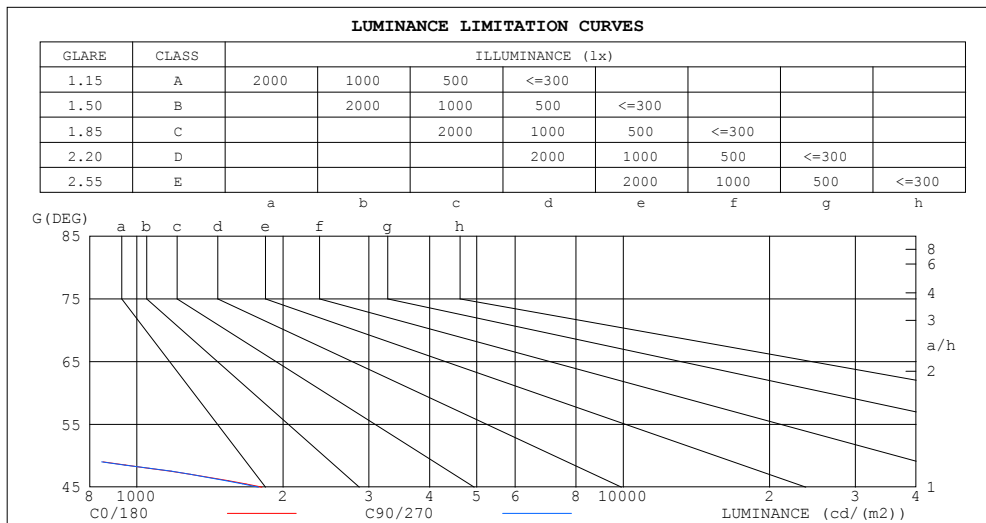

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	18	18
80	10	10
75	9	8
70	8	8
65	9	8
60	37	36
55	153	150
50	681	675
45	1809	1778


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:217.70V I:0.2830A P:57.157W PF:0.9276 Freq:49.99Hz Lamp Flux:3821.96x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.05	1.04	1.03	1.01	1.00	.99	.98	.97	.96	.94
2.0	1.06	1.03	.00	1.04	1.01	.99	1.01	.98	.96	.98	.96	.94	.95	.93	.92	.90
3.0	1.01	.97	.93	.99	.96	.93	.96	.93	.91	.94	.92	.89	.92	.90	.88	.86
4.0	.96	.92	.88	.95	.91	.88	.93	.89	.86	.91	.88	.85	.89	.86	.84	.83
5.0	.92	.87	.84	.91	.86	.83	.89	.85	.82	.87	.84	.82	.86	.83	.81	.80
6.0	.88	.83	.80	.87	.83	.80	.86	.82	.79	.84	.81	.78	.83	.80	.78	.76
7.0	.84	.80	.76	.84	.79	.76	.82	.79	.76	.81	.78	.75	.80	.77	.75	.74
8.0	.81	.77	.73	.81	.76	.73	.80	.76	.73	.79	.75	.72	.78	.74	.72	.71
9.0	.78	.74	.71	.78	.73	.70	.77	.73	.70	.76	.72	.70	.75	.72	.70	.69
10.0	.76	.71	.68	.75	.71	.68	.74	.70	.68	.74	.70	.67	.73	.70	.67	.66

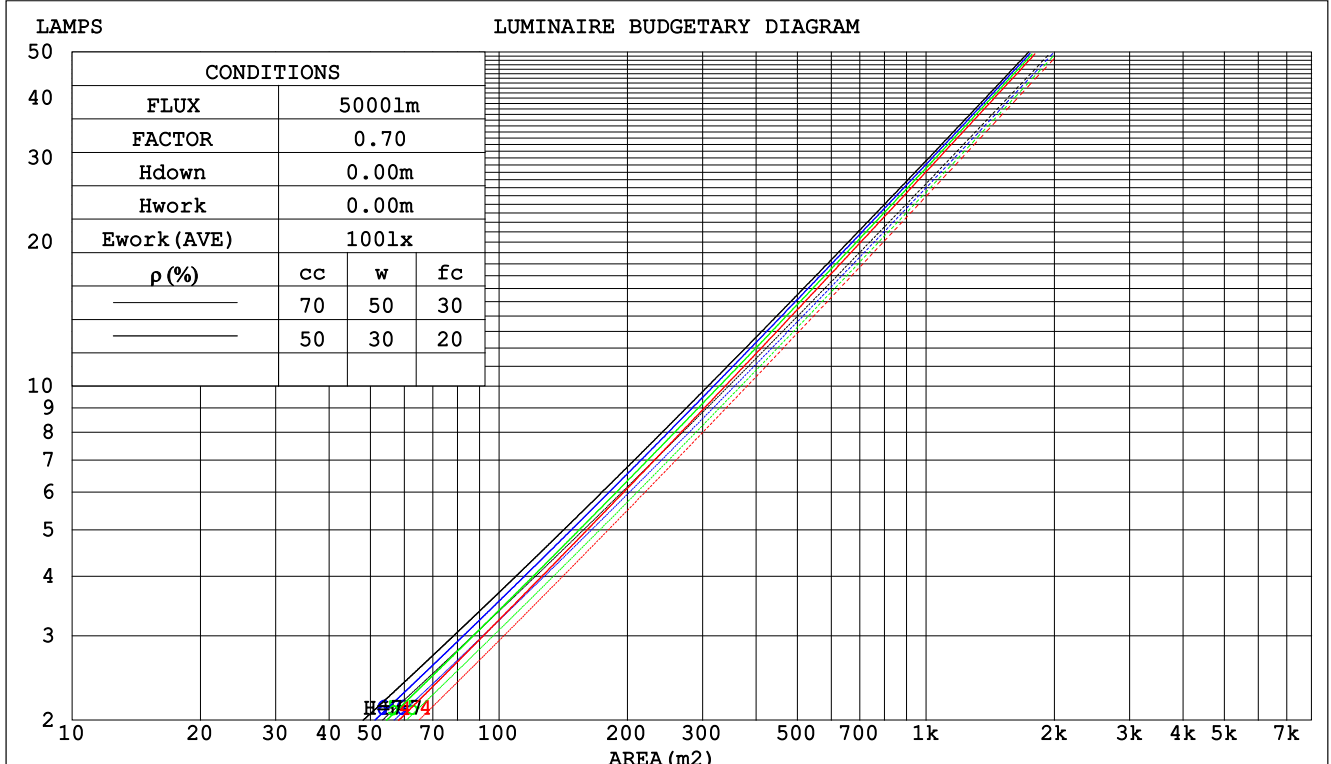

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:217.70V I:0.2830A P:57.157W PF:0.9276 Freq:49.99Hz Lamp Flux:3821.96x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

pcc	80%	70%	50%	30%	10%	0
pw	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
pfc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)					
0.0						
1.0	.149 .085 .027	.142 .081 .026	.129 .074 .024	.116 .067 .022	.105 .061 .020	
2.0	.140 .077 .023	.134 .074 .023	.123 .068 .021	.112 .063 .020	.103 .058 .018	
3.0	.131 .070 .021	.126 .068 .020	.117 .063 .019	.108 .059 .018	.100 .055 .017	
4.0	.124 .064 .019	.119 .063 .018	.111 .059 .018	.104 .056 .017	.097 .053 .016	
5.0	.117 .060 .017	.113 .058 .017	.106 .055 .016	.100 .053 .016	.094 .050 .015	
6.0	.111 .056 .016	.108 .055 .016	.102 .052 .015	.096 .050 .015	.091 .048 .014	
7.0	.106 .052 .015	.103 .051 .015	.098 .049 .014	.093 .048 .014	.088 .046 .013	
8.0	.101 .049 .014	.099 .049 .014	.094 .047 .013	.089 .045 .013	.085 .044 .013	
9.0	.097 .047 .013	.095 .046 .013	.090 .045 .013	.086 .043 .012	.083 .042 .012	
10.0	.093 .045 .012	.091 .044 .012	.087 .043 .012	.083 .041 .012	.080 .040 .012	

pcc	80%	70%	50%	30%	10%	0
pw	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
pfc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)					
0.0	.202 .202 .202	.172 .172 .172	.118 .118 .118	.068 .068 .068	.022 .022 .022	
1.0	.181 .169 .158	.154 .145 .136	.106 .100 .094	.061 .058 .055	.019 .019 .018	
2.0	.163 .144 .128	.140 .124 .111	.096 .086 .077	.055 .050 .045	.018 .016 .015	
3.0	.149 .125 .105	.128 .108 .091	.088 .075 .064	.051 .044 .038	.016 .014 .012	
4.0	.137 .110 .089	.118 .095 .077	.081 .066 .054	.047 .039 .032	.015 .013 .011	
5.0	.128 .098 .076	.110 .085 .066	.075 .059 .046	.044 .035 .028	.014 .011 .009	
6.0	.119 .088 .066	.102 .076 .057	.071 .053 .040	.041 .031 .024	.013 .010 .008	
7.0	.112 .080 .058	.096 .069 .050	.067 .049 .036	.039 .029 .021	.012 .009 .007	
8.0	.106 .073 .051	.091 .064 .045	.063 .045 .032	.037 .026 .019	.012 .009 .006	
9.0	.100 .068 .046	.086 .059 .040	.060 .041 .028	.035 .024 .017	.011 .008 .006	
10.0	.096 .063 .042	.082 .055 .036	.057 .039 .026	.033 .023 .015	.011 .008 .005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:217.70V I:0.2830A P:57.157W PF:0.9276 Freq:49.99Hz Lamp Flux:3821.96x1 lm										
NAME:			TYPE:COB			WEIGHT:				
SPEC.:3000K			DIM.: 6mm			SERIAL No.:				
MFR.: Hangzhou XRZLux Co.,Ltd			SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2.3	3.0	2.5	3.2	3.4	2.4	3.1	2.6	3.3	3.5
3H	2.2	2.8	2.4	3.0	3.3	2.2	2.9	2.5	3.1	3.3
4H	2.1	2.7	2.4	2.9	3.2	2.1	2.8	2.4	3.0	3.2
6H	2.0	2.6	2.3	2.8	3.1	2.0	2.6	2.4	2.9	3.2
8H	1.9	2.5	2.3	2.8	3.1	2.0	2.6	2.3	2.8	3.1
12H	1.9	2.4	2.2	2.7	3.0	1.9	2.5	2.3	2.8	3.1
4H 2H	2.1	2.7	2.4	3.0	3.2	2.1	2.8	2.4	3.0	3.3
3H	1.9	2.5	2.2	2.7	3.0	2.0	2.5	2.3	2.8	3.1
4H	1.8	2.3	2.2	2.6	3.0	1.9	2.4	2.2	2.7	3.0
6H	1.7	2.2	2.1	2.5	2.9	1.8	2.2	2.2	2.6	2.9
8H	1.6	2.1	2.1	2.4	2.8	1.7	2.1	2.1	2.5	2.9
12H	1.6	2.0	2.0	2.4	2.8	1.7	2.0	2.1	2.4	2.8
8H 4H	1.6	2.1	2.1	2.4	2.8	1.7	2.1	2.1	2.5	2.9
6H	1.5	1.9	2.0	2.3	2.7	1.6	1.9	2.0	2.4	2.8
8H	1.5	1.8	1.9	2.2	2.7	1.5	1.8	2.0	2.3	2.7
12H	1.4	1.7	1.9	2.1	2.6	1.5	1.7	2.0	2.2	2.7
12H 4H	1.6	2.0	2.0	2.4	2.8	1.6	2.0	2.1	2.4	2.8
6H	1.5	1.8	1.9	2.2	2.7	1.5	1.8	2.0	2.3	2.7
8H	1.4	1.7	1.9	2.1	2.6	1.5	1.7	2.0	2.2	2.7
Variations with the observer position at spacings:										
S = 1.0H	+ 2.6 / -17.9					+ 2.6 / -18.0				
1.5H	+ 3.9 / - 8.3					+ 4.0 / - 8.5				
2.0H	+ 6.1 / -19.9					+ 6.0 / -20.1				

CIE Pub.117, 3822 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 4.7)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:217.70V I:0.2830A P:57.157W PF:0.9276 Freq:49.99Hz Lamp Flux:3821.96x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	79	88	82	79	87	82	79	75
0.80	96	90	87	95	90	87	94	89	86	83
1.00	100	95	91	99	94	91	97	94	90	86
1.25	104	99	96	103	98	95	101	97	94	90
1.50	106	102	99	105	101	98	103	99	97	92
2.00	109	105	102	107	104	101	104	102	99	94
2.50	110	107	104	109	105	103	105	103	101	95
3.00	112	109	106	110	107	105	106	104	102	96
4.00	114	111	109	112	109	108	108	106	105	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:217.70V I:0.2830A P:57.157W PF:0.9276 Freq:49.99Hz Lamp Flux:3821.96x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

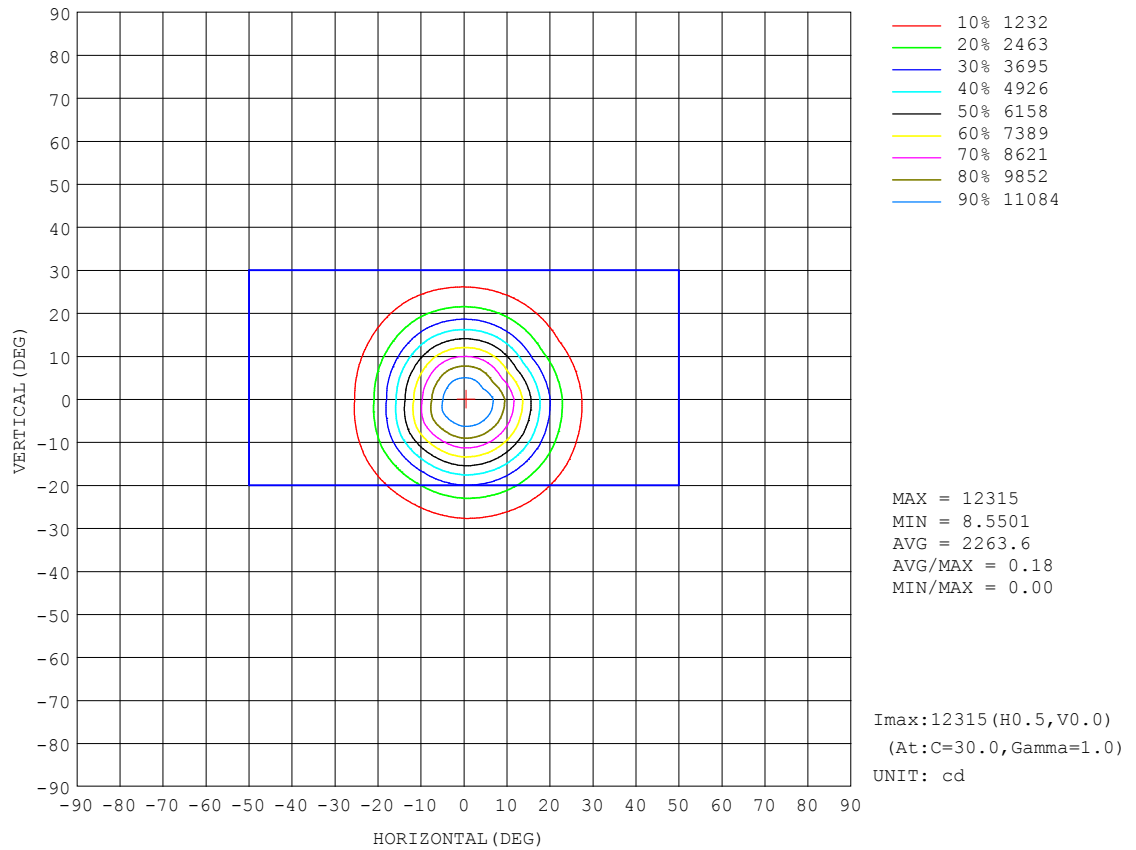


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

AAI Figure

Test:U:217.70V I:0.2830A P:57.157W PF:0.9276 Freq:49.99Hz Lamp Flux:3821.96x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

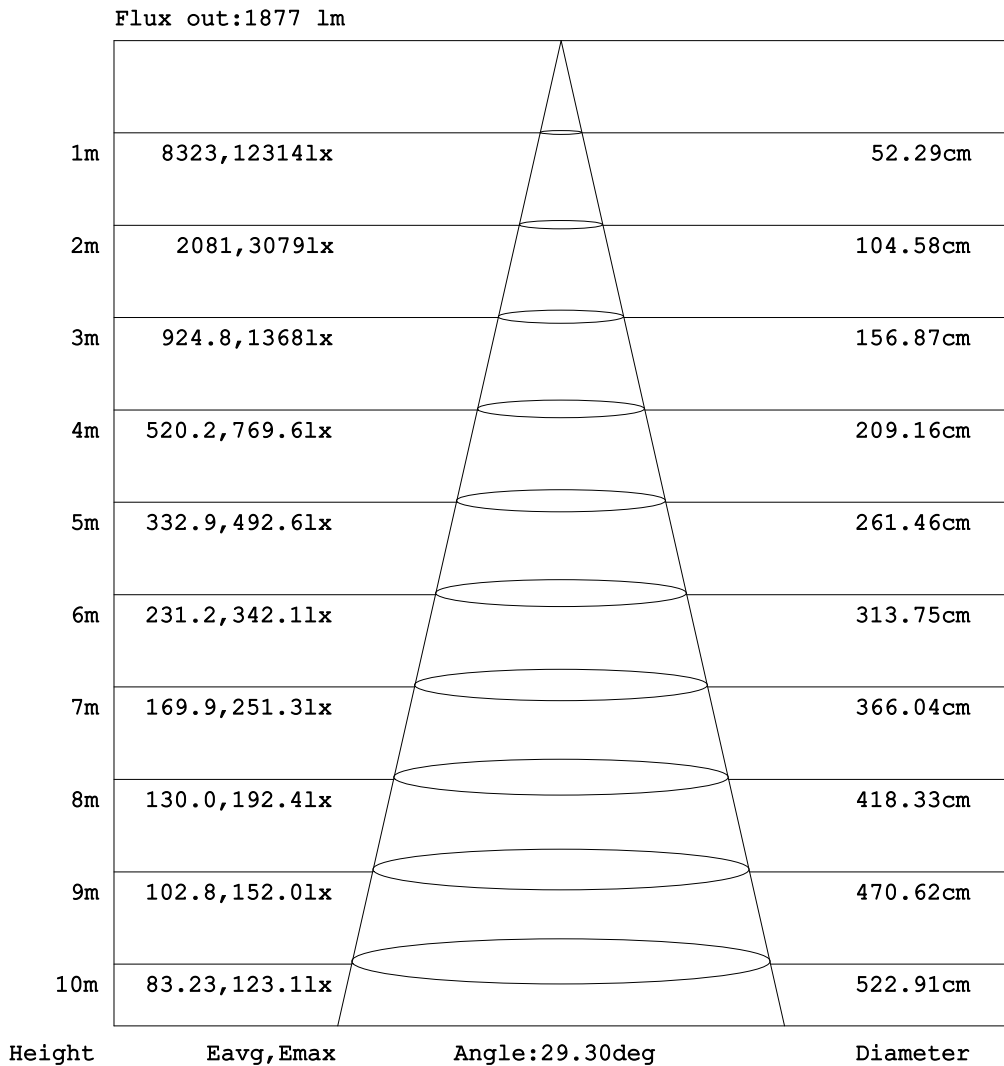


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:217.70V I:0.2830A P:57.157W PF:0.9276 Freq:49.99Hz Lamp Flux:3821.96x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

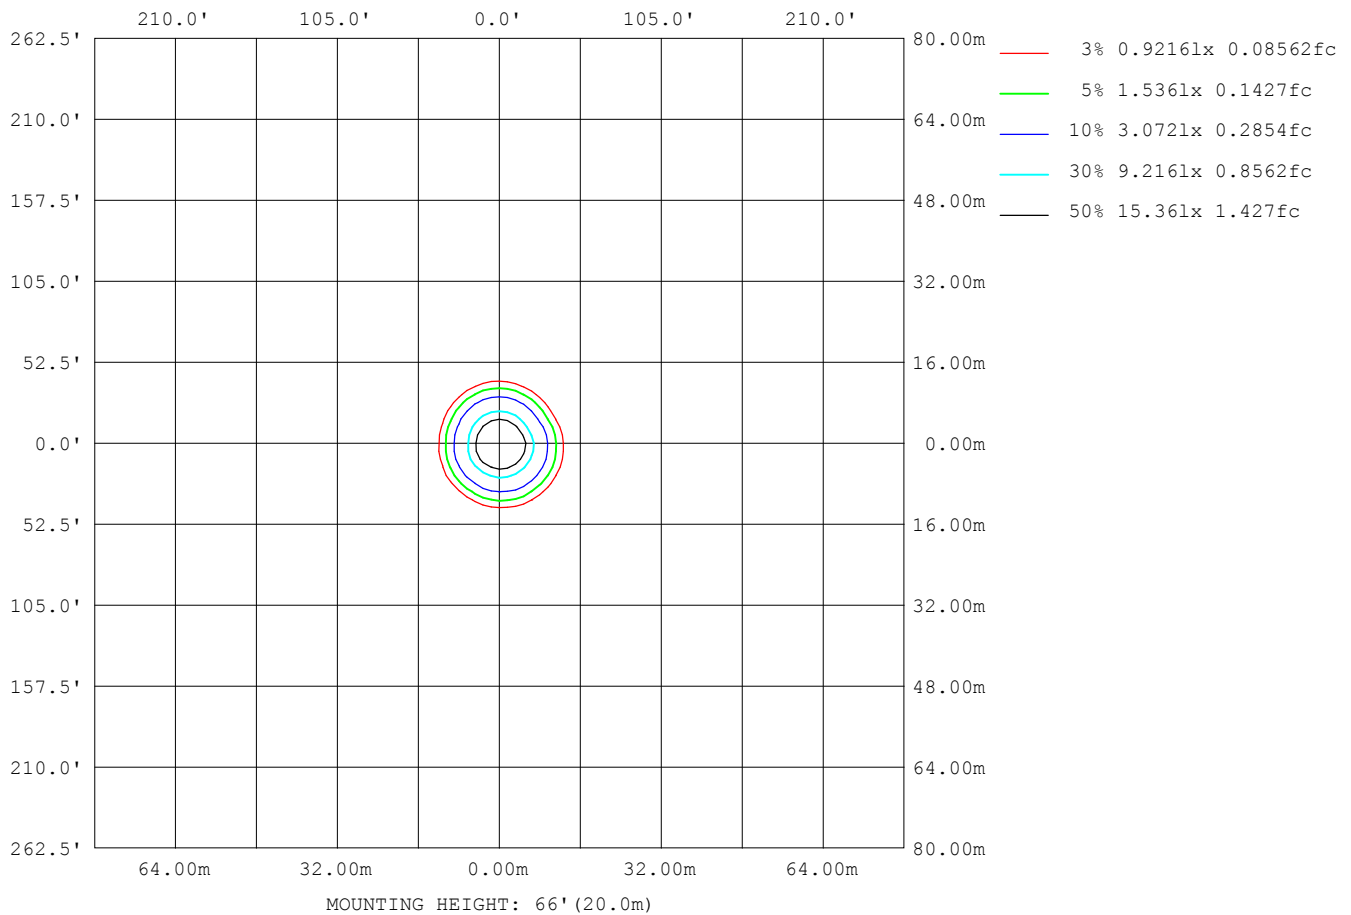

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:217.70V I:0.2830A P:57.157W PF:0.9276 Freq:49.99Hz Lamp Flux:3821.96x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	8
L_0~180 (75) av	8
L_0~180 (85) av	18
L_90~270 (65) av	8
L_90~270 (75) av	8
L_90~270 (85) av	19
L_45 (65) av	14
L_45 (75) av	8
L_45 (85) av	20

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:2026-04-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:4.234m [K=1.0000]
 Remarks:

Planar Illuminance Curve

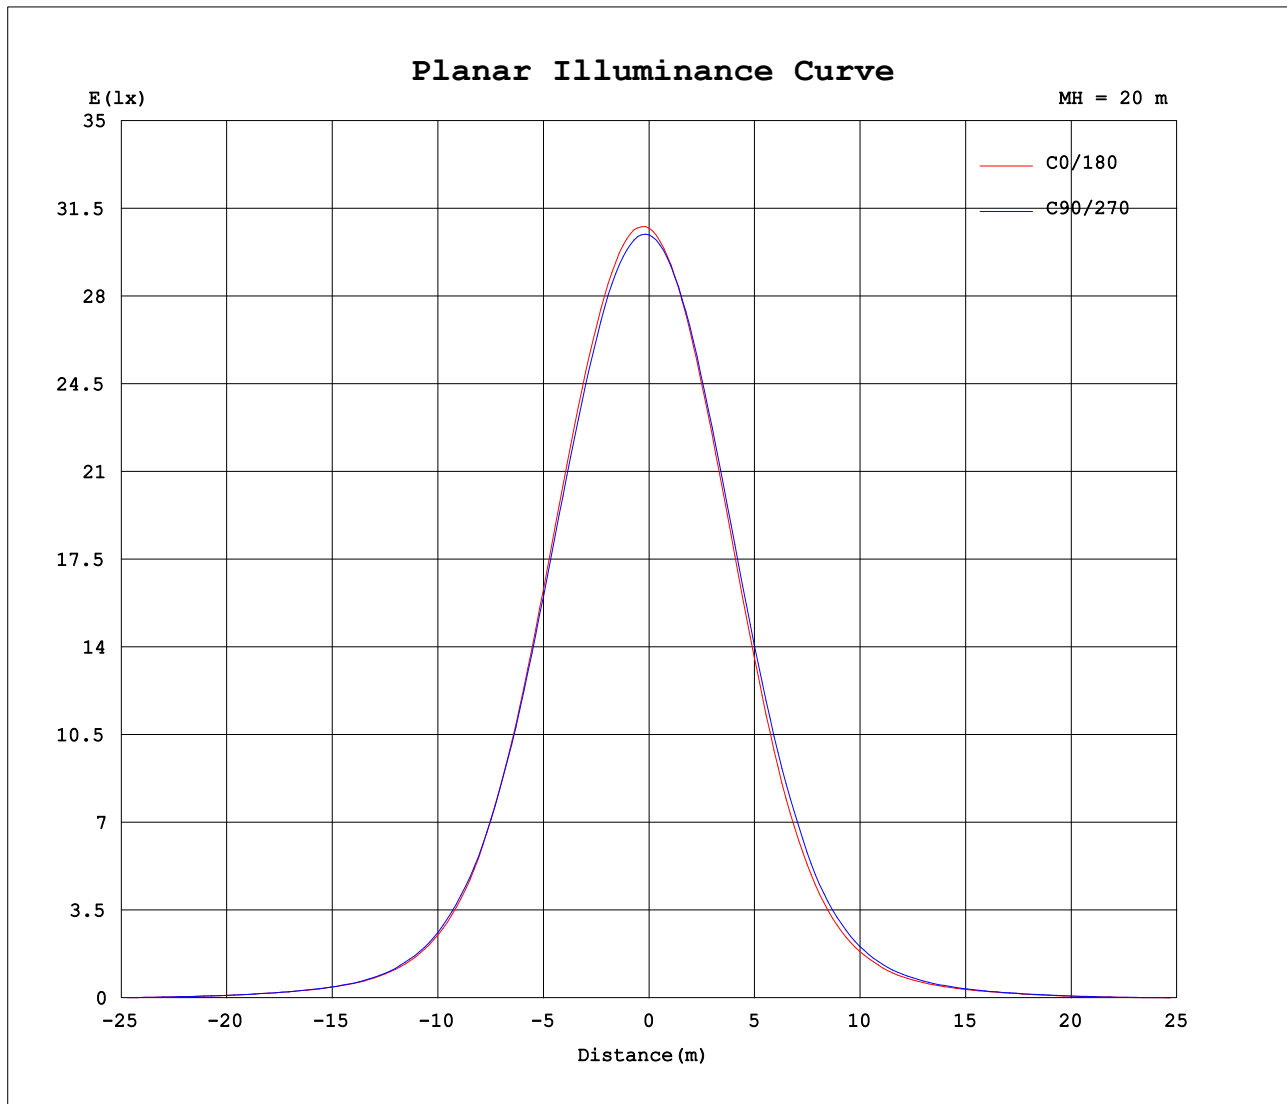

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators:
 Test Date: 2026-04-27

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 4.234m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:217.70V I:0.2830A P:57.157W PF:0.9276 Freq:49.99Hz Lamp Flux:3821.96x1 lm		
NAME:	TYPE:COB	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1219	1219	1219	1219	1219	1219	1219	1219	1219	1219	1219	1219						
5	1162	1168	1161	1154	1144	1141	1095	1093	1104	1109	1116	1115						
10	949	961	949	937	916	912	836	832	853	859	873	869						
15	649	666	658	645	615	609	532	535	555	560	570	562						
20	368	391	384	370	343	331	279	284	304	306	305	301						
25	177	194	194	186	164	156	130	136	147	146	144	139						
30	83.1	93.0	91.7	88.5	75.7	71.9	61.2	64.7	70.2	69.1	67.9	65.1						
35	42.2	46.0	46.4	43.6	39.1	37.1	32.8	34.4	36.7	36.3	35.4	34.6						
40	24.1	26.1	26.0	24.4	22.5	21.8	18.8	20.2	21.3	20.3	20.9	20.4						
45	12.7	15.8	15.7	12.6	13.7	13.4	8.77	12.2	12.4	9.63	12.7	12.1						
50	4.35	8.16	8.12	4.34	6.81	6.73	2.55	5.70	5.49	2.97	6.17	5.34						
55	0.87	2.69	2.91	0.86	2.09	2.19	0.53	1.59	1.44	0.58	1.88	1.37						
60	0.18	0.53	0.56	0.18	0.43	0.46	0.08	0.29	0.26	0.08	0.38	0.30						
65	0.04	0.08	0.08	0.04	0.06	0.06	0.03	0.04	0.04	0.03	0.05	0.04						
70	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.03	0.02	0.02						
75	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02						
80	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02						
85	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02						
90	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02						
95	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03						
100	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04						
105	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.06						
110	0.12	0.13	0.13	0.14	0.14	0.13	0.12	0.13	0.12	0.12	0.11	0.10						
115	0.23	0.24	0.25	0.26	0.26	0.26	0.23	0.24	0.23	0.22	0.20	0.19						
120	0.43	0.44	0.46	0.47	0.48	0.47	0.42	0.43	0.42	0.40	0.37	0.36						
125	0.75	0.75	0.77	0.79	0.81	0.80	0.73	0.74	0.72	0.69	0.65	0.64						
130	1.16	1.15	1.18	1.21	1.23	1.23	1.13	1.14	1.11	1.09	1.04	1.03						
135	1.62	1.61	1.63	1.66	1.69	1.69	1.59	1.59	1.56	1.54	1.49	1.49						
140	2.06	2.05	2.06	2.09	2.11	2.12	2.03	2.02	1.99	1.97	1.94	1.94						
145	2.42	2.40	2.40	2.42	2.43	2.44	2.37	2.33	2.32	2.32	2.30	2.31						
150	2.62	2.60	2.60	2.61	2.61	2.60	2.53	2.49	2.48	2.51	2.52	2.53						
155	2.66	2.65	2.65	2.66	2.63	2.59	2.51	2.45	2.47	2.52	2.55	2.56						
160	2.52	2.52	2.53	2.55	2.49	2.41	2.30	2.26	2.29	2.36	2.42	2.42						
165	2.25	2.27	2.26	2.26	2.18	2.13	2.00	1.95	2.01	2.08	2.14	2.13						
170	1.92	1.94	1.91	1.88	1.81	1.79	1.66	1.64	1.64	1.70	1.76	1.77						
175	1.60	1.63	1.66	1.57	1.55	1.54	1.44	1.45	1.44	1.43	1.51	1.51						
180	1.44	1.48	1.47	1.41	1.44	1.46	1.45	1.48	1.47	1.41	1.44	1.46						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-04-27

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: