


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:217.75V I:0.0454A P:5.9155W PF:0.5977 Freq:49.99Hz Lamp Flux:391.167x1 lm		
NAME: COB	TYPE:V6H1000	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 66.13 lm/W			
MODEL	SG-S36QT	I _{max} (cd)	1012	S/MH (C0/180)	0.56
NOMINAL POWER(W)	6	LOR(%)	100.0	S/MH (C90/270)	0.48
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	391.17	η UP,DN(C0-180)	0.7,59.0
NOMINAL FLUX(lm)	391.167	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.7,39.6
LAMPS INSIDE	1	η up (%)	1.5	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	220	η down (%)	98.5	CIBSE SHR MAX	0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

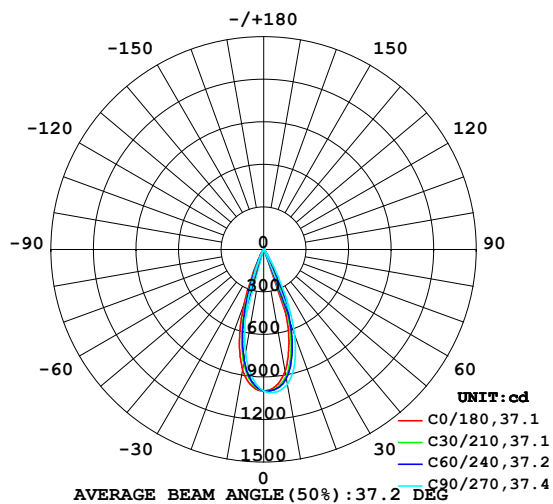

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

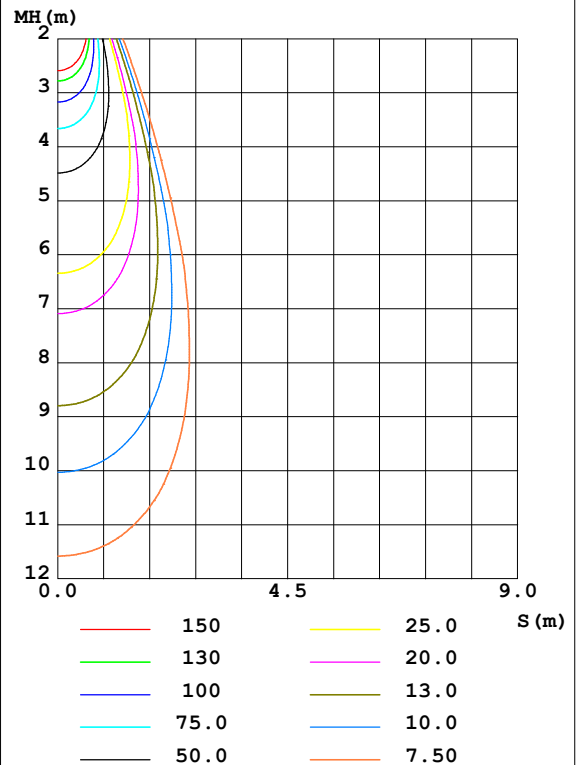

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-03-26

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	872.3	915.2	965.3	935.1	862.1	803.7	739.9	784.9	0- 10	88.78	88.78	22.7,22.7
20	441.1	527.9	638.0	557.6	399.2	313.9	233.0	296.6	10- 20	181.1	269.8	69,69
30	77.15	100.8	145.4	103.4	58.10	41.99	32.52	44.44	20- 30	94.98	364.8	93.3,93.3
40	6.533	11.78	18.78	11.10	3.397	1.975	1.353	1.898	30- 40	18.77	383.6	98.1,98.1
50	0.6413	0.8096	0.9696	0.6773	0.4715	0.3925	0.2569	0.3751	40- 50	1.555	385.1	98.5,98.5
60	0.0620	0.1059	0.1406	0.1055	0.0442	0.0393	0.0333	0.0345	50- 60	0.2297	385.4	98.5,98.5
70	0.0240	0.0229	0.0282	0.0269	0.0190	0.0184	0.0166	0.0154	60- 70	0.0366	385.4	98.5,98.5
80	0.0101	0.0089	0.0077	0.0127	0.0076	0.0089	0.0090	0.0083	70- 80	0.0155	385.4	98.5,98.5
90	0.0063	0.0057	0.0077	0.0064	0.0076	0.0076	0.0090	0.0077	80- 90	0.0085	385.4	98.5,98.5
100	0.0063	0.0063	0.0077	0.0064	0.0089	0.0095	0.0077	0.0090	90-100	0.0078	385.4	98.5,98.5
110	0.0590	0.0430	0.0295	0.0390	0.0481	0.0583	0.0767	0.0550	100-110	0.0212	385.5	98.5,98.5
120	0.4084	0.3266	0.2463	0.3087	0.3226	0.4003	0.5028	0.4053	110-120	0.1636	385.6	98.6,98.6
130	1.247	1.107	0.9488	1.065	1.086	1.231	1.404	1.245	120-130	0.6469	386.3	98.8,98.8
140	2.255	2.122	1.970	2.076	2.097	2.226	2.397	2.250	130-140	1.284	387.6	99.1,99.1
150	2.864	2.823	2.797	2.800	2.735	2.732	2.813	2.793	140-150	1.590	389.2	99.5,99.5
160	2.536	2.672	2.847	2.696	2.356	2.295	2.283	2.407	150-160	1.265	390.4	99.8,99.8
170	1.727	1.889	2.036	1.889	1.568	1.408	1.307	1.498	160-170	0.6127	391.0	100,100
180	1.192	1.220	1.240	1.261	1.194	1.216	1.235	1.259	170-180	0.1371	391.2	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-03-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:217.75V I:0.0454A P:5.9155W PF:0.5977 Freq:49.99Hz Lamp Flux:391.167x1 lm		
NAME: COB	TYPE:V6H1000	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

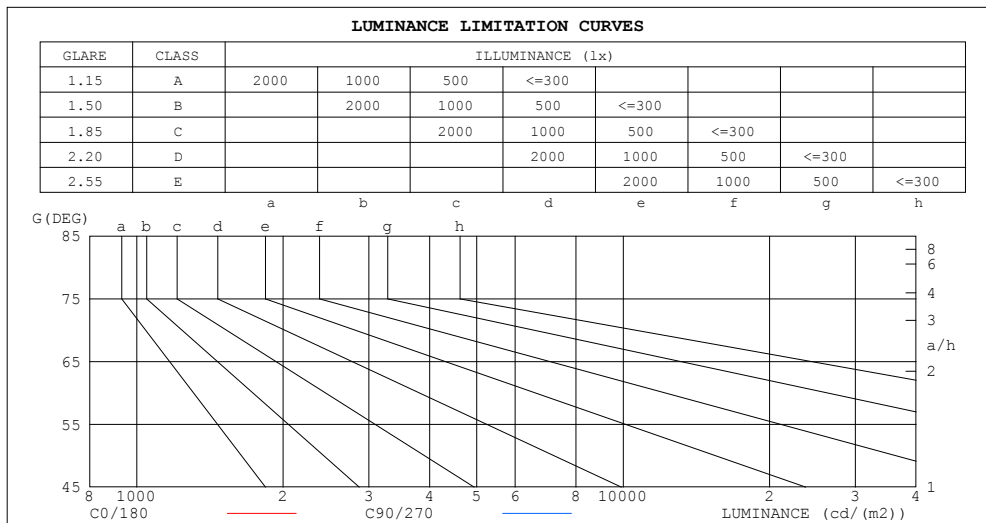

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1	1
80	1	0
75	1	1
70	1	1
65	1	1
60	1	3
55	4	8
50	10	15
45	20	36


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-03-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:217.75V I:0.0454A P:5.9155W PF:0.5977 Freq:49.99Hz Lamp Flux:391.167x1 lm		
NAME: COB	TYPE:V6H1000	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.05	1.04	1.03	1.02	1.00	.99	.98	.97	.96	.95
2.0	1.06	1.03	1.00	1.04	1.01	.99	1.01	.99	.97	.98	.96	.94	.95	.93	.92	.91
3.0	1.01	.97	.94	.99	.96	.93	.97	.94	.91	.94	.92	.90	.92	.90	.88	.87
4.0	.96	.92	.89	.95	.91	.88	.93	.90	.87	.91	.88	.86	.89	.87	.85	.83
5.0	.92	.88	.84	.91	.87	.84	.89	.86	.83	.88	.85	.82	.86	.83	.81	.80
6.0	.88	.84	.80	.87	.83	.80	.86	.82	.79	.85	.81	.79	.83	.80	.78	.77
7.0	.85	.80	.77	.84	.80	.77	.83	.79	.76	.82	.78	.76	.80	.77	.75	.74
8.0	.82	.77	.74	.81	.77	.74	.80	.76	.73	.79	.75	.73	.78	.75	.72	.71
9.0	.79	.74	.71	.78	.74	.71	.77	.73	.70	.76	.73	.70	.75	.72	.70	.69
10.0	.76	.71	.68	.75	.71	.68	.74	.71	.68	.74	.70	.68	.73	.70	.67	.66

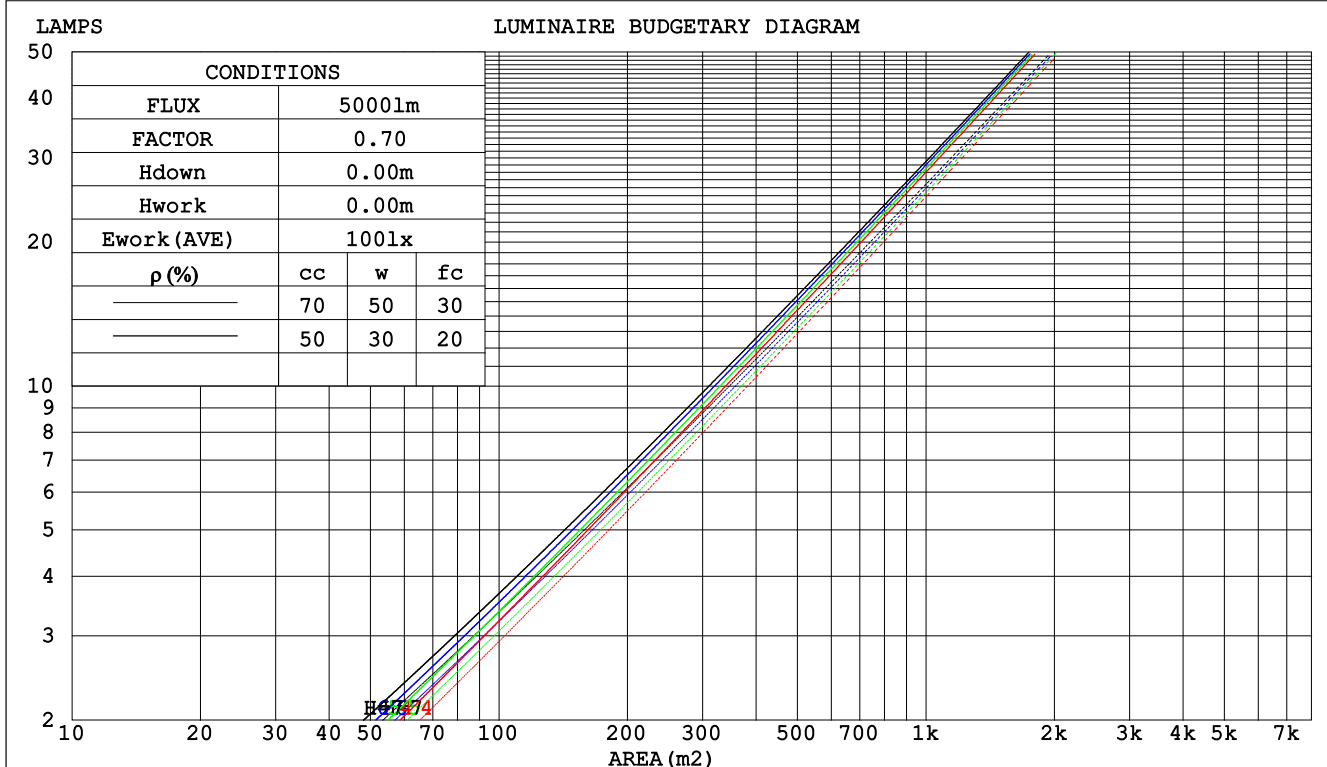

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:2026-03-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:4.234m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:217.75V I:0.0454A P:5.9155W PF:0.5977 Freq:49.99Hz Lamp Flux:391.167x1 lm					
NAME: COB			TYPE:V6H1000		WEIGHT:
SPEC.:3000K			DIM.: 6mm		SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.148	.084	.027	.141	.080	.025	.127	.073	.023	.115	.066	.021	.104	.060	.019	
2.0	.138	.076	.023	.132	.073	.022	.121	.067	.021	.111	.062	.019	.101	.057	.018	
3.0	.129	.069	.021	.124	.067	.020	.115	.062	.019	.106	.058	.018	.098	.054	.017	
4.0	.122	.063	.019	.118	.062	.018	.110	.058	.017	.102	.055	.017	.095	.052	.016	
5.0	.116	.059	.017	.112	.058	.017	.105	.055	.016	.099	.052	.015	.093	.049	.015	
6.0	.110	.055	.016	.107	.054	.016	.101	.052	.015	.095	.049	.015	.090	.047	.014	
7.0	.105	.052	.015	.102	.051	.015	.097	.049	.014	.092	.047	.014	.087	.045	.013	
8.0	.100	.049	.014	.098	.048	.014	.093	.047	.013	.089	.045	.013	.085	.043	.013	
9.0	.096	.047	.013	.094	.046	.013	.090	.044	.013	.086	.043	.012	.082	.042	.012	
10.0	.093	.044	.012	.091	.044	.012	.087	.043	.012	.083	.041	.012	.080	.040	.012	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.202	.202	.202	.172	.172	.172	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.180	.169	.158	.154	.145	.136	.106	.100	.094	.061	.058	.055	.019	.019	.018	
2.0	.163	.144	.128	.140	.124	.111	.096	.086	.077	.055	.050	.045	.018	.016	.015	
3.0	.149	.125	.106	.128	.108	.092	.088	.075	.064	.051	.044	.038	.016	.014	.012	
4.0	.137	.110	.089	.118	.095	.077	.081	.066	.054	.047	.039	.032	.015	.013	.011	
5.0	.127	.098	.076	.109	.084	.066	.075	.059	.047	.044	.035	.028	.014	.011	.009	
6.0	.119	.088	.066	.102	.076	.057	.070	.053	.040	.041	.031	.024	.013	.010	.008	
7.0	.112	.080	.058	.096	.069	.050	.066	.048	.036	.039	.029	.021	.012	.009	.007	
8.0	.105	.073	.051	.091	.064	.045	.063	.045	.032	.037	.026	.019	.012	.009	.006	
9.0	.100	.068	.046	.086	.059	.040	.060	.041	.028	.035	.024	.017	.011	.008	.006	
10.0	.095	.063	.042	.082	.055	.036	.057	.039	.026	.033	.023	.015	.011	.007	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-03-26

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:217.75V I:0.0454A P:5.9155W PF:0.5977 Freq:49.99Hz Lamp Flux:391.167x1 lm										
NAME: COB					TYPE:V6H1000			WEIGHT:		
SPEC.:3000K					DIM.: 6mm			SERIAL No.:		
MFR.: Hangzhou XRZLux Co.,Ltd					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	-0.7	-0.0	-0.5	0.2	0.3	1.6	2.3	1.8	2.5	2.6
3H	-0.9	-0.2	-0.6	-0.0	0.2	1.4	2.1	1.7	2.3	2.5
4H	-1.0	-0.3	-0.7	-0.1	0.1	1.3	2.0	1.6	2.2	2.4
6H	-1.1	-0.5	-0.8	-0.2	0.0	1.2	1.8	1.5	2.1	2.4
8H	-1.1	-0.5	-0.8	-0.3	0.0	1.2	1.8	1.5	2.0	2.3
12H	-1.2	-0.6	-0.8	-0.3	-0.0	1.1	1.7	1.5	2.0	2.3
4H 2H	-1.0	-0.3	-0.7	-0.1	0.1	1.3	2.0	1.6	2.2	2.4
3H	-1.2	-0.6	-0.8	-0.3	-0.0	1.1	1.7	1.5	2.0	2.3
4H	-1.3	-0.8	-0.9	-0.4	-0.1	1.0	1.5	1.4	1.9	2.2
6H	-1.4	-0.9	-1.0	-0.6	-0.2	0.9	1.4	1.3	1.7	2.1
8H	-1.4	-1.0	-1.0	-0.6	-0.2	0.9	1.3	1.3	1.7	2.1
12H	-1.5	-1.1	-1.0	-0.7	-0.3	0.8	1.2	1.3	1.6	2.0
8H 4H	-1.4	-1.0	-1.0	-0.6	-0.2	0.9	1.3	1.3	1.7	2.1
6H	-1.5	-1.2	-1.1	-0.8	-0.3	0.8	1.1	1.2	1.5	2.0
8H	-1.6	-1.3	-1.1	-0.9	-0.4	0.7	1.0	1.2	1.5	1.9
12H	-1.7	-1.4	-1.2	-0.9	-0.4	0.6	0.9	1.1	1.4	1.9
12H 4H	-1.5	-1.1	-1.0	-0.7	-0.3	0.8	1.2	1.3	1.6	2.0
6H	-1.6	-1.3	-1.1	-0.9	-0.4	0.7	1.0	1.2	1.5	1.9
8H	-1.7	-1.4	-1.2	-0.9	-0.4	0.6	0.9	1.1	1.4	1.9
Variations with the observer position at spacings:										
S = 1.0H	+ 3.8 / -22.3					+ 5.0 / -21.5				
1.5H	+ 6.5 / -15.0					+ 7.7 / -17.5				
2.0H	+ 5.6 / -11.9					+ 7.4 / -12.1				

CIE Pub.117, 391.2 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -3.3)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-03-26

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:217.75V I:0.0454A P:5.9155W PF:0.5977 Freq:49.99Hz Lamp Flux:391.167x1 lm		
NAME: COB	TYPE:V6H1000	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	90	85	81	90	85	81	89	84	81	78
0.80	97	92	89	97	92	89	95	91	88	85
1.00	101	96	93	100	96	92	99	95	92	88
1.25	105	100	97	104	99	96	101	98	95	91
1.50	107	103	100	106	102	99	103	100	98	94
2.00	109	105	103	108	104	102	105	102	100	95
2.50	111	107	105	109	106	104	106	103	102	95
3.00	112	109	107	110	108	105	107	105	103	96
4.00	114	112	110	112	110	108	108	106	105	98
5.00	115	113	112	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-03-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:217.75V I:0.0454A P:5.9155W PF:0.5977 Freq:49.99Hz Lamp Flux:391.167x1 lm		
NAME: COB	TYPE:V6H1000	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

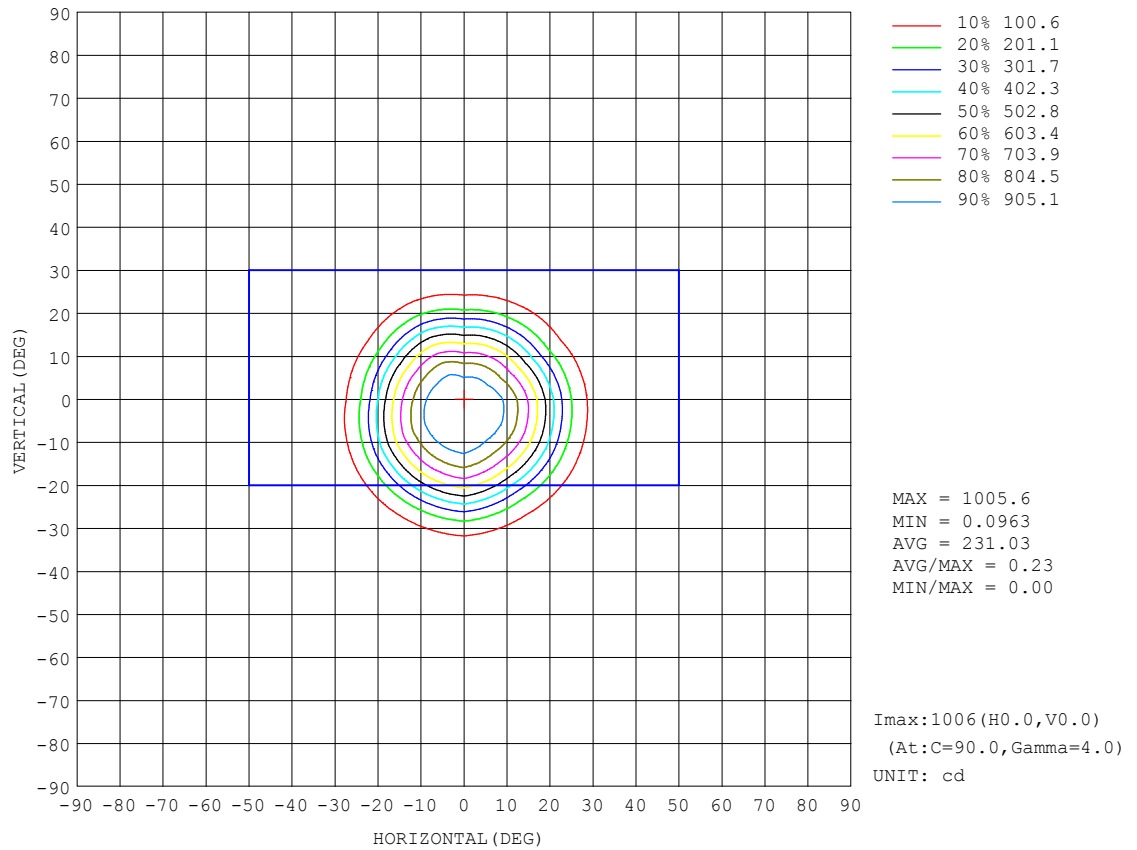


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-03-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

AAI Figure

Test:U:217.75V I:0.0454A P:5.9155W PF:0.5977 Freq:49.99Hz Lamp Flux:391.167x1 lm		
NAME: COB	TYPE:V6H1000	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

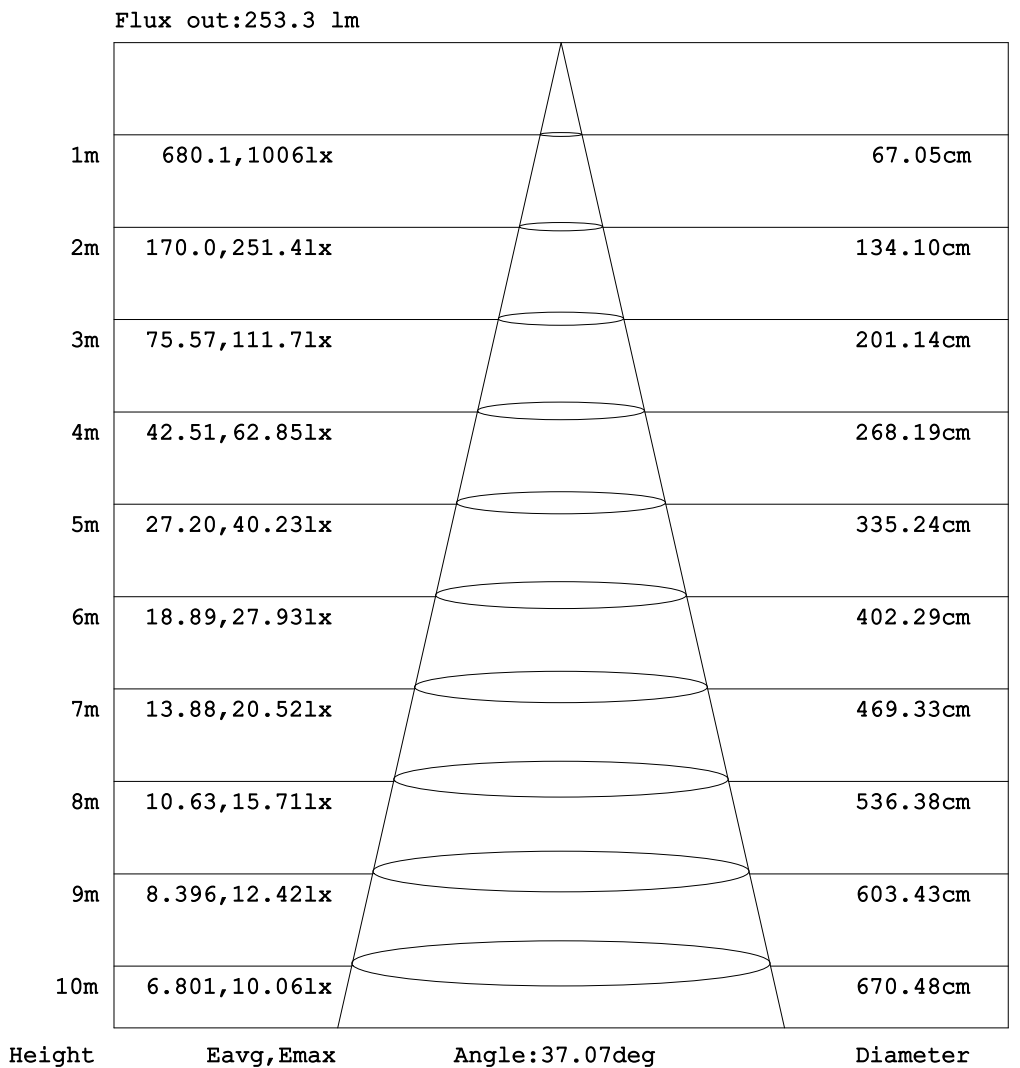


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators:
Test Date: 2026-03-26

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity: 65.0%
Test Distance: 4.234m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:217.75V I:0.0454A P:5.9155W PF:0.5977 Freq:49.99Hz Lamp Flux:391.167x1 lm		
NAME: COB	TYPE:V6H1000	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

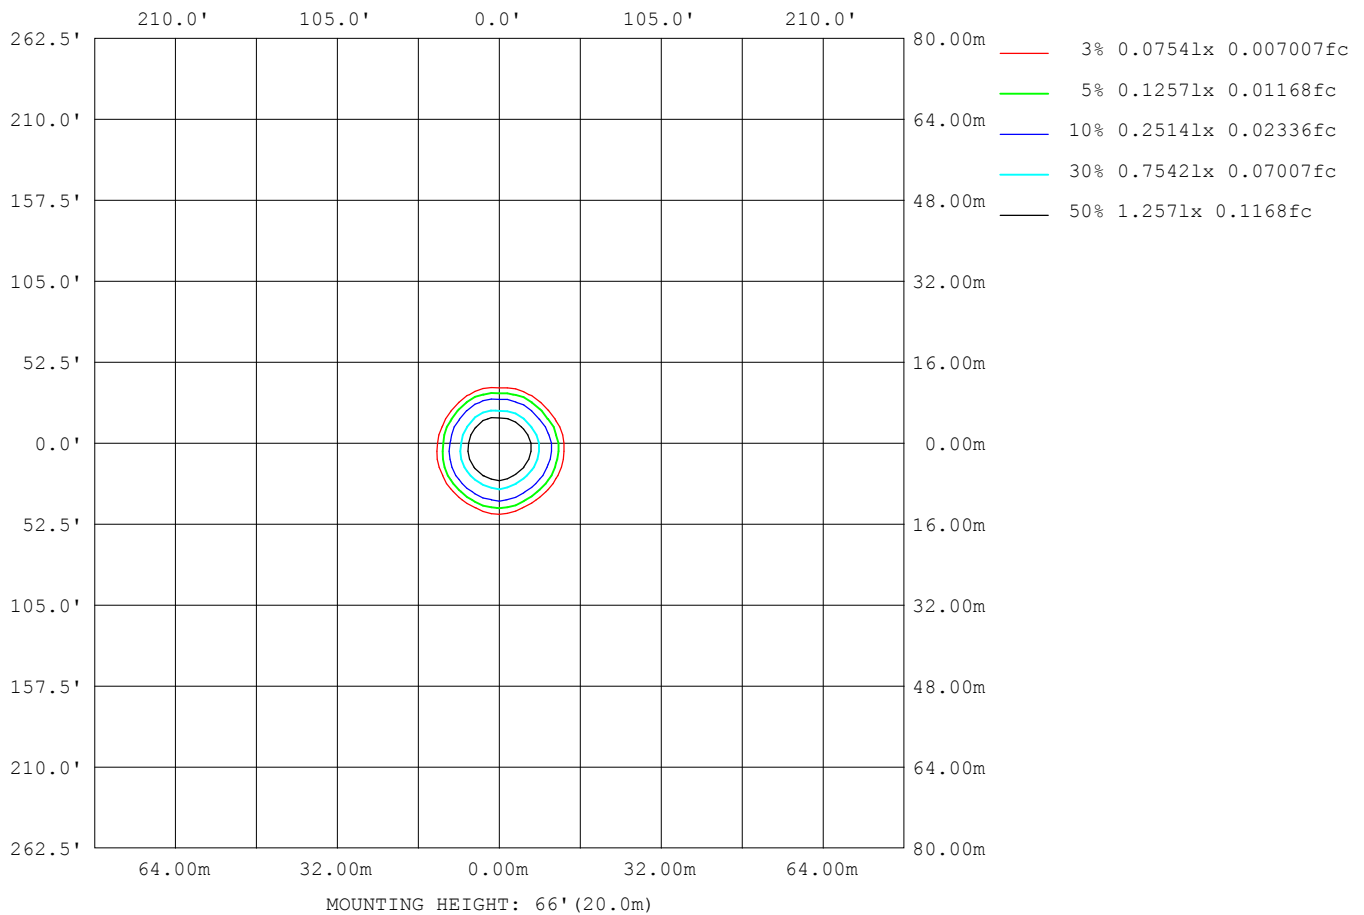

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-03-26

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:217.75V I:0.0454A P:5.9155W PF:0.5977 Freq:49.99Hz Lamp Flux:391.167x1 lm		
NAME: COB	TYPE:V6H1000	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1
L_0~180 (75) av	0
L_0~180 (85) av	1
L_90~270 (65) av	1
L_90~270 (75) av	1
L_90~270 (85) av	1
L_45 (65) av	1
L_45 (75) av	1
L_45 (85) av	1

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-03-26

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks:

Planar Illuminance Curve

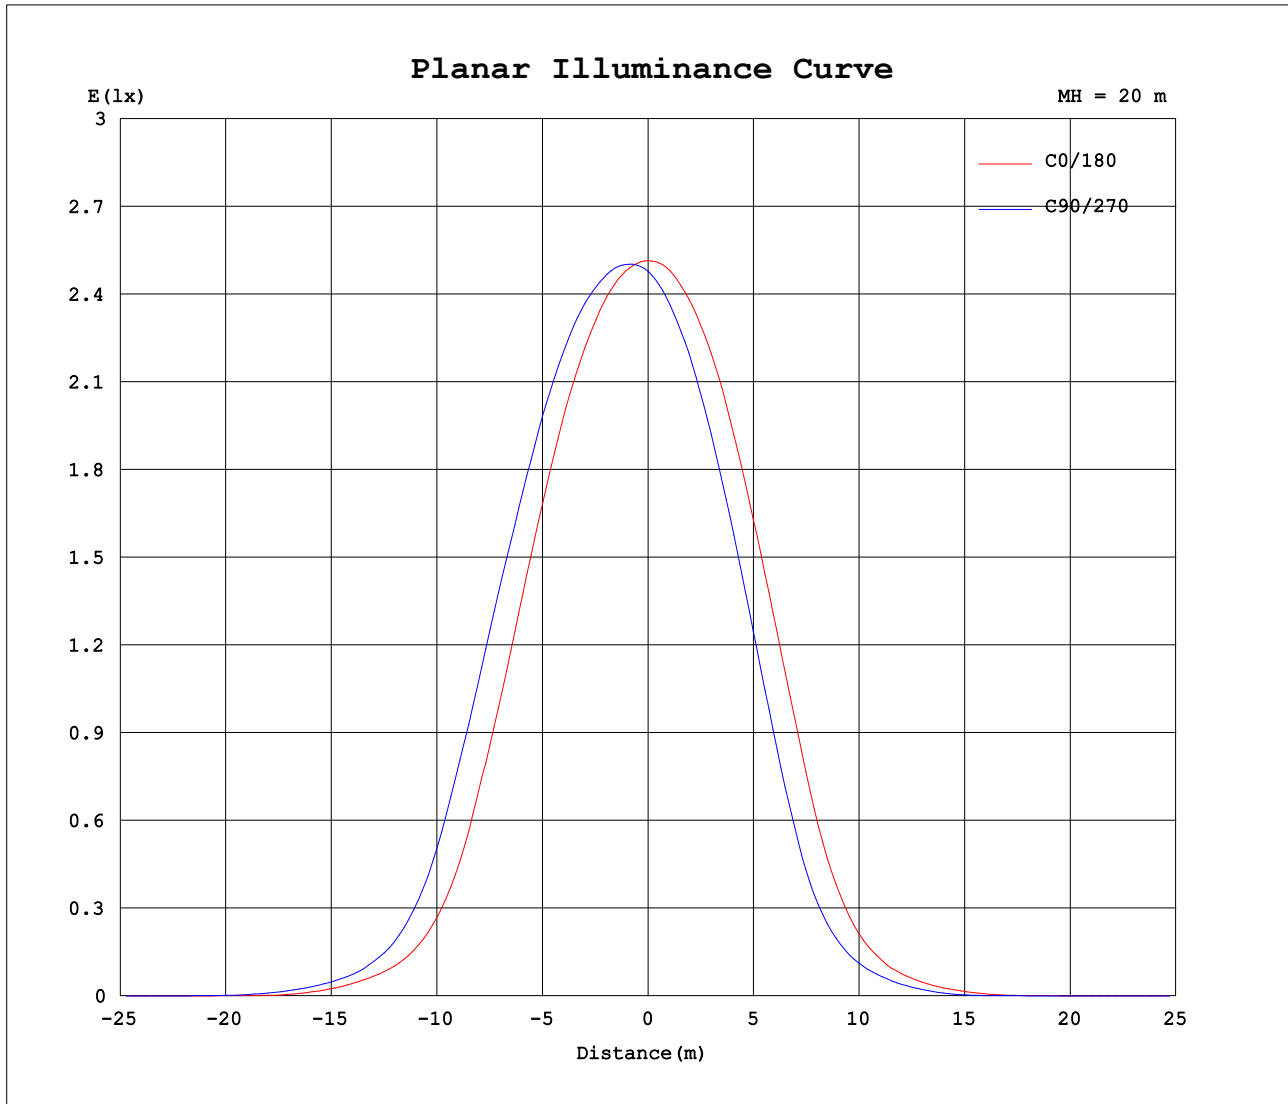

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators:
 Test Date: 2026-03-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 4.234m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:217.75V I:0.0454A P:5.9155W PF:0.5977 Freq:49.99Hz Lamp Flux:391.167x1 lm		
NAME: COB	TYPE:V6H1000	WEIGHT:
SPEC.:3000K	DIM.: 6mm	SERIAL No.:
MFR.: Hangzhou XRZLux Co.,Ltd	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	997	997	997	997	997	997	997	997	997	997	997	997							
5	969	984	989	1010	1002	993	966	947	938	911	925	939							
10	872	908	923	965	946	924	862	814	794	740	768	802							
15	690	747	773	841	807	764	664	598	572	497	536	584							
20	441	510	546	638	588	527	399	329	299	233	269	324							
25	200	251	279	370	314	251	163	122	111	85.4	102	127							
30	77.2	96.1	105	145	115	91.8	58.1	43.5	40.4	32.5	39.6	49.3							
35	31.1	38.7	41.1	54.1	42.3	32.9	20.3	14.2	12.3	7.63	11.3	16.5							
40	6.53	11.0	12.5	18.8	13.3	8.88	3.40	2.14	1.81	1.35	1.64	2.15							
45	1.38	1.79	1.89	2.56	1.78	1.42	1.00	0.79	0.74	0.62	0.69	0.86							
50	0.64	0.80	0.82	0.97	0.73	0.62	0.47	0.41	0.37	0.26	0.32	0.43							
55	0.24	0.38	0.41	0.48	0.38	0.29	0.15	0.11	0.09	0.06	0.08	0.12							
60	0.06	0.09	0.12	0.14	0.12	0.09	0.04	0.04	0.04	0.03	0.03	0.04							
65	0.03	0.04	0.05	0.05	0.05	0.04	0.03	0.03	0.02	0.02	0.02	0.03							
70	0.02	0.02	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.01	0.02							
75	0.02	0.01	0.02	0.02	0.02	0.02	0.01	0.02	0.01	0.01	0.01	0.01							
80	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01							
85	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01							
90	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01							
95	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01							
100	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01							
105	0.02	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02							
110	0.06	0.04	0.04	0.03	0.03	0.05	0.05	0.05	0.06	0.08	0.07	0.04							
115	0.17	0.13	0.12	0.09	0.10	0.14	0.13	0.16	0.18	0.22	0.18	0.14							
120	0.41	0.34	0.31	0.25	0.28	0.34	0.32	0.39	0.41	0.50	0.44	0.37							
125	0.78	0.69	0.64	0.54	0.59	0.67	0.65	0.75	0.78	0.91	0.82	0.73							
130	1.25	1.13	1.08	0.95	1.02	1.11	1.09	1.21	1.25	1.40	1.30	1.19							
135	1.76	1.64	1.59	1.45	1.52	1.62	1.59	1.72	1.76	1.92	1.82	1.71							
140	2.26	2.15	2.10	1.97	2.03	2.12	2.10	2.20	2.25	2.40	2.30	2.20							
145	2.65	2.58	2.53	2.44	2.49	2.55	2.51	2.56	2.61	2.72	2.66	2.60							
150	2.86	2.83	2.81	2.80	2.80	2.81	2.73	2.72	2.75	2.81	2.80	2.78							
155	2.82	2.84	2.88	2.94	2.90	2.82	2.66	2.60	2.62	2.64	2.69	2.72							
160	2.54	2.62	2.72	2.85	2.77	2.62	2.36	2.28	2.31	2.28	2.39	2.42							
165	2.13	2.28	2.36	2.53	2.43	2.27	1.97	1.85	1.90	1.85	1.96	2.02							
170	1.73	1.88	1.90	2.04	1.93	1.85	1.57	1.45	1.37	1.31	1.43	1.57							
175	1.34	1.45	1.53	1.57	1.51	1.46	1.24	1.17	1.11	1.04	1.17	1.24							
180	1.19	1.21	1.23	1.24	1.25	1.28	1.19	1.20	1.23	1.23	1.25	1.27							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:2026-03-26

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:4.234m [K=1.0000]
Remarks: