

GK75-R01QS



GK75-R01QT



GK75-S01QS



GK75-S01QT



P.GEEK 3"

GK - - - - -

XRZLux GEEK	SHAPE	VERSION	TRIM	FRAME FINISH	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	HOUSING
GK75	R Round	01	QS Microflange	B Black	B Black	B Bridgelux	90 90+ CRI 15 Watts Lumens Divd.-1485	27 2700K 30 3000K 35 3500K 40 4000K	50 50° 35 35°	CMEM55 On/Off; Triac PhaseDim; 0-10V Dim 120VAC KIG On/Off; Triac Phase Dim; 0-10V Dim 120/277VAC *Remote Placed	NCP-SR3-R21 Rough-in Plate with Hanging Bars NCBX-SR3-R21 IC Box with Hanging Bars BRKT-2SR75A Rough-in Plate for Dual Lights *For more details,pls refer to page 3
	S Square		QT Trimless Drywall	W White	W White G Gold		97 97+ CRI 15 Watts Lumens Divd.-1080		50 50° 35 35° 25 25°		
							Dim To Warm 90 90+ CRI 15 Watts Lumens Divd.-973	1830 1800-3000K	50 50° 35 35°		
							90 90+ CRI 15 Watts Lumens Divd.-1150 *External 5CCT Selector TUNABLE WHITE 90 90+ CRI 15 Watts Lumens Divd.-1150	2765A 2700K 3000K 4000K 5000K 6500K 2765 2700-6500K	50 50° 35 35° 25 25°		

Order Code Example: GK75-R01QS-W-W-B-90-35-50

Accessories




SF
Soft Lens




HC
Honeycomb Louver

Photometry


Beam angle: 50°
Delivered Lumens: 1485 lumens
CCT: 4000K
CRI: 90
Power: 15W
Efficacy: 99lm/W

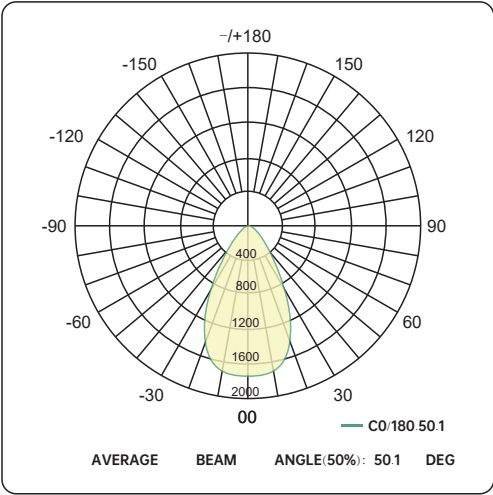

Beam angle: 35°
Delivered Lumens: 1380 lumens
CCT: 4000K
CRI: 90
Power: 15W
Efficacy: 92lm/W

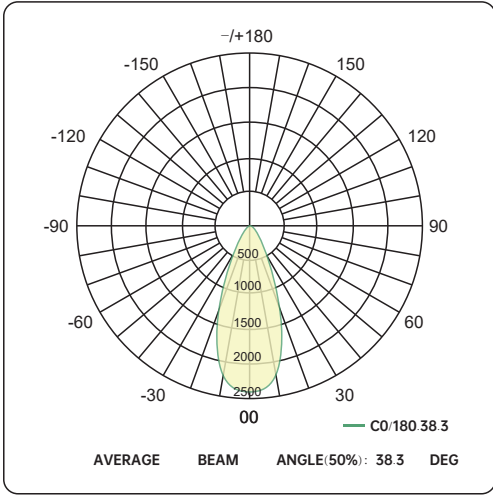


Beam angle: 25°
Delivered Lumens: 945 lumens
CCT: 4000K
CRI: 97
Power: 15W
Efficacy: 63lm/W

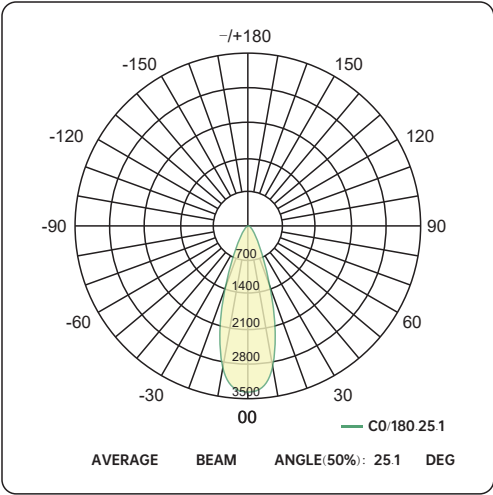

HOUSING

Rough-in Plate for New-Construction (with Hanging Bars)

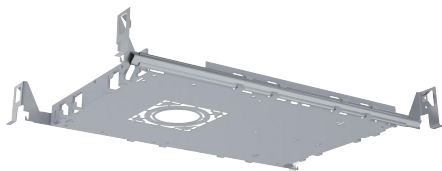


NCP-SR3-R21

For P.GEEK trim&trimless


Cut out:

Round: $\varnothing 3"$ ($\varnothing 77\text{mm}$)
 $\varnothing 2"$ ($\varnothing 62\text{mm}$)
 $\varnothing 1"$ ($\varnothing 50\text{mm}$)

Square: $\square 3"$ ($\square 77\text{mm}$)

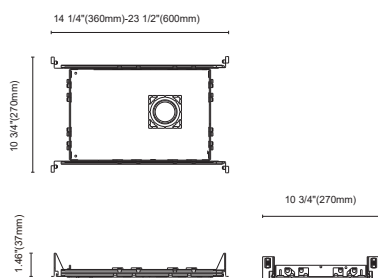

IC-BOX for New-Construction(with Hanging Bars)

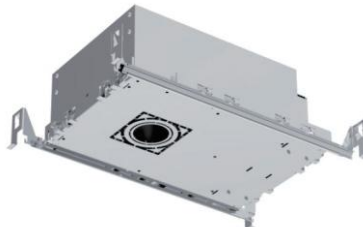


NCBX-SR3-R21

For P.GEEK trim&trimless


Cut out:

Round: $\varnothing 3"$ ($\varnothing 77\text{mm}$)
 $\varnothing 2"$ ($\varnothing 62\text{mm}$)
 $\varnothing 1"$ ($\varnothing 50\text{mm}$)


Square: $\square 3"$ ($\square 77\text{mm}$)

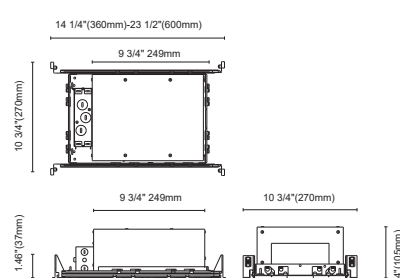

Cut out

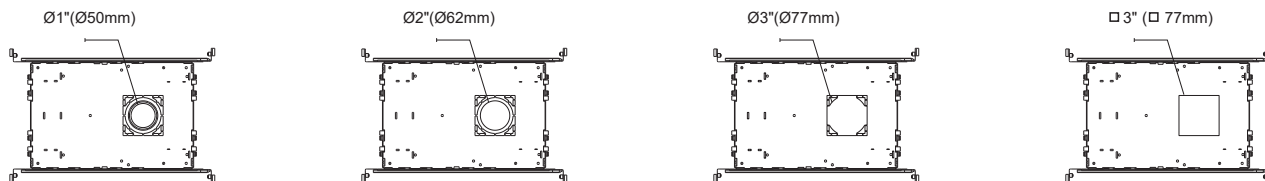

Rough-in Plate for New-Construction

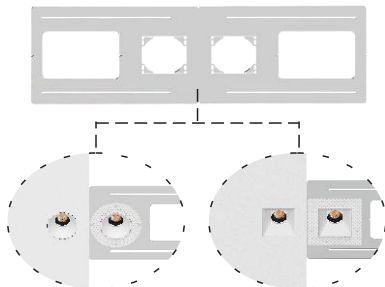


BRKT-2SR75A

For P.GEEK trim & trimless

Cut out:

Round: $\varnothing 77\text{mm} \times 2$ ($\varnothing 3" \times 2$)
 Square: $\square 77\text{mm} \times 2$ ($\square 3" \times 2$)

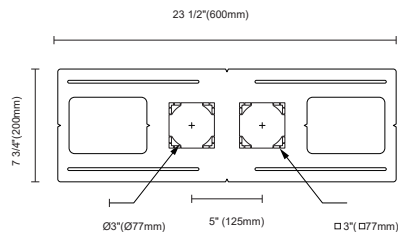



Remark

Tailored brackets are available with a reasonable surcharge, details as below

- The customized bracket's dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests



For more information, please get in touch with XRZLux sales.

GK75-R01QS

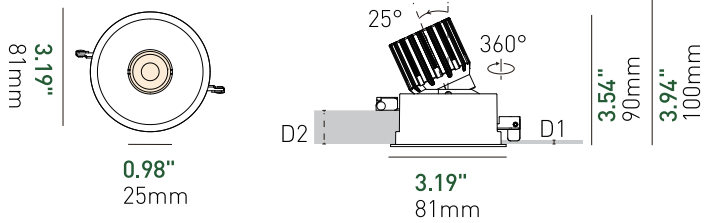
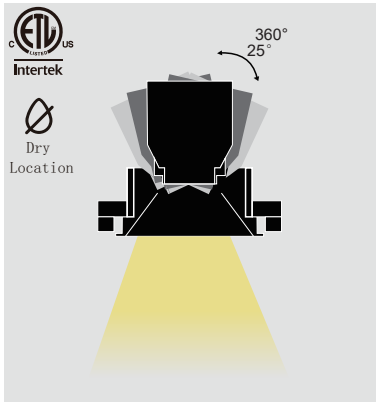


D1:min. **0.06"** (1.5mm)
D2:max.**0.94"** (24mm)

GK75-R01QT

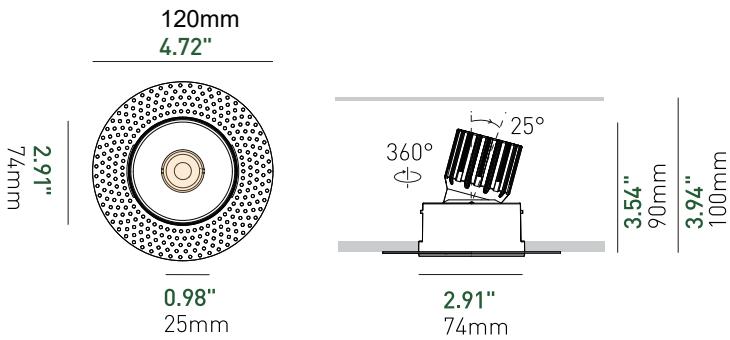
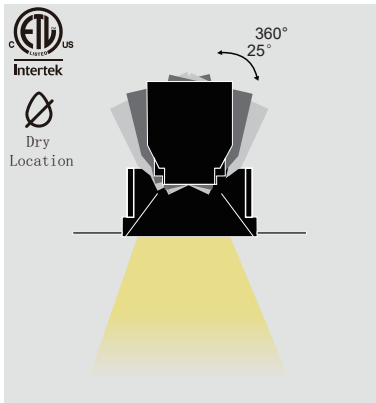


GK75-S01QS


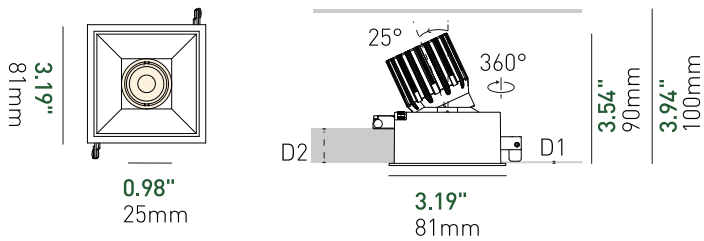
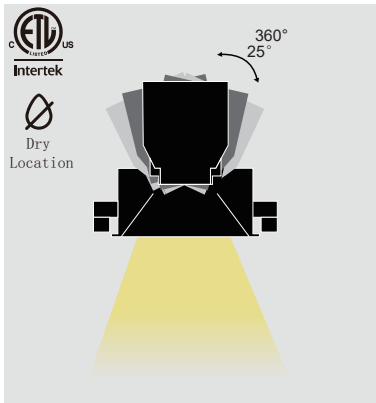


D1:min. **0.06"** (1.5mm)
D2:max.**0.94"** (24mm)

GK75-S01QT

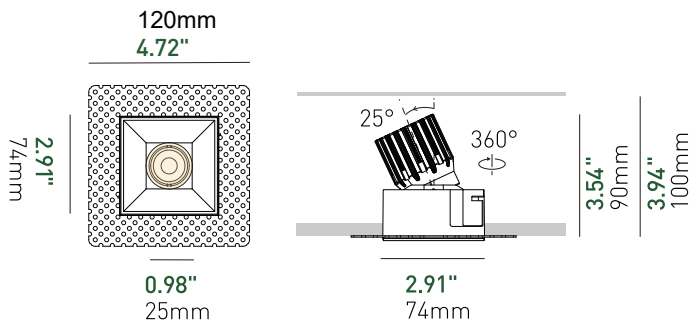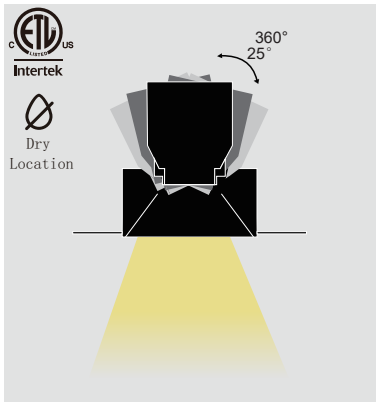

Microflange

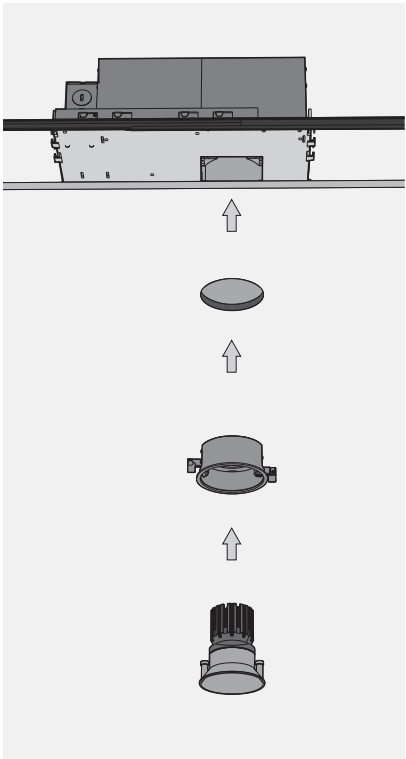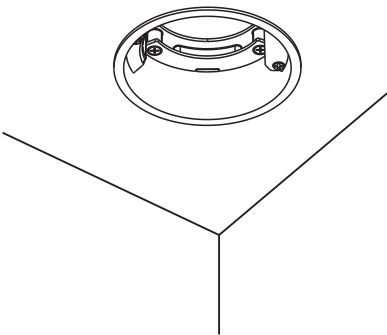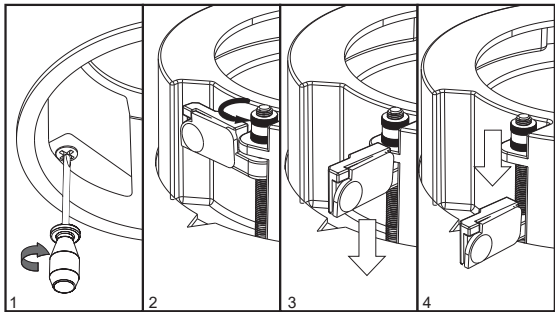

Trimless Drywall

