

GK75-S01QS2



GK75-S01QT2



P.GEEK 3"

GK - - - - -

XRZLux GEEK	SHAPE	VERSION	TRIM	FRAME FINISH	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	HOUSING
GK75	S Square	01	QS2 Microflange	B Black	B Black	B Bridgelux	90 90+ CRI 2*15 Watts Lumens Divd.-2970	27 2700K 30 3000K 35 3500K 40 4000K	50 50° 35 35°	CMEM55 On/Off; Triac PhaseDim; 0-10V Dim 120VAC KIG On/Off; Triac Phase Dim; 0-10V Dim 120/277VAC *Remote Placed	NCP-S36 Rough-in Plate with Hanging Bars NCBX-S36 IC Box with Hanging Bars BRKT-S36 Rough-in Plate *For more details,pls refer to page 3
			QT2 Trimless Drywall	W White	W White G Gold		97 97+ CRI 2*15 Watts Lumens Divd.-2160		50 50° 35 35° 25 25°		
							Dim To Warm 90 90+ CRI 2*15 Watts Lumens Divd.-1946	1830 1800-3000K	50 50° 35 35°		
							90 90+ CRI 2*15 Watts Lumens Divd.-2300 *External 5CCT Selector TUNABLE WHITE 90 90+ CRI 2*15 Watts Lumens Divd.-2300	2765A 2700K 3000K 4000K 5000K 6500K 2765 2700-6500K	50 50° 35 35° 25 25°		

Order Code Example: GK75-S01QS2-W-W-B-90-35-50

Accessories




SF
Soft Lens




HC
Honeycomb Louver

Photometry


Beam angle: 50°
Delivered Lumens: 2970 lumens
CCT: 4000K
CRI: 90
Power: 2*15W
Efficacy: 99lm/W

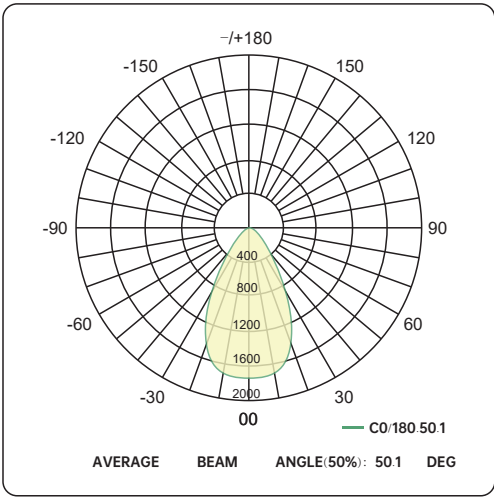

Beam angle: 35°
Delivered Lumens: 2760 lumens
CCT: 4000K
CRI: 90
Power: 2*15W
Efficacy: 92lm/W

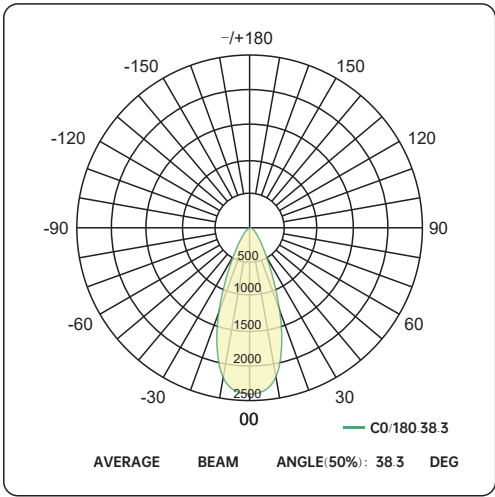

Beam angle: 25°
Delivered Lumens: 1890 lumens
CCT: 4000K
CRI: 97
Power: 2*15W
Efficacy: 63lm/W

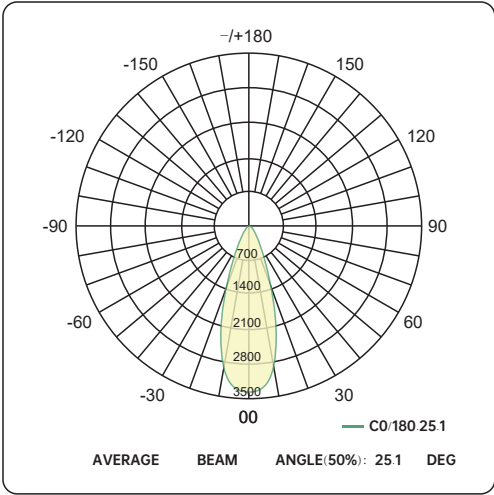

HOUSING

Rough-in Plate for New-Construction (with Hanging Bars)




NCP-S36


For P.GEEK trim&trimless

Cut out:

Square: □ 6"×3" (□ 150*77mm)

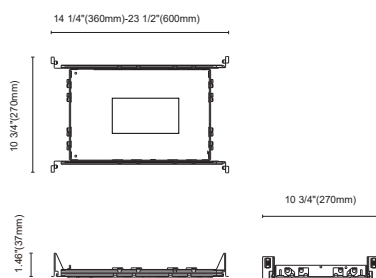

IC-BOX for New-Construction(with Hanging Bars)

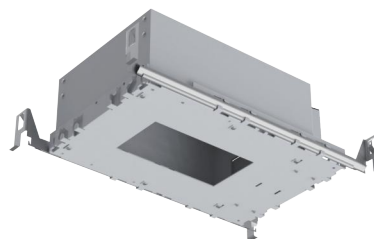


NCBX-S36


For P.GEEK trim&trimless

Cut out:

Square: □ 6"×3" (□ 150*77mm)

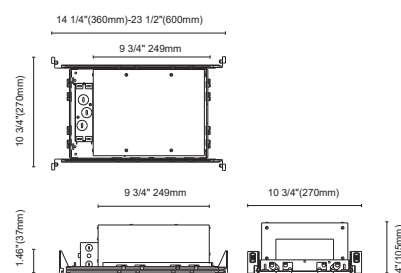

Cut out



Rough-in Plate for New-Construction




BRKT-S36

For P.GEEK trim & trimless

Cut out:

Square: □ 6"×3" (□ 150*77mm)

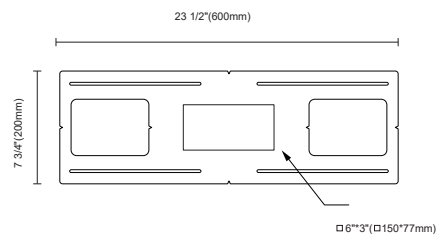



Remark

Tailored brackets are available with a reasonable surcharge, details as below



- The customized bracket's dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests

For more information, please get in touch with XRZLux sales.




GK75-S01QS2

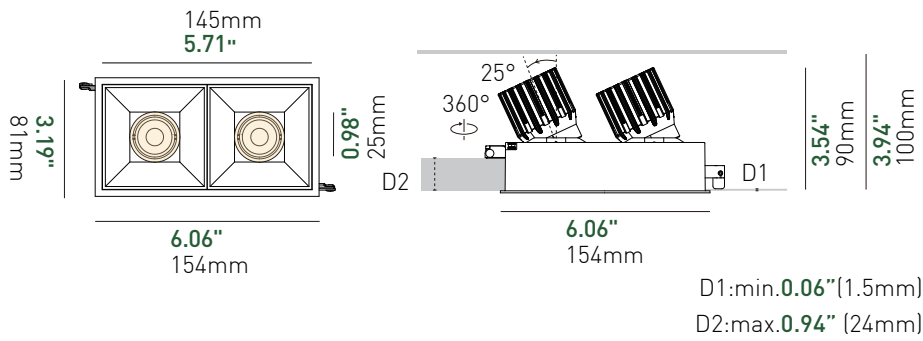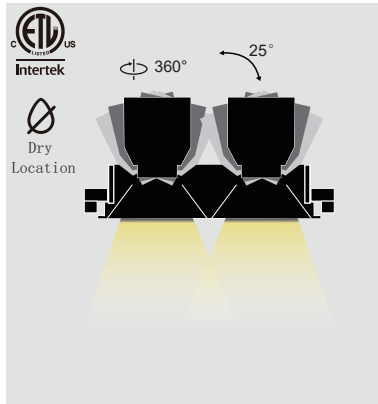

GK75-S01QT2

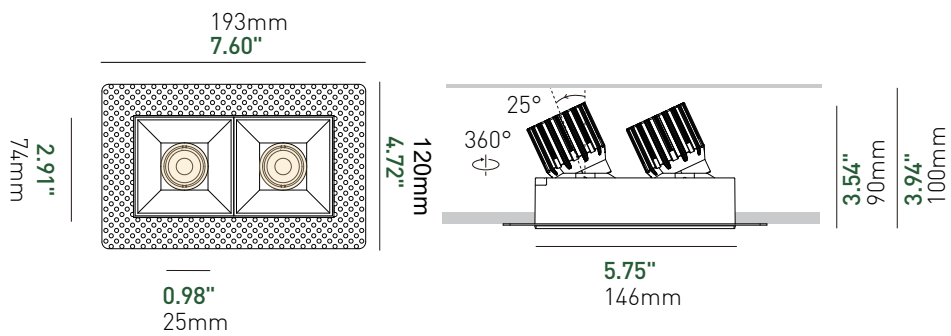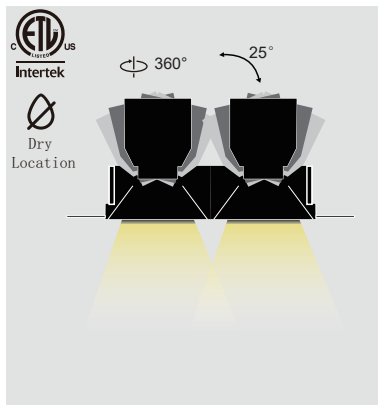

Microflange

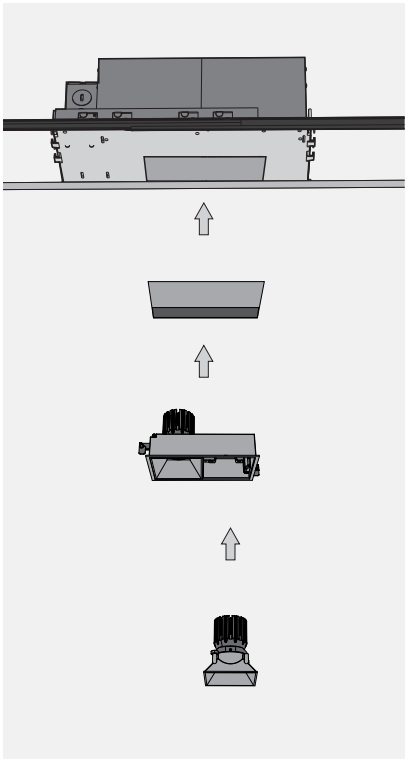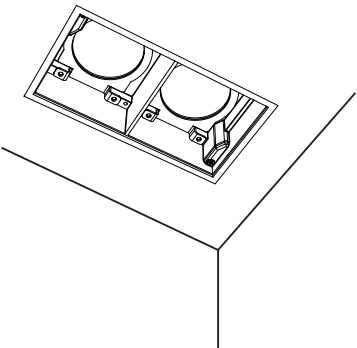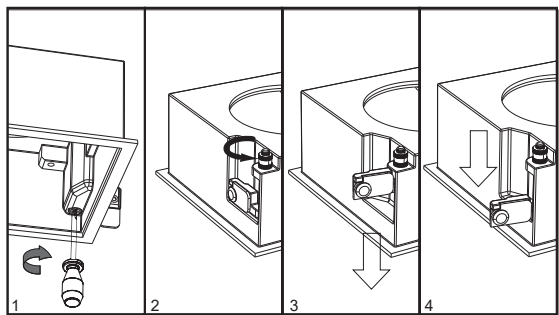

Trimless Drywall

