



GK75-S01QS4



GK75-S01QT4



P.GEEK 3"

GK - - - - -

XRZLux GEEK	SHAPE	VERSION	TRIM	FRAME FINISH	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	HOUSING
GK75	S Square	01	QS4 Microflange	B Black	B Black	B Bridgelux	90 90+ CRI 4*15 Watts Lumens Divd.-5940	27 2700K 30 3000K 35 3500K 40 4000K	50 50° 35 35°	CMEM55 On/Off; Triac PhaseDim; 0-10V Dim 120VAC KIG On/Off; Triac Phase Dim; 0-10V Dim 120/277VAC *Remote Placed	NCP-S66 Rough-in Plate with Hanging Bars NCBX-S66 IC Box with Hanging Bars BRKT-S66 Rough-in Plate *For more details,pls refer to page 3
			QT4 Trimless Drywall	W White	W White		97 97+ CRI 4*15 Watts Lumens Divd.-4320		50 50° 35 35° 25 25°		
					G Gold		Dim To Warm 90 90+ CRI 4*15 Watts Lumens Divd.-3892	1830 1800-3000K	50 50° 35 35°		
							90 90+ CRI 4*15 Watts Lumens Divd.-4600 *External 5CCT Selector	2765A 2700K 3000K 4000K 5000K 6500K	50 50° 35 35°		
							TUNABLE WHITE 90 90+ CRI 4*15 Watts Lumens Divd.-4600	2765 2700-6500K	25 25°	*Dali 2ch Driver Remote Placed	

Order Code Example: GK75-S01QS4-W-W-B-90-35-50

Accessories




SF
Soft Lens




HC
Honeycomb Louver

Photometry


Beam angle: 50°
Delivered Lumens: 5940 lumens
CCT: 4000K
CRI: 90
Power: 4*15W
Efficacy: 99lm/W

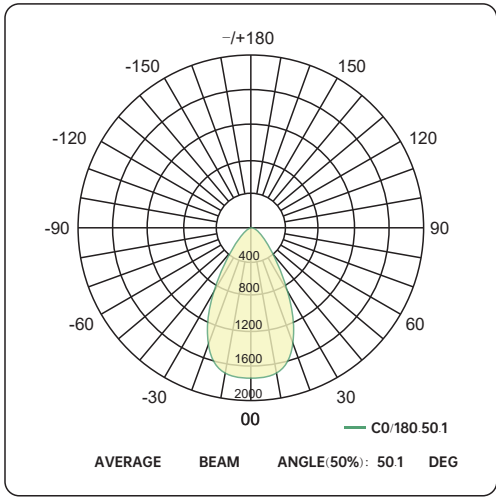

Beam angle: 35°
Delivered Lumens: 5520 lumens
CCT: 4000K
CRI: 90
Power: 4*15W
Efficacy: 92lm/W

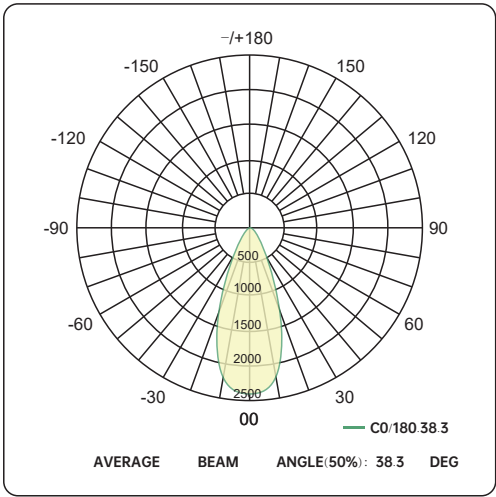


Beam angle: 25°
Delivered Lumens: 3780 lumens
CCT: 4000K
CRI: 97
Power: 4*15W
Efficacy: 63lm/W

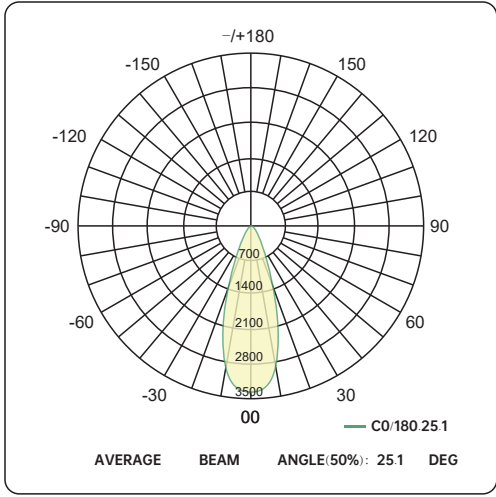

HOUSING

Rough-in Plate for New-Construction (with Hanging Bars)

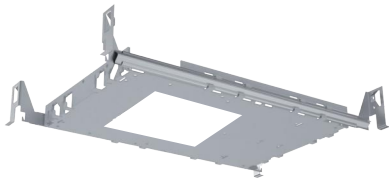


NCP-S66


For P.GEEK trim&trimless

Cut out:

Square: □ 6"×6" (□ 150*150mm)

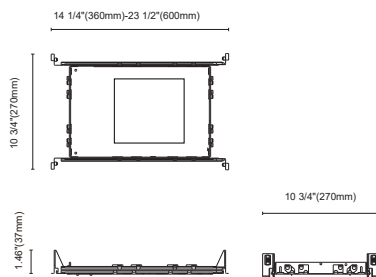

IC-BOX for New-Construction(with Hanging Bars)

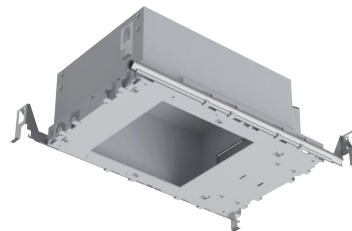


NCBX-S66


For P.GEEK trim&trimless

Cut out:

Square: □ 6"×6" (□ 150*150mm)

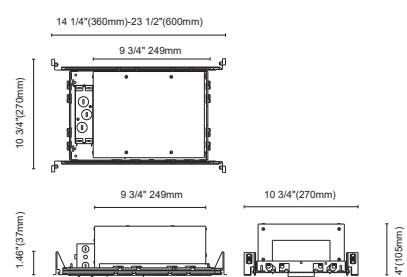

Cut out



Rough-in Plate for New-Construction




BRKT-S66

For P.GEEK trim & trimless

Cut out:

Square: □ 6"×6" (□ 150*150mm)

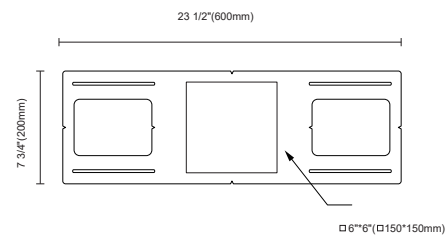




Remark

Tailored brackets are available with a reasonable surcharge, details as below




- The customized bracket's dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests

For more information, please get in touch with XRZLux sales.




GK75-S01QS4

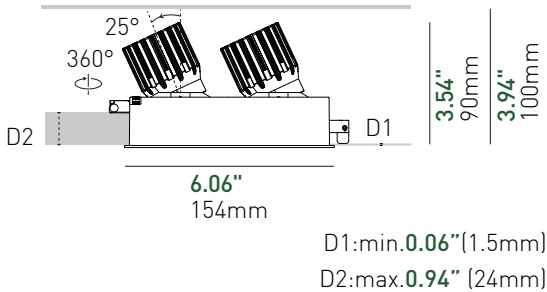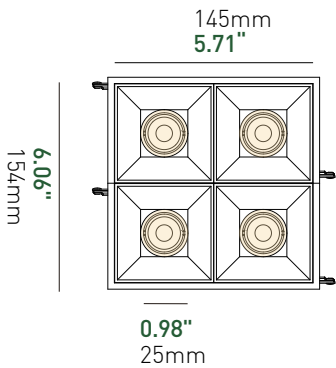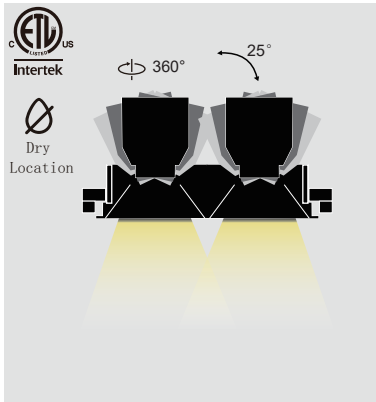

GK75-S01QT4

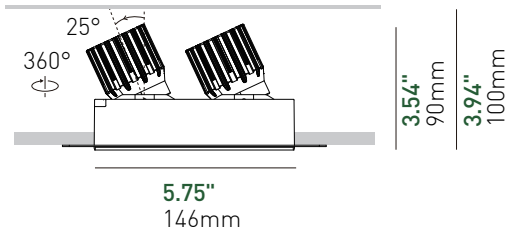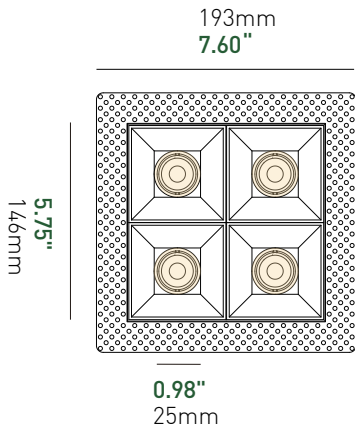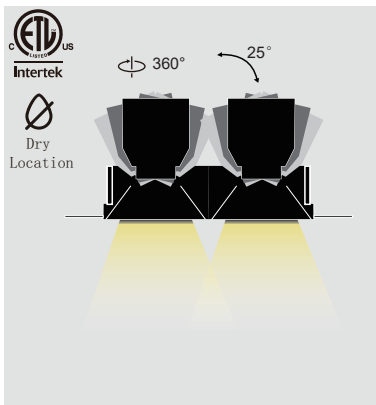

Microflange

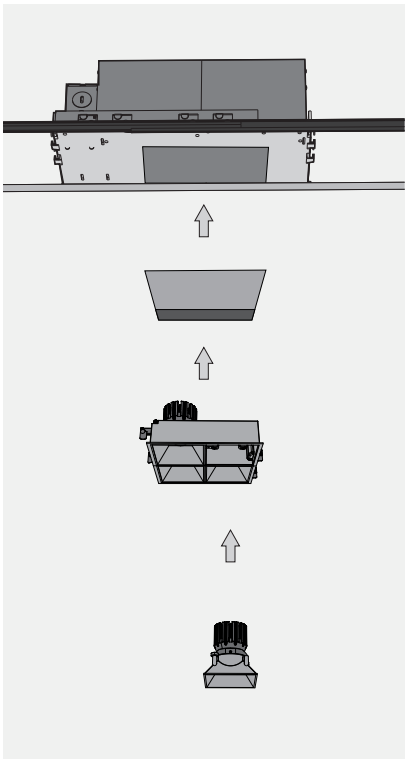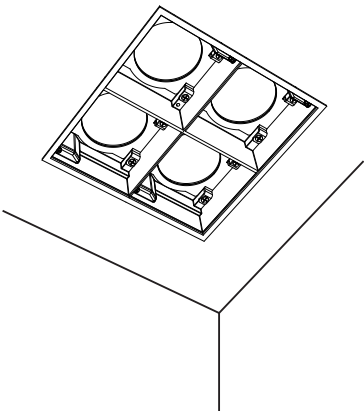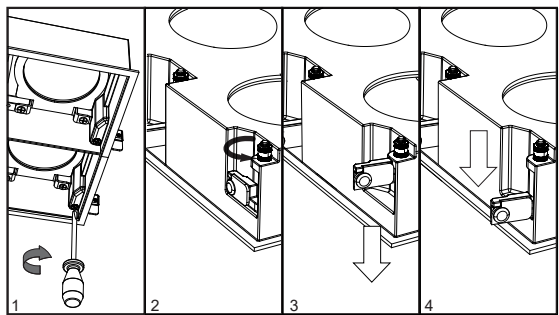

Trimless Drywall

